MYTHIQUE MARBLE™ & MICROBAN

PROTECTION THAT LIVES ON

COLORBODY™ & GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC TILE

AMERICAN OLEAN®

MARBLE LOOK



AMERICAN OLEAN®



Cover photo features Majestic, 12 x 24 on the floor.
Above photo features Bottcino 8" Hexagon on the wall and 12 x 24 on the floor.

MYTHIQUE MARBLE™ & MICROBAN

PROTECTION THAT LIVES ON

COLORBODY™ & GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC TILE

AMERICAN OLEAN®

FINISHES: MATTE | POLISHED

USAGE: FLOOR | WALL | COUNTERTOP | SHOWER FLOOR | EXTERIOR FLOOR

MATERIAL: PC COLORBODY PORCELAIN | PG GLAZED PORCELAIN | CG GLAZED CERAMIC


PRICING: LOW — HIGH

SPECIAL FEATURES: STEPWISE™ | TRUEDGE™ | REVEAL SYNC3D™ | MADE IN THE U.S.A. | LARGE FORMAT | MOSAIC/DECO | ENCAUSTIC | TERRAZZO | PAVER | CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK

COLORBODY™ PORCELAIN FLOOR TILE

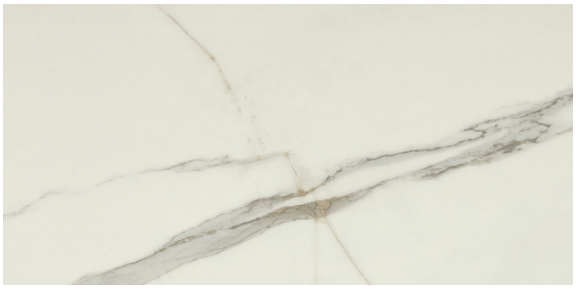

CALACATTA VENECIA MY11



ALTISSIMO MY10



BOTTICINO MY13



MAJESTIC MY12

GLAZED PORCELAIN 8" HEXAGON FLOOR TILE



CALACATTA VENECIA MY11



ALTISSIMO MY10




BOTTICINO MY13




MAJESTIC MY12

GLAZED CERAMIC ARABESQUE MOSAIC TILE 11" X 12" SHEET




CALACATTA VENECIA MY15



ALTISSIMO MY14



BOTTICINO MY17



MAJESTIC MY16

SLIP RESISTANT | WATERPROOF | STAINPROOF | DENTPROOF | SCRATCH-RESISTANT | FIRE-RESISTANT | CLIMATEPRO™ | SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

MYTHIQUE MARBLE™ & MICROBAN®

PROTECTION THAT LIVES ON

COLORBODY™ & GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC TILE

AMERICAN OLEAN®

FINISHES: MATTE | POLISHED

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: PC COLORBODY PORCELAIN, PG GLAZED PORCELAIN, CG GLAZED CERAMIC

PRICING: LOW — HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK

SIZES

			THICKNESS	FINISH	MADE IN U.S.A
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	M P	
	12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M P	
	12 x 12 Floor Tile	11-5/8" x 11-5/8" (29.56 cm x 29.56 cm)	5/16"	M P	
	8" Hexagon Floor Tile	7-7/8" x 7-15/16" (19.95 cm x 23.04 cm)	5/16"	M	
	Arabesque Mosaic Tile (Dot-mounted)	11" x 12" Sheet (27.94 cm x 30.48 cm Sheet)	1/4"	M	

Made in the U.S.A. designation is subject to change. Please visit americanolean.com for the most current manufacturing information.

M Matte Finish

P Polished Finish (Available in MY11 and MY13 only)

*Microban is available in 24 x 24, 12 x 24, 12 x 12, and mosaic tile only.

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors - Standard Center Drain	≥ 0.42	●**
Shower Floors - Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	●**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Matte floor and mosaic tile only.

** Mosaic tile only.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

POST-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

CERTIFIED PORCELAIN TILE 0.5% or less water absorption

ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

TRIM

			NUMBER	FINISH
	Floor Bullnose	3 x 12	P43C9	M P

M Matte Finish P Polished Finish (available in MY11, MY13 only)

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.) **8" Hex Floor Tile:** 3/16" **Mosaic Tile:** 1/8"	HIGH (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	<3.0%
Breaking Strength	C648	≥ 275 lbf	≥ 250 lbf
Scratch Hardness	C1895	6.0 (Polished) 8.0 (Matte)	7.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	(4)	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

888.AOT.TILE

AMERICAN OLEAN®

AMERICANOLEAN.COM

©2026 AMERICAN OLEAN (7/26)