


PERSPECTA™

GLAZED CERAMIC WALL

AMERICAN OLEAN®



WALL

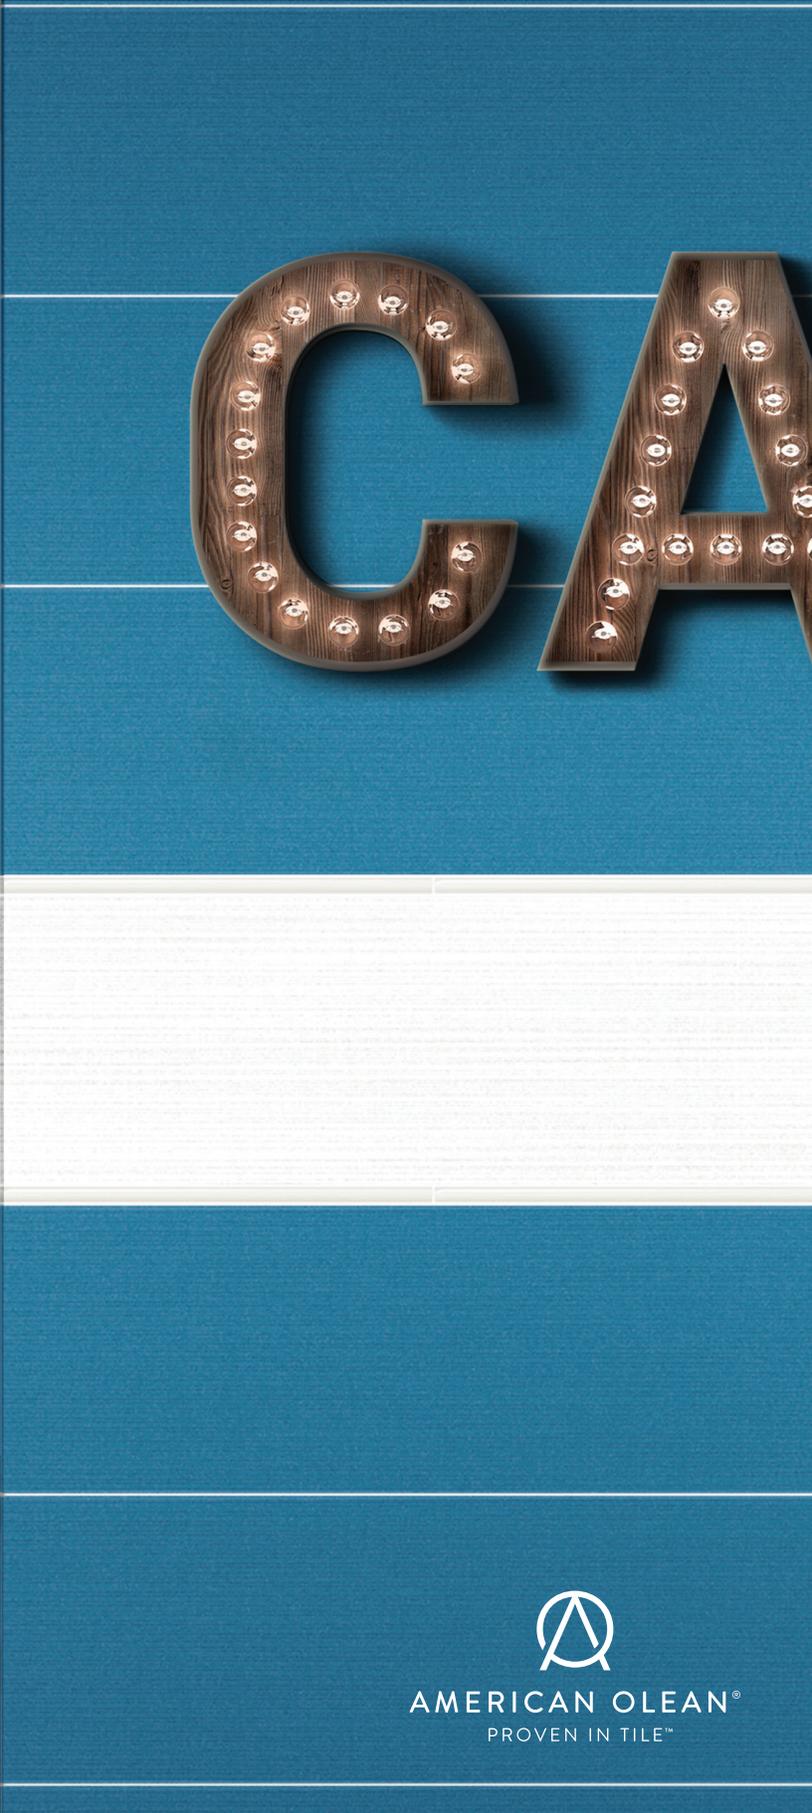

AMERICAN OLEAN®
PROVEN IN TILE™

PERSPECTA™

Sleek linear wall designs come to life through Perspecta by American Olean.

A soft pinstripe graphic achieved through Reveal Imaging® runs the length of this 8x24 wall tile for a hint of movement and subtle sophistication. With a vast array of colors ranging from bright and bold to contemporary classic, this collection also offers coordinating jolly trim in each color for a refined finish. In both residential and commercial settings, Perspecta provides options to cover the full spectrum of style appeal.



Cover photo features Perspecta™ Pacific Blue and Cirrus White 8 x 24 on the wall with Theoretical™ Logical Gray 12 x 24 on the floor.

PERSPECTA™

GLAZED CERAMIC WALL

AMERICAN OLEAN®

FINISHES: GLOSSY

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



SEE CHARTS FOR FULL PRODUCT DETAILS.

WALL


WALL TILE



CIRRUS WHITE PE09 (1)



CLOSE-UP

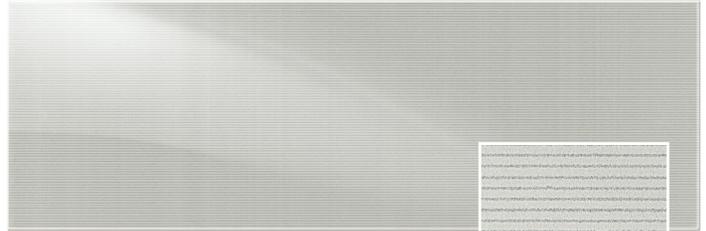

GRAVITY GRAY PE10 (1)




CLOSE-UP



PACIFIC BLUE PE11 (1)



CLOSE-UP

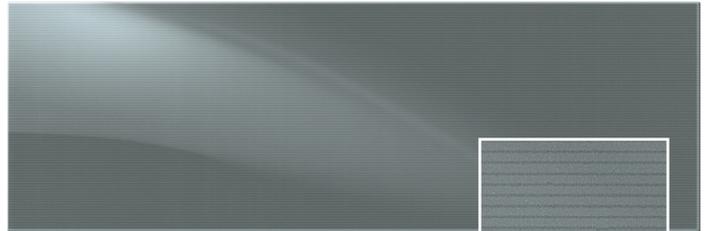

STELLAR GRAY PE12 (1)



CLOSE-UP

JOLLY (SOLID COLORS)



CIRRUS WHITE PE18



GRAVITY GRAY PE19



PACIFIC BLUE PE20



STELLAR GRAY PE21



STAINPROOF



DENTPROOF



FIRE-RESISTANT



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: GLOSSY


USAGE



MATERIAL



PRICING



SPECIAL FEATURES



SEE CHARTS FOR FULL PRODUCT DETAILS.

WALL

SIZES

	THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
8 x 24 Wall Tile	5/16"	13.30	10

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

FEATURES



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

TRIM

	NUMBER	PIECES/ CARTON
12" Jolly	1/2 x 12	S1/212J 12

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (1/8" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 LOW (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	RESULT
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120 - 230 lbs.
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

