


WALL

PERSPECTA™  
GLAZED CERAMIC

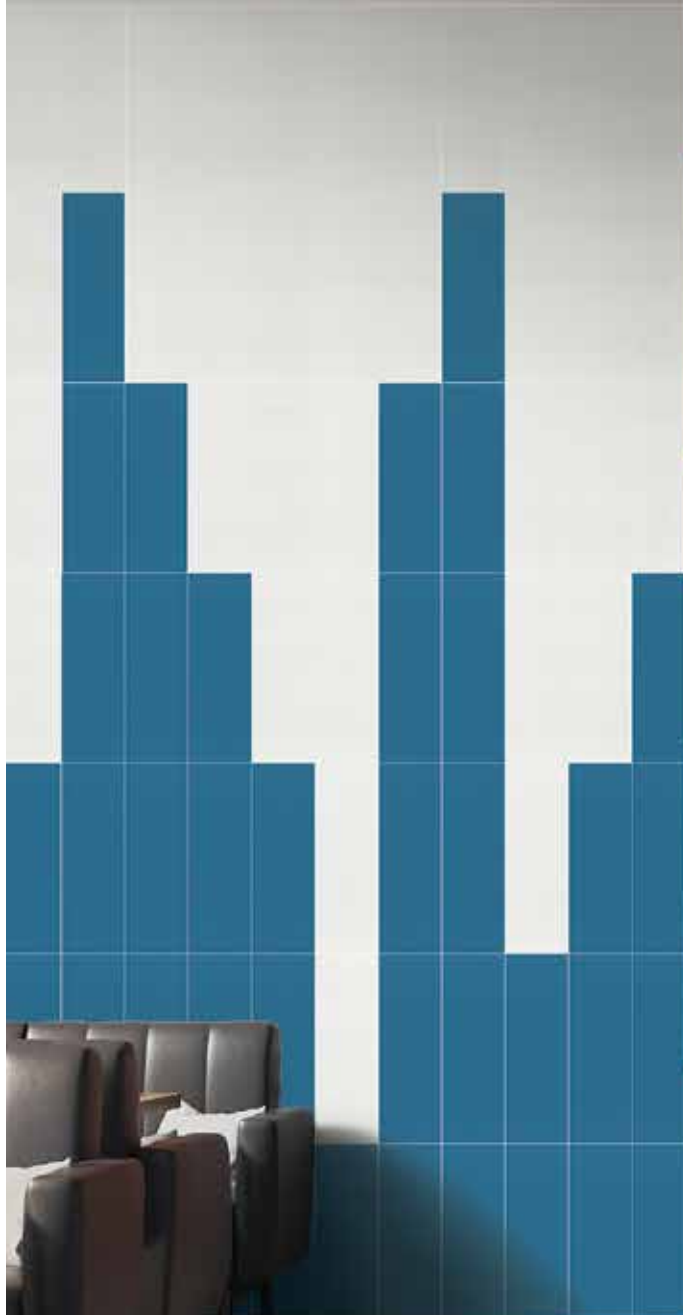

AMERICAN OLEAN®  
PROVEN IN TILE™

Photo features Perspecta Pacific Blue and Cirrus White 8 x 24 on the wall with Theoretical™ Logical Gray 12 x 24 on the floor.

**PERSPECTA™ GLAZED CERAMIC WALL WITH REVEAL IMAGING®**

Sleek linear wall designs come to life through Perspecta™ by American Olean®. A soft pinstripe graphic achieved through Reveal Imaging® runs the length of this 8x24 wall tile for a hint of movement and subtle sophistication. With a vast array of colors ranging from bright and bold to contemporary classic, this collection also offers coordinating jolly trim in each color for a refined finish. In both residential and commercial settings, Perspecta provides options to cover the full spectrum of style appeal.

PERSPECTA™

**GLAZED CERAMIC WALL TILE**



**JOLLY TRIM (SOLID COLORS)**



(1) & (2) notations indicate price group, (1) being the least expensive.



All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).




Photo features Perspecta Pacific Blue and Cirrus White 8 x 24 on the wall with Theoretical™ Logical Gray 12 x 24 on the floor.

**SIZES**

|   |                     |                                   | THICKNESS | SQ. FT./<br>CARTON | PIECES/<br>CARTON |
|---|---------------------|-----------------------------------|-----------|--------------------|-------------------|
|  | 8 x 24<br>Wall Tile | 8" x 24"<br>(20.34 cm x 61.03 cm) | 5/16"     | 13.30              | 10                |

**TRIM**

|   |           |          |  | NUMBER  | PIECES/<br>CARTON |
|---|-----------|----------|--|---------|-------------------|
|  | 12" Jolly | 1/2 x 12 |  | S1/212J | 12                |

**INSTALLATION & PRICING**

**RECOMMENDED GROUT JOINT:**

Wall: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)

**RELATIVE PRICING:** Medium

**SHADE VARIATION**



LOW  
(V1)


**PERFORMANCE CHARACTERISTICS**

|                     | ASTM# | WALL<br>RESULT |
|---------------------|-------|----------------|
| Water Absorption    | C373  | < 20.0%        |
| Breaking Strength   | C648  | 120 - 230 lbs. |
| Scratch Hardness    | MOHS  | 4.0 - 6.0      |
| Chemical Resistance | C650  | Resistant      |
| Abrasion Resistance | C1027 | N/A            |

**USAGE**

| FLOORS  | WALLS | COUNTERTOPS   |
|---|-------|---|
|  | W     |  |

**APPLICATIONS**

|  | TARGET<br>DCOF WET | SUITABLE  |
|--|--------------------|---|
| Dry & Level – Interior Floor   | N/A                |   |
| Wet & Level – Interior Floor   | ≥ 0.42             |   |
| Shower Floors<br>(Residential or Light Commercial)   | ≥ 0.42             |   |
| Exterior Floor Applications<br>(including pool decking & other<br>wet areas with minimal footwear) | ≥ 0.60             |   |
| Ramps & Inclines   | ≥ 0.65             |   |
| Walls/Backsplashes   | N/A                |  |
| Countertops  | N/A                |   |
| Pool Linings   | N/A                |   |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

**APPLICATION NOTES:**

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

**NOTES**

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.



All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).