

# PRIMSTONE™

GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC

AMERICAN OLEAN®



STONE LOOK



AMERICAN OLEAN®  
PROVEN IN TILE™

# PRIMSTONE™

A simplistic staple, this stone look tile creates a cohesive design solution for your project. Capturing cool and warm tones, Primstone is patterned after the Lucca stone found in the Tuscany region of Italy and its subtle movement provides the perfect backdrop for any space. Proudly made in the U.S.A., this porcelain tile comes in two essential colors with a matte finish.



Cover photo features Primstone™ Buff, 12 x 24 matte on the floor and 1-1/2" Hex mosaic on the backsplash.  
Above photo features Primstone™ Ash, 12 x 24 matte on the floor and Playscapes™ Linen, Silverside & Meringue, 4" Hex on the wall.



FINISHES: MATTE

USAGE	MATERIAL	PRICING	SPECIAL FEATURES
FLOOR WALL COUNTERTOP SHOWER FLOOR EXTERIOR FLOOR	PG GLAZED PORCELAIN	LOW HIGH	STEPWISE™ TRUEEDGE™ MADE IN THE U.S.A. LARGE FORMAT MOSAIC/DECO ENCAUSTIC TERRAZZO PAVER CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## STONE LOOK

### GLAZED PORCELAIN FLOOR TILE




BUFF PR60




ASH PR61

### GLAZED CERAMIC MOSAIC

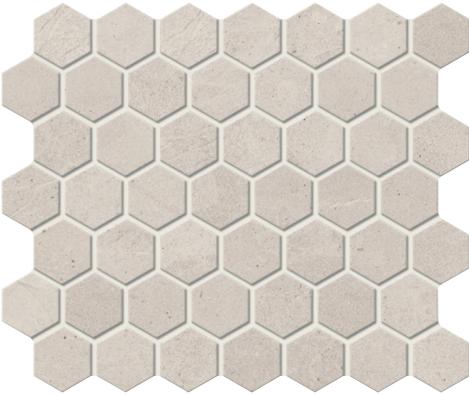

BUFF PR60

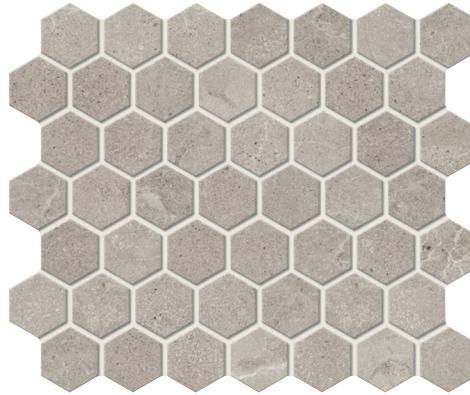

ASH PR61

- SLIP RESISTANT
- WATERPROOF
- STAINPROOF
- DENTPROOF
- SCRATCH-RESISTANT
- FIRE-RESISTANT
- CLIMATEPRO™
- SIMPLICLEAN™

VISIT [AMERICANOLEAN.COM/WHYTILE](http://AMERICANOLEAN.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# PRIMSTONE™

GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC

AMERICAN OLEAN®

FINISHES: MATTE

## USAGE



## MATERIAL



## PRICING



## SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## STONE LOOK

## SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	12 x 24 Floor Tile	11-7/8" x 23-5/8" (30.23 cm x 60.12 cm)	5/16"	17.60	9
	1-1/2 Hexagon Mosaic (Dot-mounted)	11-5/8" x 10-1/4" (29.53 cm x 26.04 cm Sheet)	1/4"	9.72	12

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	●
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●*

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

### APPLICATION NOTES:

Floor: Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic: Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

\* Mosaic tile only

## TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	P43C9	30

## INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor: 3/16" (Overlap should not exceed 33% when installing tile with length 15" or greater in a staggered brick-joint pattern.)</p> <p>Mosaic: 1/8"</p>	<p>MEDIUM (V2)</p>

## PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbs.	> 250 lbs.
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## DURABILITY

### Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Use of a white latex modified thin-set is recommended for installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

## FEATURES



POST-CONSUMER  
RECYCLED MATERIALS



PRE-CONSUMER  
RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®



All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).

888.AOT.TILE



AMERICAN OLEAN®  
PROVEN IN TILE™

AMERICANOLEAN.COM

©2023 AMERICAN OLEAN (1/23)