

REFINED METALS™

METAL WALL TILE

AMERICAN OLEAN®



WALL



AMERICAN OLEAN®
PROVEN IN TILE

REFINED METALS™

Refined Metals is an inspired metallic collection with finishes to complement both traditional and contemporary spaces. This modern interpretation of classic cast-metal designs is made in the U.S.A. with recycled content and features popular sizes designed to work in tandem with other American Olean® design collections. The metallic finish is protected by Q-Seal™ to make it stain and scratch-resistant for lasting beauty.



Cover and above photos feature Refined Metals Stainless 4 x 8 Gloss Linear Wave.

REFINED METALS™

METAL WALL TILE

AMERICAN OLEAN®

FINISHES: GLOSSY

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR




EXTERIOR FLOOR

MATERIAL



METAL

PRICING



LOW HIGH

SPECIAL FEATURES



STEPWISE™



TRUE EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE

SEE CHARTS FOR FULL PRODUCT DETAILS.

WALL

HAMMERED METAL WALL TILE – SATIN



STAINLESS RM54




BRONZE RM55




GUNMETAL RM56


HAMMERED METAL WALL TILE – GLOSS

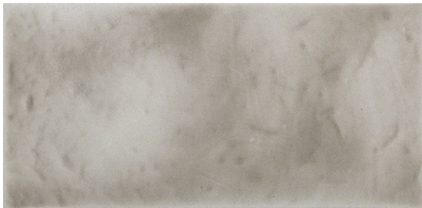

STAINLESS RM51

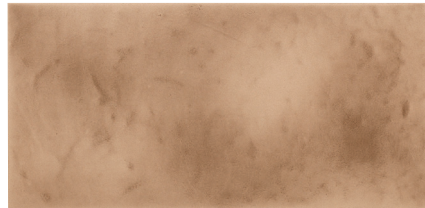


BRONZE RM52

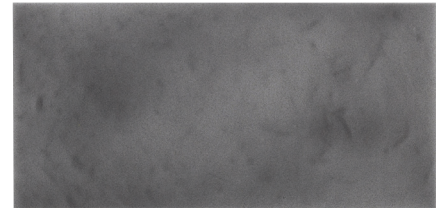


GUNMETAL RM53


LINEAR METAL WALL TILE – GLOSS

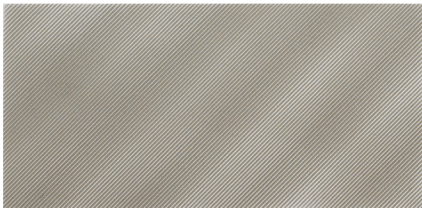

STAINLESS RM51

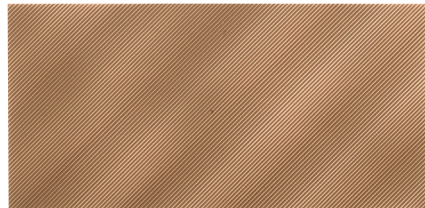

BRONZE RM52

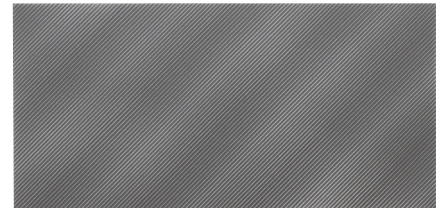

GUNMETAL RM53

JOLLY TRIM



STAINLESS SATIN RM54



BRONZE SATIN RM55



GUNMETAL SATIN RM56



STAINLESS GLOSS RM51



BRONZE GLOSS RM52



GUNMETAL GLOSS RM53

Special Order - Please contact your American Olean Customer Service Representative for more details.

REFINED METALS™

METAL WALL TILE

AMERICAN OLEAN®

FINISHES: GLOSSY


USAGE



MATERIAL



PRICING



SPECIAL FEATURES



SEE CHARTS FOR FULL PRODUCT DETAILS.

WALL

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	4 x 8 Wall Tile	4-1/4" x 8-9/16" (10.80 cm x 21.70 cm)	5/16"	--	28
	2 x 8 Wall Tile	2-5/16" x 8-9/16" (5.30 cm x 21.70 cm)	5/16"	--	56

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for interior applications only when proper installation methods are followed. Recommended for use as a wall covering in interior, vertical applications. They are not suitable for flooring, countertops or exterior installations. Product can be installed in wet areas such as backsplashes, bathroom walls and shower enclosures, but are not recommended in areas with swimming pools or hot tubs because pool chemicals may harm the protective coating.

FEATURES



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

TRIM

			NUMBER	PIECES/ CARTON
	Jolly	1/2 x 12	S1/212J	12

INSTALLATION

Grout Joint Recommendation	Shade Variation
Wall: 1/8"	 MEDIUM (V2)

NOTES

Refined Metals™ is a cast metal collection and is permanently protected by Q-Seal®. For high-temperature installations including kitchen cook tops, fireplace surrounds and steam rooms, follow the high temperature installation instructions to ensure proper adhesion. Due to handcrafted nature of Refined Metals™, variations in structure can be expected and are intended to enhance the visual interest of this artisan product. Special care should be used in installation; see installation instructions for details. For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special Order - Please contact your American Olean Customer Service Representative for more details.

888.AOT.TILE

AMERICANOLEAN.COM



AMERICAN OLEAN®
PROVEN IN TILE™



LEARN MORE