

SOLSTICE™

COLORBODY™ & GLAZED PORCELAIN FLOOR TILE and GLAZED CERAMIC MOSAIC with STEPWISE™ TECHNOLOGY

AMERICAN OLEAN®



STONE LOOK



AMERICAN OLEAN®
PROVEN IN TILE™

SOLSTICE™

Solstice™ combines the timeless looks of marble and slate in a greyscale color palette. The variation of movement characteristic of natural stone is showcased in its extensive size offering which includes 15x30, 4x8, 8" hexagon, a 2x2 mosaic and a cut to size 5x30. Customize your design with lattice or herringbone installation patterns in the 4x8 and 5x30 sizes. The entire collection features StepWise™ Technology making this a perfect selection for outdoor installations like walkways and patios.



50% MORE
SLIP RESISTANT
THAN ORDINARY TILE*

*When compared to the meeting ANSI Standards

Cover photo features Solstice™ Autumn Grey 8" hexagon and 15 x 30 matte on the floor and 2x2 mosaic on the backsplash. Side wall features Unglazed Mosaics Ice White, Black, Light Smoke vintage revival diamond mosaic matte.

Above photo features Solstice™ Winter White 15 x 30 matte on the patio and 8" hexagon matte on the backsplash.

FINISHES: MATTE

USAGE




MATERIAL



PRICING



SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

STONE LOOK


COLORBODY™ PORCELAIN 15 x 30 FLOOR TILE




WINTER WHITE ST32



SPRING GREY ST33

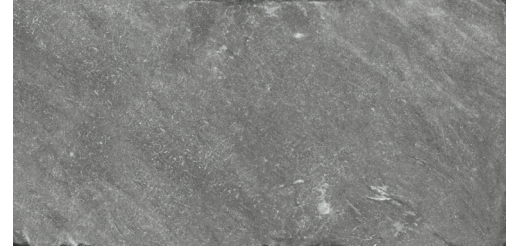

AUTUMN GREY ST34

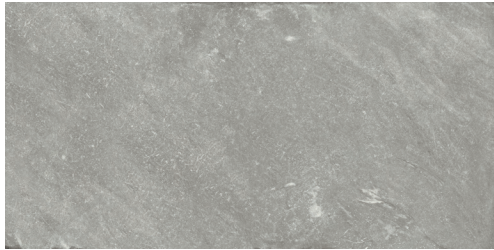


SUMMER MOSS ST35


GLAZED PORCELAIN 4 x 8 FLOOR TILE




WINTER WHITE ST32



SPRING GREY ST33




AUTUMN GREY ST34




SUMMER MOSS ST35


GLAZED PORCELAIN 8" HEXAGON FLOOR TILE




WINTER WHITE ST32



SPRING GREY ST33



AUTUMN GREY ST34




SUMMER MOSS ST35


GLAZED CERAMIC 2 x 2 MOSAIC
12 x 24 SHEET




WINTER WHITE ST32

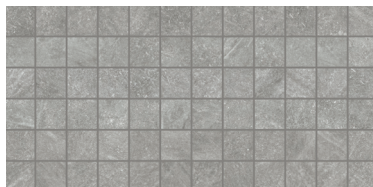

SPRING GREY ST33

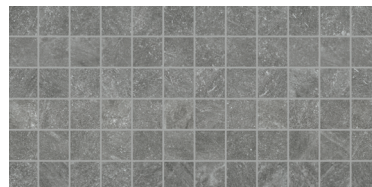

AUTUMN GREY ST34

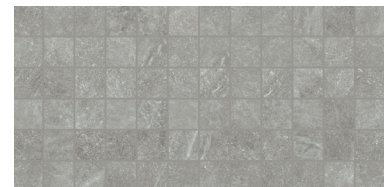

SUMMER MOSS ST35



VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SOLSTICE™

COLORBODY™ & GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC WITH STEPWISE™ TECHNOLOGY

AMERICAN OLEAN®

FINISHES: MATTE

USAGE 	MATERIAL 	PRICING 	SPECIAL FEATURES
------------------	---------------------	--------------------	-----------------------------

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

STONE LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	15 x 30 Floor Tile	14-15/16" x 30" (38.00 cm x 76.30 cm)	5/16"	15.60	5
	5 x 30 Floor Tile	4-11/16" x 30" (12.04 cm x 76.30 cm)	5/16"	11.86	12
	8" Hexagon Floor Tile	7-7/8" x 9-1/8" (20.04 cm x 23.16 cm)	5/16"	9.37	25
	4 x 8 Floor Tile	3-7/8" x 8" (9.84 cm x 20.34 cm)	3/8"	7.92	36
	2 x 2 Mosaic (Dot-mounted)	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12

INSTALLATION & PRICING

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern, overlap should not exceed 33%). Mosaic: 1/8"	

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance		
1	Residential Bathrooms	3 All Residential / Light Commercial
2	All Residential Areas	④ All Residential / Commercial

FEATURES

	POST-CONSUMER RECYCLED MATERIALS		PRE-CONSUMER RECYCLED MATERIALS
	MADE IN THE U.S.A.		REVEAL IMAGING®

MEMBER	CERTIFIED PORCELAIN TILE <small>0.5% or less water absorption</small>	ZEROTOX <small>Healthy Homes Healthy Planet</small>

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

TRIM

			NUMBER	PIECES/ CARTON
	Bullnose	3 x 15	P439B	20

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.
Mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Mosaic tile only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufacture in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation. For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

888.AOT.TILE

AMERICAN OLEAN®
PROVEN IN TILE™

