

SOLSTICE™ +  50% MORE
SLIP RESISTANT
THAN ORDINARY TILE*

COLORBODY™ & GLAZED PORCELAIN FLOOR TILE AND
GLAZED CERAMIC MOSAIC WITH STEPWISE™ TECHNOLOGY

AMERICAN OLEAN®



STONE LOOK



AMERICAN OLEAN®
PROVEN IN TILE™

SOLSTICE™

Solstice™ combines the timeless looks of marble and slate in a greyscale color palette. The variation of movement characteristic of natural stone is showcased in its extensive size offering which includes 15x30, 4x8, 8" hexagon, a 2x2 mosaic and a cut to size 5x30. Customize your design with lattice or herringbone installation patterns in the 4x8 and 5x30 sizes. The entire collection features StepWise™ Technology making this a perfect selection for outdoor installations like walkways and patios.



50% MORE
SLIP RESISTANT
THAN ORDINARY TILE*

*When compared to tile meeting ANSI Standards



Cover photo features Solstice™ Autumn Grey 8" hexagon and 15 x 30 matte on the floor and 2x2 mosaic on the backsplash. Side wall features Unglazed Mosaics Ice White, Black, Light Smoke vintage revival diamond mosaic matte. Above photo features Solstice™ Winter White 15 x 30 matte on the patio and 8" hexagon matte on the backsplash.

FINISHES: MATTE

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR

MATERIAL



COLORBODY PORCELAIN



GLAZED PORCELAIN



GLAZED CERAMIC

PRICING



LOW HIGH

SPECIAL FEATURES



STEPWISE™



TRUEEDGE™



REVEAL SYNC3D™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER




CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

STONE LOOK


COLORBODY™ PORCELAIN 15 x 30 FLOOR TILE

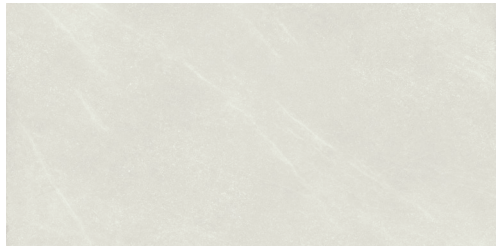


WINTER WHITE ST32



SPRING GREY ST33

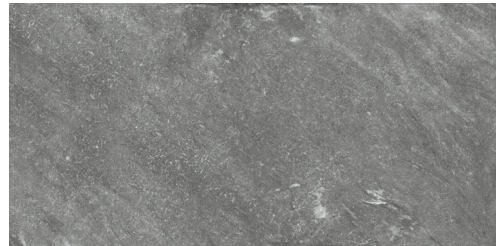


AUTUMN GREY ST34

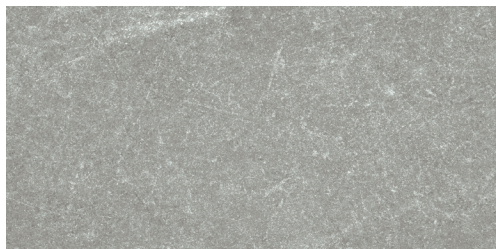


SUMMER MOSS ST35

GLAZED PORCELAIN 4 x 8 FLOOR TILE




WINTER WHITE ST32



SPRING GREY ST33




AUTUMN GREY ST34




SUMMER MOSS ST35


GLAZED PORCELAIN 8" HEXAGON FLOOR TILE




WINTER WHITE ST32



SPRING GREY ST33



AUTUMN GREY ST34



SUMMER MOSS ST35


GLAZED CERAMIC 2 x 2 MOSAIC TILE




WINTER WHITE ST32



SPRING GREY ST33

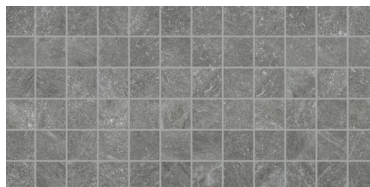

AUTUMN GREY ST34

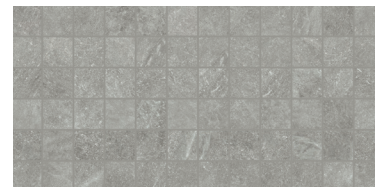

SUMMER MOSS ST35



50% MORE SLIP RESISTANT THAN ORDINARY TILE*



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT








INDOOR/OUTDOOR







SIMPLICLEAN™











VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE

USAGE
 FLOOR
 WALL
 COUNTERTOP
 SHOWER FLOOR
 EXTERIOR FLOOR








MATERIAL
 PC
 PG
 CG

PRICING
 LOW HIGH

SPECIAL FEATURES
 STEPWISE™
 TRUEEDGE™
 REVEAL SYNC3D™
 MADE IN THE U.S.A.
 LARGE FORMAT
 MOSAIC/DECO
 ENCAUSTIC
 TERRAZZO
 PAVES
 CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			THICKNESS	FINISH	MADE IN U.S.A.
	15 x 30 Floor Tile	14-15/16" x 30-1/8" (38.00 cm x 76.50 cm)	5/16"	M	
	5 x 30 Floor Tile	4-11/16" x 30-1/8" (12.04 cm x 76.50 cm)	5/16"	M	
	8" Hexagon Floor Tile	7-7/8" x 9-1/16" (19.95 cm x 23.04 cm)	5/16"	M	
	4 x 8 Floor Tile	4" x 7-15/16" (10.16 cm x 20.26 cm)	3/8"	M	
	2 x 2 Mosaic Tile (Dot-mounted)	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	M	

M Matte Finish

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors - Standard Center Drain	≥ 0.42	●*
Shower Floors - Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	●* ●**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	●
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●***

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Mosaic tile only

** 5 x 30, 4 x 8 and 8" Hex floor tile only.

*** Mosaic and 4 x 8 floor tile only.

FEATURES

 PRE-CONSUMER RECYCLED MATERIALS

 POST-CONSUMER RECYCLED MATERIALS

 REVEAL IMAGING®



ZEROTOX

888.AOT.TILE



AMERICAN OLEAN®
PROVEN IN TILE™


All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

AMERICANOLEAN.COM

©2025 AMERICAN OLEAN (05/25)


STONE LOOK

TRIM

			NUMBER	FINISH
	Bullnose	3 x 15	P439B	M

M Matte Finish

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor Tile: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern, overlap should not exceed 33%.)</p> <p>Mosaic Tile: 1/8"</p> <p>8" Hex & 4 x 8 Floor Tile: 3/16"</p>	 RANDOM (V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbf	>250 lbf
Scratch Hardness	C1895	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.