

# SUNSET FALLS™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAIC

AMERICAN OLEAN®



STONE LOOK



AMERICAN OLEAN®  
PROVEN IN TILE™



## SUNSET FALLS™

Invite the calming effects of the sun setting over the water into your design. With a natural travertine stone-look and gentle linear grain, Sunset Falls provides classic style in timeless tones. Rectangular shapes in several sizes and a herringbone mosaic offer plenty of flexibility for foundational neutrality or a monochromatic vibe.



Cover and above photo features White 12 x 24 on the floor.



# SUNSET FALLS™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAIC

AMERICAN OLEAN®

FINISHES: MATTE

## USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR

## MATERIAL



GLAZED PORCELAIN



GLAZED CERAMIC

## PRICING



LOW HIGH

## SPECIAL FEATURES



STEPWISE™



TRUEEDGE™



REVEAL SYNC3D™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO




PAVER



CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

STONE LOOK

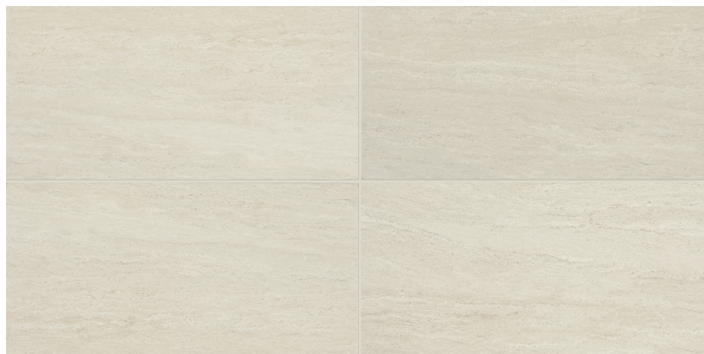

WHITE SF15



BEIGE SF16

## GLAZED CERAMIC WALL TILE



WHITE SF15



BEIGE SF16

## GLAZED CERAMIC MOSAIC



WHITE SF15



BEIGE SF16

## JOLLY TRIM



WHITE SF15



BEIGE SF16



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT [AMERICANOLEAN.COM/WHYTILE](http://AMERICANOLEAN.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# SUNSET FALLS™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAIC

AMERICAN OLEAN®

FINISHES: MATTE

## USAGE




## MATERIAL



## PRICING



## SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## STONE LOOK

## SIZES

			THICKNESS	FINISH	MADE IN U.S.A.
	12 x 24 Floor Tile	11-7/8" x 23-11/16" (30.23 cm x 60.12 cm)	5/16"	M	
	6 x 18 Wall Tile	6" x 18" (15.25 cm x 45.76 cm)	3/8"	M	
	4 x 12 Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"	M	
	1 x 3 Herringbone Mosaic (Dot-mounted)	9" x 12" Sheet (22.86 cm x 30.48 cm Sheet)	1/4"	M	

M Matte Finish

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●*
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors - Standard Center Drain	≥ 0.42	●**
Shower Floors - Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	●**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●*
Pool Linings	N/A	●**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

### APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Wall and mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

\* Floor and mosaic tile only

\*\* Mosaic tile only

## TRIM

			NUMBER	FINISH
	Floor Bullnose	3 x 24	P43F9	M
	Jolly	1/2 x 12	S1/212J	M

M Matte Finish

## INSTALLATION

Grout Joint Recommendation	Shade Variation
<b>Floor:</b> 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	 HIGH (V3)
<b>Wall:</b> (6 x 18) 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.) (4 x 12) 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)	
<b>Mosaic:</b> 1/8"	

## PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	WALL RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbf	120-230 lbf	> 250 lbf
Scratch Hardness	C1895	8.0	4.0 - 6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## DURABILITY

### Floor Surface Wear Resistance

1	Residential Bathrooms	③	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit [americanolean.com](http://americanolean.com)

## FEATURES



PRE-CONSUMER RECYCLED MATERIALS



POST-CONSUMER RECYCLED MATERIALS



REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).



ZEROTOX

888.AOT.TILE



AMERICAN OLEAN®  
PROVEN IN TILE™

AMERICANOLEAN.COM

©2025 AMERICAN OLEAN (08/25)