

UNGLAZED MOSAICS™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®



MOSAIC



AMERICAN OLEAN®
PROVEN IN TILE™

UNGLAZED MOSAICS™

Always a classic, Unglazed ColorBody™ Porcelain Mosaics provide unlimited options for virtually any space. From sophisticated neutrals to saturated deep tones to crisp, contemporary brights, the palette delivers a timeless and trendy color lineup. The size and shape options complete the design story, while standard and custom pattern options offer true freedom of expression.



Cover photo features Unglazed Mosaics™ Diamond Weave 1" hexagon mosaic on the floor.

Above photo features Unglazed Mosaics™ Ice White, Black, and Restore penny round mosaics on the shower wall and floor.

UNGLAZED MOSAICS™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

USAGE



MATERIAL



PRICING




SPECIAL FEATURES




MOSAIC

SOLIDS

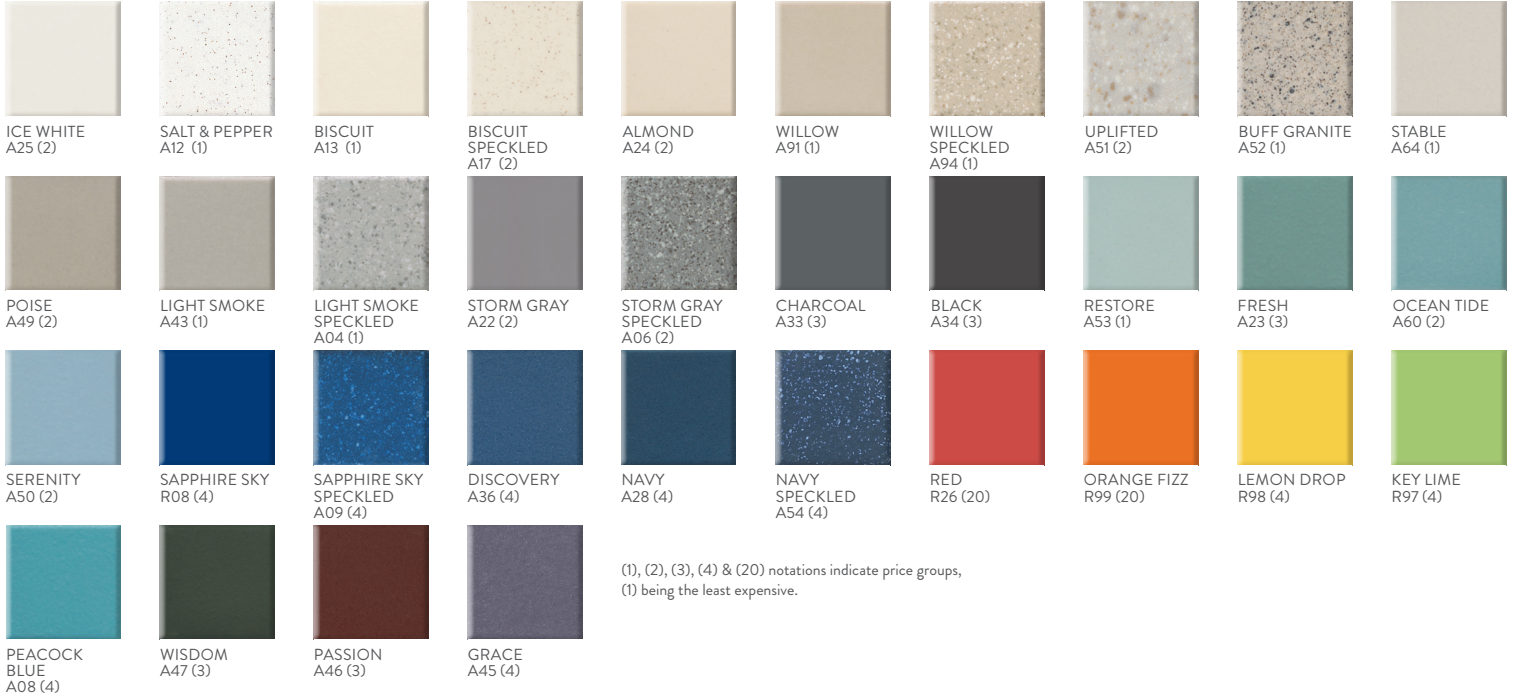

(1), (2), (3), (4) & (20) notations indicate price groups, (1) being the least expensive.

BLENDS

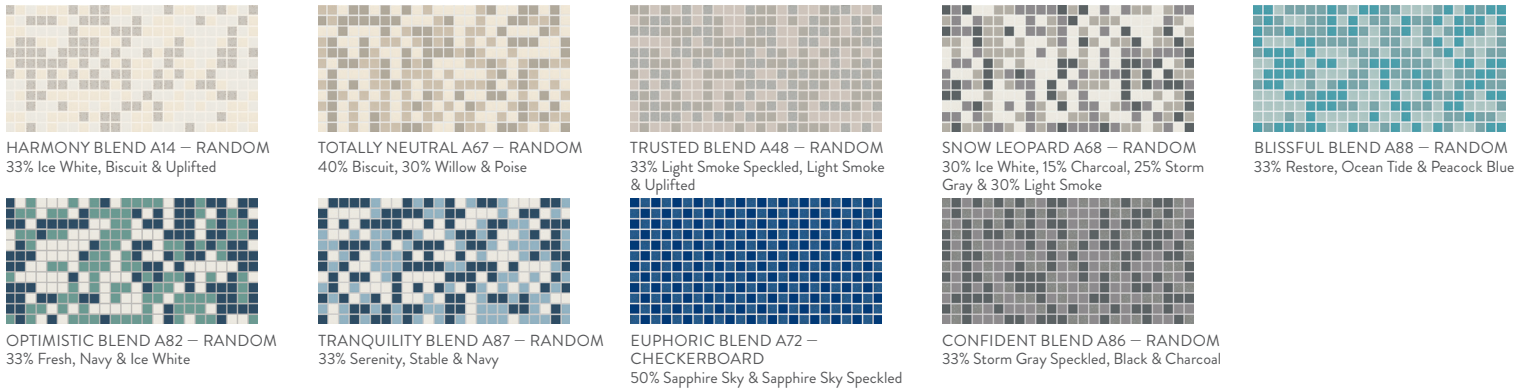

PATTERNS



All colors available in 1" x 1" and 2" x 2" size and can be ordered in patterns and blends on a made to order basis. All other sizes are available in select colors (visit our website for complete product information) and can be ordered in patterns and blends on a made to order basis. Please see the "Pattern and Border Guide" (available on-line) for templates, and for order assistance please contact your local American Olean Sales Representative.



VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

UNGLAZED MOSAICS™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



MOSAIC

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	2 x 2 Mosaic (Dot-mounted)	2" x 2" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12
	1 x 1 Mosaic (Dot-mounted)	1" x 1" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12
	2" Hexagon Mosaic (Dot-mounted)	2" x 2" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.24	12
	1" Hexagon Mosaic (Dot-mounted)†	1" x 1" Piece (12" x 22-5/8" Sheet) (30.48 cm x 58.10 cm Sheet)	1/4"	21.00	12
	Penny Round Solid Colors (Dot-mounted)	1" x 1" Piece (10" x 22" Sheet) (25.40 cm x 55.88 cm Sheet)	1/4"	21.12	12
	Penny Round Retro Dot (Dot-mounted)	1" x 1" Piece (10" x 22" Sheet) (25.40 cm x 55.88 cm Sheet)	1/4"	18.12	12
	Penny Round Rosette (Dot-mounted)	1" x 1" Piece (10" x 22" Sheet) (25.40 cm x 55.88 cm Sheet)	1/4"	17.40	12
	Penny Round Diamond (Dot-mounted)	1" x 1" Piece (10" x 22" Sheet) (25.40 cm x 55.88 cm Sheet)	1/4"	17.40	12
	2 x 1 & 1 x 1 Windmill Mosaic (Dot-mounted)	2" x 1" & 1" x 1" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12

† Sizing applies to solid colors, AO19 and AO20 patterns. However, AO17, AO18 & AO21 patterns have 18.84 sf/carton and 12 pieces/carton.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

FEATURES



PRE-CONSUMER
RECYCLED MATERIALS



MADE IN THE U.S.A.

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	--	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors - Standard Center Drain (Residential or Commercial)	≥ 0.42	●
Shower Floors - Linear Drain	≥ 0.42	●
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.55	●*
Ramps & Inclines	≥ 0.65	●
Walls/Backsplashes	--	●
Countertops	--	●
Pool Linings	--	●
Pool Tanks / Submerged applications	--	●**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest®, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Unglazed mosaics have recurrent grout joints and reflect DCOF of ≥ 0.55 wet making them suitable for these applications.

** Unglazed mosaics with ClearFace™ mounting system recommended for pool tanks and submerged applications.

PERFORMANCE CHARACTERISTICS

	ASTM#	MOSAIC RESULT
Water Absorption	C373	< 0.5 %
Breaking Strength	C648	> 300 lbs
Scratch Hardness	MOHS	7.0 - 8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

INSTALLATION & PRICING

Grout Joint Recommendation	Shade Variation
1/8" Approximately	Medium (V2) (Solid Colors) Random (V4) (Speckled Colors, Random Blends)

UNGLAZED MOSAICS™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE


USAGE




MATERIAL



PRICING



SPECIAL FEATURES




MOSAIC

TRIM INSTALLATION


Trim is available in single linear foot lengths, or it can be ordered with cap and/or cove face-mounted on the sheet with flat tile. Trim members with modular 1 x 1 and 2 x 2 flat tile.

SURFACE TRIM

(typical installation)

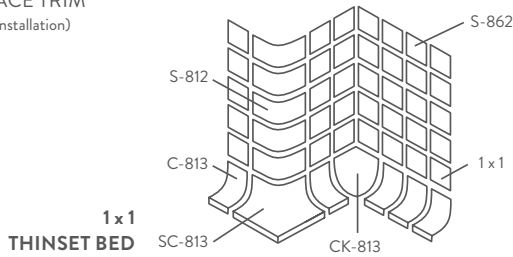


**1 x 1
THINSET BED**

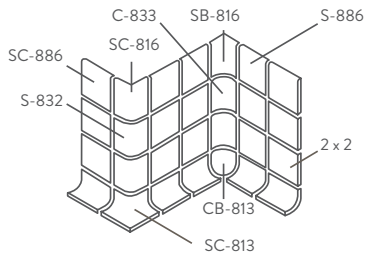


**2 x 2
THINSET BED**

UNIVERSAL TRIM

(typical installation)

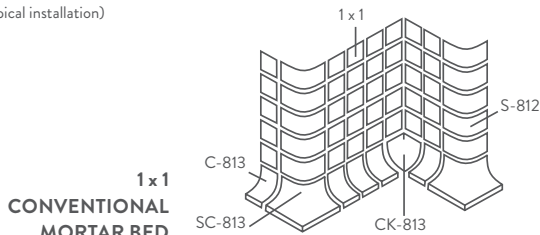

**1 x 1
CONVENTIONAL
MORTAR BED**

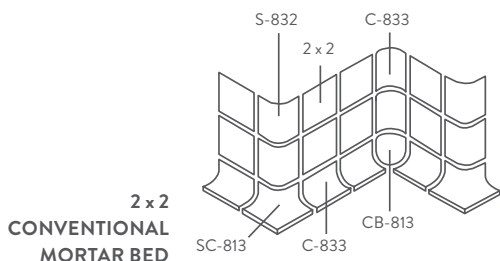

**2 x 2
CONVENTIONAL
MORTAR BED**

TRIM

	Type	Number	Size	Pieces / LF Per Carton	Groups
	Bullnose	S862	1 x 1	196	1, 2
	Bullnose	S886	2 x 2	180	1, 2, 3, 4
	Bullnose Corner	SC862 ♦	1 x 1	100	1, 2
	Bullnose Corner	SC886	2 x 2	100	1, 2, 3, 4
	Cove Base	C813	1 x 1	84	1, 2
	Cove Base	C833	2 x 2	84	1, 2, 3
	Cove Base Corner	CB813	1 x 1	100	1, 2
	Cove Base Corner	CK813	1 x 1	100	1, 2, 3
	Cove Base Corner	SB816 ♦	2 x 2	100	1, 2
	Cove Base Corner	SC816 ♦	2 x 2	100	1, 2
	Outcorner	SCRL833 ♦	2 x 1	100	1, 2, 3
	Universal Trim	S812 ♦	1 x 1	112	1, 2
	Universal Trim	S832	2 x 2	112	1, 2
	Universal Trim	SC813	2 x 2	100	1, 2, 3
	Universal Trim	C701 ♦	2 x 1	50	1, 2, 3, 4
	Build-up Base	MB4C	3 Rows, 1 x 1; 1 Row, C813	26	1, 2, 3
	Build-up Base	MT5	3 Rows, 1 x 1; 1 Row, S862; 1 Row, C813	26	1, 2, 3
	Build-up Base	MT6A	2 Rows, 2 x 2; 1 Row, C833	26	1, 2, 3
	Build-up Base	MT6	1 Row, 2 x 2; 1 Row, C833; 1 Row, S886	26	1, 2, 3

♦ Made-to-order

MOUNTED TILE SHEETS

- Master-Set® back-edge mounting system for ceramic mosaics, borders and pattern designs.
- All glazed and unglazed porcelain mosaic colors are mounted.
- Easy to cut with knife or pointed trowel.
- Strong, flexible 12 x 24 sheets.

UNGLAZED MOSAICS™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



MOSAIC

COLOR NAME		MUNSELL	LRV
0A04	Light Smoke Speckle	3.7Y 6.9/0.6	41.7
0A06	Storm Gray Speckle	1.7Y 5.4/0.2	23.7
0A08	Peacock Blue	2.4B 5.8/4.5	25.8
0A09	Sapphire Sky Speckle	6.3PB 3.6/6.5	8.2
0A12	Salt & Pepper	4.7Y 8.3/0.7	65.8
0A13	Biscuit	3.5Y 8.6/0.9	69.9
0A17	Biscuit Speckled	1.9Y 8.6/1.0	70.6
0A22	Storm Gray	9.8RP 5.5/1.2	24.1
0A23	Fresh	1.2BG 5.5/2.4	23.3
0A24	Almond	2.0Y 8.1/1.4	61.8
0A25	Ice White	0.4GY 8.8/0.4	75.0
0A28	Navy	2.4PB 3.3/2.2	7.2
0A33	Charcoal	8.4PB 3.8/0.4	10.9
0A34	Black	0.3P 3.0/0.2	6.5
0A36	Discovery	4.6PB 3.7/4.9	9.3
0A43	Light Smoke	2.9Y 6.8/0.6	40.2
0A45	Grace	5.6P 4.3/1.9	13.6
0A46	Passion	10.0R 3.5/2.7	9.4
0A47	Wisdom	9.0GY 3.4/1.3	8.2
0A49	Poise	3.3Y 6.1/1.3	31.6
0A50	Serenity	9.4B 6.7/2.9	37.2
0A51	Uplifted	0.5Y 7.9/1.3	57.1
0A52	Buff Granite	2.4Y 6.4/1.1	35.7
0A53	Restore	7.3G 7.2/1.2	46.0
0A54	Navy Speckle	5.1PB 3.8/4.0	9.9
0A60	Ocean Tide	8.2BG 6.2/2.5	30.7
0A64	Stable	2.9Y 7.9/0.7	57.0
0A91	Willow	1.5Y 6.7/1.8	39.9
0A94	Willow Speckle	1.7Y 7.1/1.8	44.7
0R08	Sapphire Sky	6.1PB 3.3/5.2	7.1
0R26	Red	5.6R 4.2/8.8	13.3
0R97	Key Lime	5.6GY 7.1/5.0	44.5
0R98	Lemon Drop	7.1Y 8.2/7.2	66.3
0R99	Orange Fizz	2.2YR 6.3/9.9	36.7

UNGLAZED MOSAICS™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

USAGE




MATERIAL



PRICING



SPECIAL FEATURES



MOSAIC

GROUP 1

COLOR NAME		UNGLAZED 1 x 1 & 2 x 2	PENNY ROUNDS	UNGLAZED 1" HEX	UNGLAZED 2" HEX	TRIM
0A13	Biscuit *	STK	STK	STK	STK	STK
0A52	Buff Granite	STK	--	MTO	--	STK
0A43	Light Smoke	STK	STK	STK	STK	STK
0A04	Light Smoke Spec	STK	--	--	STK	STK
0A53	Restore	STK	MTO	STK	--	+
0A12	Salt & Pepper	STK	STK	--	--	STK
0A64	Stable	STK	STK	STK	STK	X
0A91	Willow *	STK	STK	--	STK	X
0A94	Willow Speckle *	STK	--	--	STK	STK

GROUP 2

COLOR NAME		UNGLAZED 1 x 1 & 2 x 2	PENNY ROUNDS	UNGLAZED 1" HEX	UNGLAZED 2" HEX	TRIM
0A24	Almond	STK	STK	STK	MTO	STK
0A17	Biscuit Spec	STK	--	MTO	--	+
0A25	Ice White	STK	STK	STK	STK	STK
0A60	Ocean Tide *	MTO	--	--	--	+
0A49	Poise	STK	STK	--	STK	X
0A50	Serenty	STK	MTO	MTO	--	+
0A22	Storm Gray *	STK	STK	MTO	STK	X
0A06	Storm Gray Spec	STK	--	--	MTO	STK
0A51	Uplifted	STK	--	--	--	+

GROUP 3

COLOR NAME		UNGLAZED 1 x 1 & 2 x 2	PENNY ROUNDS	UNGLAZED 1" HEX	UNGLAZED 2" HEX	TRIM
0A34	Black *	STK	STK	STK	STK	x
0A33	Charcoal	STK	MTO	MTO	MTO	x
0A23	Fresh	MTO	--	MTO	--	+
0A46	Passion	STK	--	STK	--	+
0A47	Wisdom	MTO	--	MTO	--	+

MTO Made to Order

STK Stocked

STK Trim stocked in S886, SC886, C813, C833, CB813, CK813, S832, SC813, MT6, MT6A, MT5, MT5A and made to order in S862, SC862, SB816, SC816, SCR-L833, S812, C701, CK701 & CC701.

-- Not Available

X Stocked trim in S886, SC886, C833 and SC813. Made-to-Order in SCR-L833, CK813, MT6 and MT6A. No other trim offered.

+ Made-to-order trim in S886, SC886, C833, SCR-L833, CK813, MT6 and MT6A. No other trim offered.

++ Group 4 Trim stocked in S886, SC886. Colors 0A08 and 0A09 MTO in S886, SC886.

* Available with abrasive content on a made to order basis in 1 x 1 and 2 x 2 size.

UNGLAZED MOSAICS™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

USAGE




MATERIAL



PRICING



SPECIAL FEATURES



MOSAIC

GROUP 4

COLOR NAME	UNGLAZED 1 x 1 & 2 x 2	PENNY ROUNDS	UNGLAZED 1" HEX	UNGLAZED 2" HEX	TRIM
0A36 Discovery	STK	MTO	STK	MTO	++
0A45 Grace	MTO	--	MTO	--	MTO
0R97 Key Lime	STK	--	--	--	++
0R98 Lemon Drop	STK	--	--	--	++
0A28 Navy	STK	--	MTO	--	++
0A54 Navy Spec	STK	--	--	--	++
0A08 Peacock Blue	MTO	MTO	MTO	--	MTO
0R08 Sapphire Sky	STK	MTO	MTO	--	++
0A09 Sapphire Sky Spec	MTO	--	--	--	MTO

GROUP 20

COLOR NAME	UNGLAZED 1 x 1 & 2 x 2
0R26 Red#	MTO
0R99 Orange Fizz#	MTO

MTO	Made to Order
STK	Stocked
STK	Trim stocked in S886, SC886, C813, C833, CB813, CK813, S832, SC813, MT6, MT6A, MT5, MT5A and made to order in S862, SC862, SB816, SC816, SCR-L833, S812, C701, CK701 & CC701.
--	Not Available
X	Stocked trim in S886, SC886, C833 and SC813. Made-to-Order in SCR-L833, CK813, MT6 and MT6A. No other trim offered.
+	Made-to-order trim in S886, SC886, C833, SCR-L833, CK813, MT6 and MT6A. No other trim offered.
++	Group 4 Trim stocked in S886, SC886. Colors 0A08 and 0A09 MTO in S886, SC886.
*	Available with abrasive content on a made to order basis in 1 x 1 and 2 x 2 size.

Available in 1x1 and 2x2 only (no trim) on a made to order basis.

CLEARFACE™ MOUNTING SYSTEM

- Unglazed Mosaics™ ClearFace™ is a mounting system intended primarily for use in swimming pools and submerged applications. ClearFace™ mounted tile is a premium product to existing paper-face offerings and supplements dot-mounted mosaics.
- Additionally, ClearFace™ allows the contractor to see chips as they are being installed, allowing for realignment when wet should a chip need adjustment. ClearFace's premium feature includes complete tile-back-to-substrate mortar transfer.
- All Unglazed Mosaics 1" and 2" colors are available on a standard made-to-order basis using the ClearFace™ mounting system.
- Complete tile-to-substrate mortar transfer
- Premium alternative for swimming pool installations
- Provides 100% contact between the tile and setting materials, providing additional bond strength
- Allows for visual inspection and better alignment during installation
- Comes with extended 25-year pro-rated limited warranty



NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface.

Use of a latex modified thin-set is recommended for installation.



888.AOT.TILE



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

©2024 AMERICAN OLEAN (10/24)