



STONE LOOK

# AMBASSADOR™

STONE ATTACHÉ™ COLLECTION – COLORBODY™ PORCELAIN



# AMBASSADOR™

STONE ATTACHÉ™ COLLECTION – COLORBODY™ PORCELAIN

## Display the Utmost Confidence with the Ambassador™ Series


Inspired by the fine-grained quartzite found in the Swiss Alps, the Ambassador series lends high-end styling wherever it's used. Eons of stratification are reflected in the distinctive mono-directional graining of this ColorBody™ porcelain tile. Large format sizes in three handsome colors make the series a natural choice for design possibilities in commercial and residential spaces.

### • MODERN AND ELEGANT FLAIR

- Elegant stone look available in three colors featuring a high level of veining and distinctive patterns
- Four modern sizes including 24 x 48, 24 x 24, 12 x 24, and a 16 x 48 (2 CM Paver) available in AM33 and AM34.

### • HEIGHTENED VERSATILITY

- 12 x 24 available in Light Polished and Matte finishes
- Unique, three-dimensional mosaic adds to the dynamics of this series



### STONE LOOK

### USAGE



### SPECIAL FEATURES

Cover photo features Ambassador™ Jet-Setter Dusk 24 x 48 on the floor and random linear mosaic on the shower wall. Above photo features Ambassador™ Jet-Setter Dusk 12 x 24 on the wall.

SEE CHARTS FOR FULL PRODUCT DETAILS

SIZES:



24 x 48  
Floor Tile



16 x 48  
Paver Tile



24 x 24  
Floor Tile



12 x 24  
Floor Tile



Random Linear  
Mosaic

FINISHES: MATTE | LIGHT POLISHED

COLOR PALETTE



WANDERLUST WHITE



JET-SETTER DUSK



GLOBAL GREY



VOYAGER BLACK

*Note: Available in 2CM Paver only.*

FLOOR TILE – Available in Matte & Light Polished



WANDERLUST WHITE AM36



JET-SETTER DUSK AM34



GLOBAL GREY AM35

PAVER TILE – Available in Matte only



JET-SETTER DUSK AM34




VOYAGER BLACK AM33

RANDOM LINEAR MOSAIC – Available in Matte only



WANDERLUST WHITE AM36

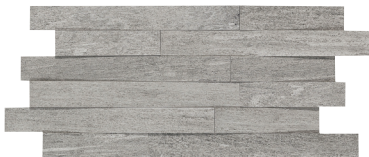

JET-SETTER DUSK AM34



GLOBAL GREY AM35



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT\*  
\*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT\*  
\*Not Applicable to Mesh-Mounted Mosaics



INDOOR/OUTDOOR



SIMPLICLEAN™

# AMBASSADOR™

STONE ATTACHÉ™ COLLECTION – COLORBODY™ PORCELAIN

STONE LOOK

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile ♦	(23-3/8" x 46-15/16") (59.44 cm x 119.20 cm)	5/16"	15.26	2
	16 x 48 Paver Tile ♦♦	(15-9/16" x 47") (39.60 cm x 119.50 cm)	13/16" (2cm)	5.16	1
	24 x 24 Floor Tile ♦	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.20	4
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9
	Random Linear Mosaic ♦ (Mesh-mounted)	(11-1/2" x 24" Sheet) (29.21 cm x 60.96 cm)	5/16"	7.28	4

\* Available in AM33 and AM34 only.

♦ Available in Matte only

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓†
Wet & Level – Interior Floor	≥ 0.42	✓**
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓♦
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓†
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

† Floor tile only.

\* Matte only.

♦ Paver tile only.

**Note:** Mosaic tile is suitable for wall and backsplash only.

## DURABILITY

### Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	④ All Residential / Commercial

PRE-CONSUMER RECYCLED MATERIALS

MADE IN THE U.S.A.

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).

CERTIFIED PORCELAIN™  
TILE  
0.0% or less water absorption



**ZEROTOX**  
Healthy Homes | Healthy Planet

## TRIM

	Type	Number	Size	Pieces/Carton
	Bullnose ♦	S43F9	3 x 24	10
	Cove Base ♦	S36C9	6 x 12	22
	Cove Base Outcorner ♦	SC36C9	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

♦ Available in Matte only

## PAVER TRIM

	Rectified Step Nose	
	Coping	† Trim items available in many sizes and colors.
	Rectified Gutter	Consult with your sales representative and/or design team for specifics.
	Rectified Grid	
	Rectified L-Kerb	

## INSTALLATION

### Grout Joint Recommendation

### Shade Variation

**Floor:** 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)

High (V3)

Mosaics are recommended to be installed with 1/3 offset staggered sheet alignment for desired results.

## PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com).

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).

**daltile**®  
IMAGINE WHAT'S POSSIBLE™  
©2023 Daltile (2/24)