



WALL

ANNAPOLIS™ REMIX
GLAZED CERAMIC



 daltile®
IMAGINE WHAT'S POSSIBLE™

ANNAPOLIS™ REMIX

GLAZED CERAMIC

Expand Horizons With In-Demand, Current Styling

This bigger and better cousin to classic subway tile gives any wall a retro sensibility with contemporary styling. Annapolis™ Remix is subtle enough to work in any room but attracts attention with available detailed finishes like beveled edges and glossy or matte finishes. Expand your horizons with this reinterpreted favorite.

- **UPDATED CLASSIC**
 - Large format size in a classic color is a spin on subway tile
 - Gently beveled edge adds texture and sophistication
- **VERSATILE DESIGN**
 - Simple jolly trim for a holistic finish



Cover and above photo features Annapolis™ Remix Sail bevel 6 x 18 glossy wall tile on the wall.

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



GLAZED CERAMIC



SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES

SIZES:



6 x 18
Wall Tile



6 x 18 Bevel
Wall Tile


FINISHES: MATTE | GLOSSY

FLAT – GLOSSY




SAIL AP06

BEVEL – GLOSSY

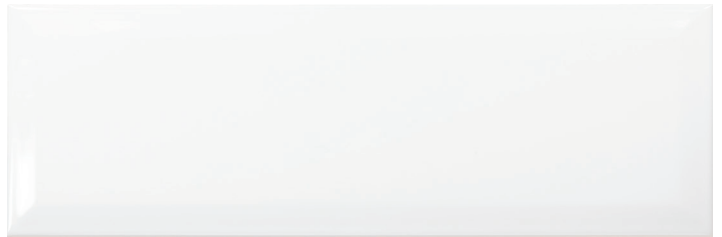


SAIL AP06

FLAT – MATTE

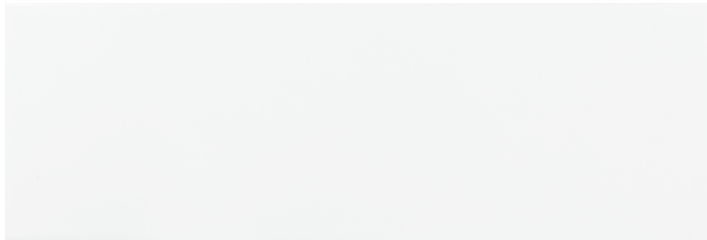

SAIL MATTE AP10

BEVEL – MATTE

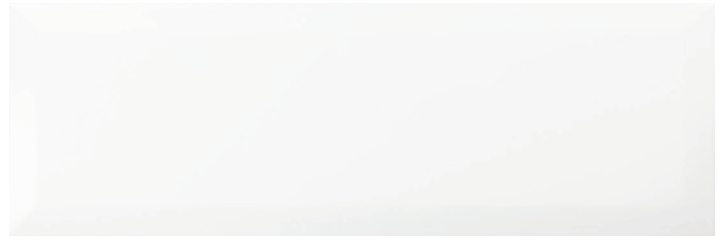

SAIL MATTE AP10



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT





SIMPLICLEAN™

ANNAPOLIS™ REMIX

GLAZED CERAMIC

WALL

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	6 x 18 Wall Tile	(6" x 18") (15.24 cm x 45.72 cm)	5/16" (9.35 mm)	11.28	15
	6 x 18 Bevel Wall Tile	(6" x 18") (15.24 cm x 45.72 cm)	5/16" (9.35 mm)	11.28	15

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	


A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:


Wall tile has continuous lug.

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

TRIM

	Type	Number	Size	Pieces/ Carton
	12" Jolly	S1/212J	1/2 x 11-15/16	12

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%)	 Low (1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.



POST-CONSUMER
RECYCLED MATERIALS



PRE-CONSUMER
RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

ZEROTOX
Healthy Homes | Healthy Planet

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com.

daltile
IMAGINE WHAT'S POSSIBLE™

©2023 Daltile (11/23)