



MOSAIC

ARTEFINO™ JEWEL
GLAZED PORCELAIN



 daltilo®
IMAGINE WHAT'S POSSIBLE™

ARTEFINO™ JEWEL

GLAZED PORCELAIN

Artefino Jewel emerges as a series with a sophisticated charm within our Artefino collection. A palette of deep jewel tones and sultry mosaics, this series reshapes your interiors into vibrant canvases of artistic expression. Unveil the hidden treasures of Artefino and transform your space into a masterpiece.

MOSAIC

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



REVEAL SYNC3D™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



LOW HIGH

SPECIAL FEATURES



Cover photo features Artefino™ Jewel Antiqued Brass, Framed Hexagon mosaic on the backsplash and ONE Quartz Surfaces® Calacatta Cathedral on the countertop. Above photo features Artefino™ Jewel Emerald, Pyramid hexagon mosaic on the wall and Panoramic Porcelain Surfaces™ Opalite on the counter.

SEE CHARTS FOR FULL PRODUCT DETAILS

SIZES:



Framed
Hexagon Mosaic




Pyramid
Hexagon Mosaic

FINISHES: GLOSSY | SATIN


2-1/2" FRAMED HEXAGON MOSAIC



ANTIQUED BRASS AR21

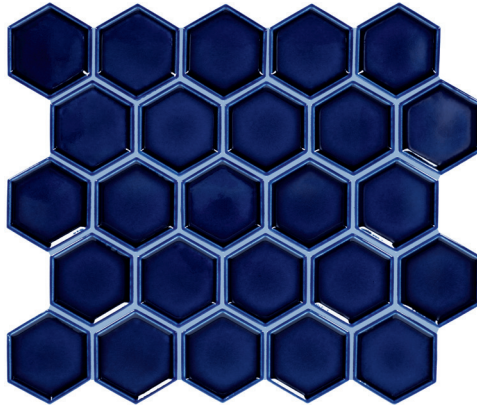


SAPPHIRE AR19

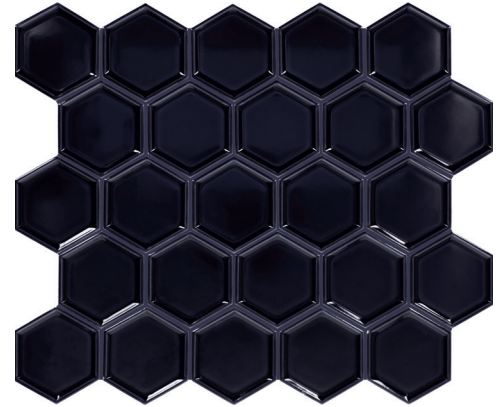


OBSIDIAN AR20


3" PYRAMID HEXAGON MOSAIC

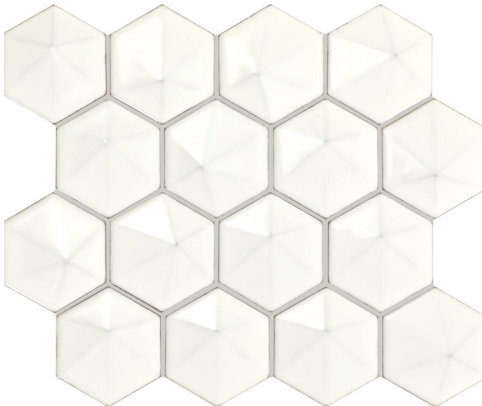

OYSTER AR27

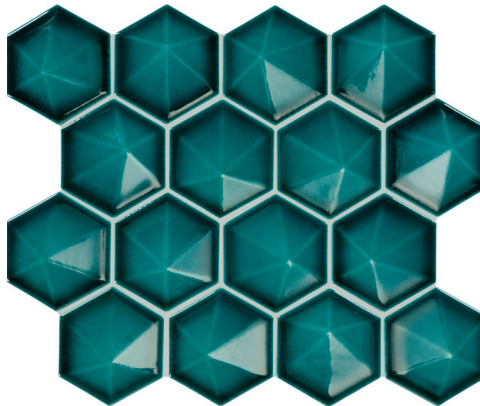

AQUAMARINE AR25

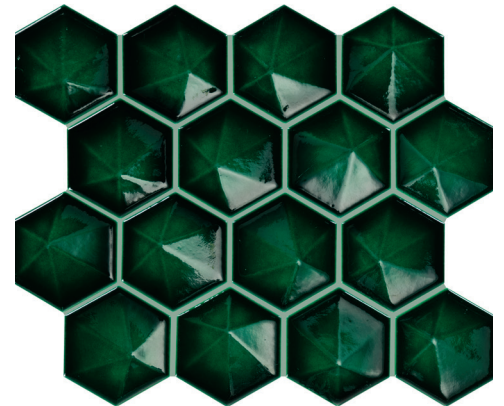

EMERALD AR26



WATERPROOF



STAINPROOF



DENTPROOF



CLIMATEPRO™





SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

ARTEFINO™ JEWEL

GLAZED PORCELAIN

SIZES

			Thickness	Finish
	2-1/2" Framed Hexagon Mosaic (Mesh-mounted)	(14-7/16" x 12-1/16" Sheet) (36.60 cm x 30.61 cm Sheet)	1/4"	G S
	3" Pyramid Hexagon Mosaic (Mesh-mounted)	(12-1/16" x 11-1/8" Sheet) (30.61 cm x 28.19 cm Sheet)	5/16"	G

G Glossy finish **S** Satin Finish available in color AR21 only.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 5.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	C1895	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic)	
	≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Medium (V2)

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.