

Professional
TILE SOLUTIONS



MOSAIC LOOK

WALL
CAPRICE™
GLASS MOSAICS

 **daltile®**
IMAGINE WHAT'S POSSIBLE™

Playfully Lavish

This linear glass tile isn't your run-of-the-mill accent tile. It commands attention with a spirited flair. Use it to create a trend-forward accent wall or oversized kitchen backsplash. It's at home acting simply as an accent to larger, more traditional tile or can hold its own used more liberally. Wake up your design with the color and pencil-thin delicacy of Caprice.

- MORE THAN AN ACCENT
 - Glass linear tile can stand alone on a wall or add flair as an accent
 - Four neutral colors and four playful color blends that complement any design
 - Adds 3-dimensional texture
- EASY MAINTENANCE
 - Simple to keep clean, treat as you would any glass
 - No fade color keeps your design vibrant

MOSAIC LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



GLASS



SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES

SIZES:



5/16 x Random
Interlocking Mosaic


FINISHES: MATTE | GLOSSY

GLOSSY AND FROSTED INTERLOCKING GLASS


SOLIDS



ICE WHITE F167

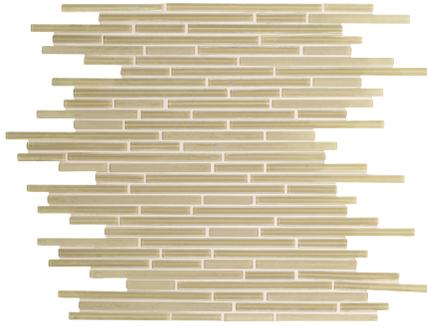

CREME SODA F168

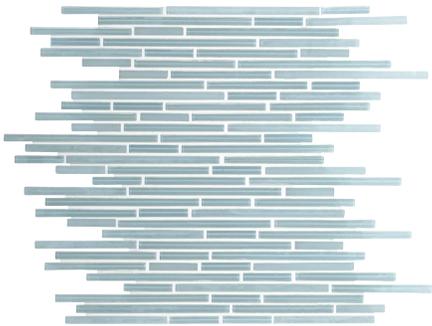

WHISPER GREEN F165



KINETIC KHAKE F166

BLENDS



VANILLA BLEND F170



MINK BLEND F171



CRIMSON BLEND F172



CONTRAST BLEND F169

SIZES

	Thickness	Sq. Ft./ Carton	Pieces/ Carton
 5/16 x Random Interlocking Mosaic (Mesh-mounted) (12-3/4" x 11-11/16" Sheet) (32.40 cm x 29.70 cm Sheet)	5/16"	9.60	10

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" Approximately	 Random (V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Use of a white thin-set suitable for glass tile is recommended for installation.