



COLOR WHEEL™ – LINEAR PATTERN GUIDE

AVAILABLE COLORS & FINISHES

SEMI-GLOSS



BLACK
K111 (2)



ARCTIC WHITE
0190 (1)



BISCUIT
K175 (1)




URBAN PUTTY
0161 (2)



ARCHITECTURAL
GRAY 0109 (2)



DESERT GRAY
X114 (1)



SUEDE GRAY
0182 (2)



CHALKBOARD
0180 (2)

MATTE



MATTE BLACK
K711 (2)



MATTE ARCTIC WHITE
0790 (1)



MATTE BISCUIT
K775 (1)



MATTE URBAN PUTTY
0761 (2)



MATTE ARCHITECTURAL
GRAY 0709 (2)



MATTE DESERT GRAY
X714 (1)



MATTE SUEDE GRAY
0782 (2)



MATTE CHALKBOARD
0780 (2)

ACCENT*



MUSTARD
1012 (3)



ORANGE BURST
1097 (3)



CURRANT
SH17 (3)



EMERALD
0115 (3)



SEA BREEZE
1174 (3)



OCEAN BLUE
1049 (3)




NAVY
K189 (3)




PLUM CRAZY
1178 (3)

*Accent available in Semi-Gloss finish only.


PATTERN DESIGNER




4 x 12 | 4 x 8 | 2 x 8

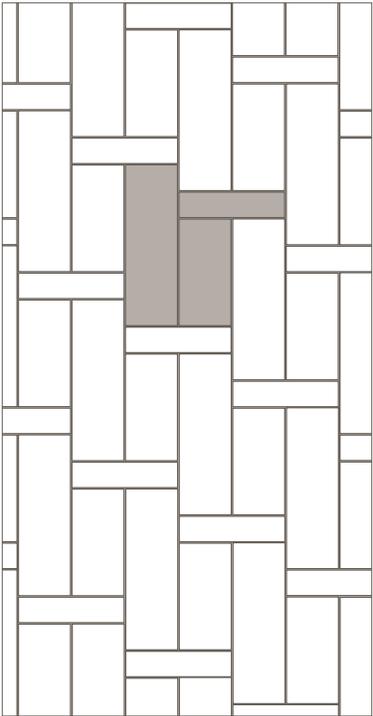


4 x 12 | 4 x 8 | 2 x 8

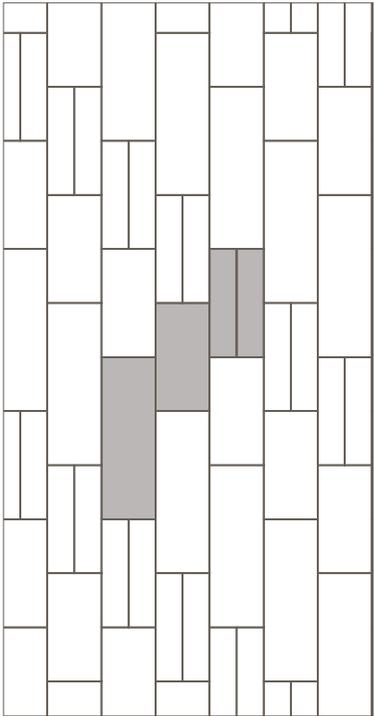


4 x 12 | 4 x 8 | 2 x 8

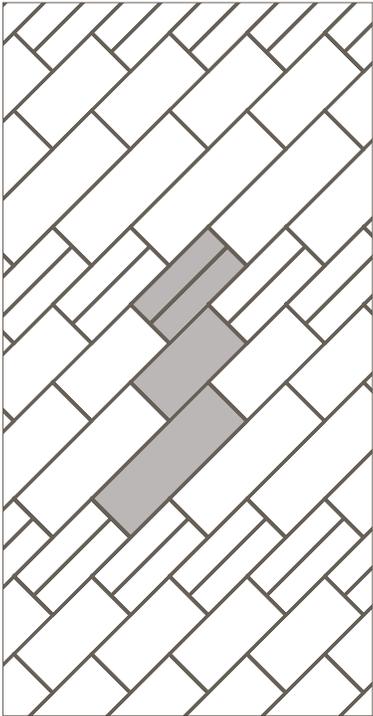

4 x 12 | 4 x 8 | 2 x 8

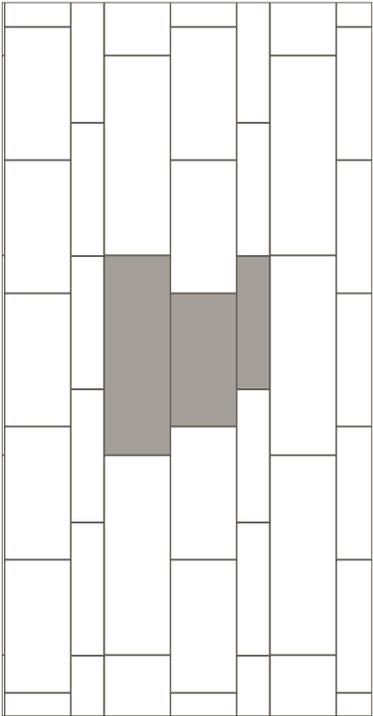


4 x 12 | 4 x 8 | 2 x 8

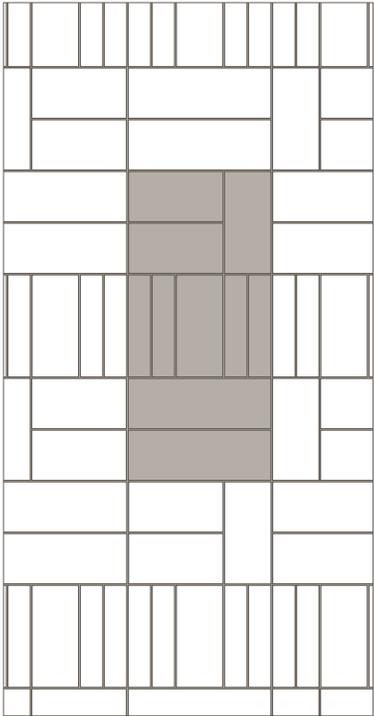


4 x 12 | 4 x 8 | 2 x 8


PATTERN DESIGNER

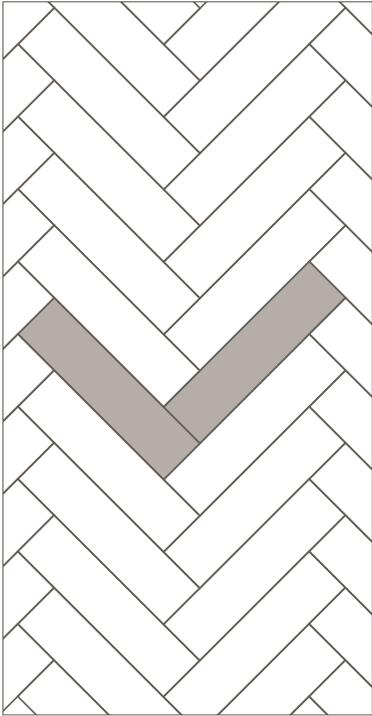


4 x 16

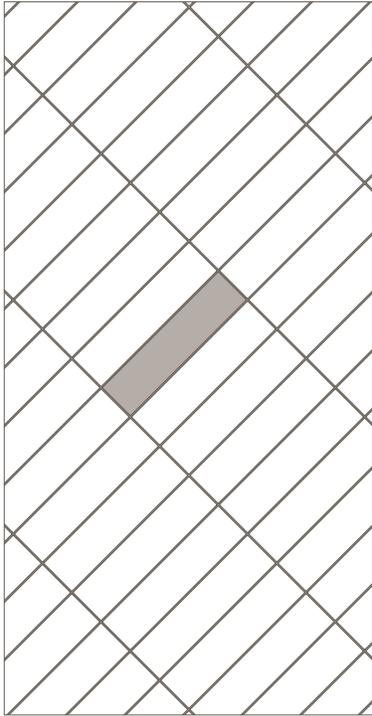


4 x 16

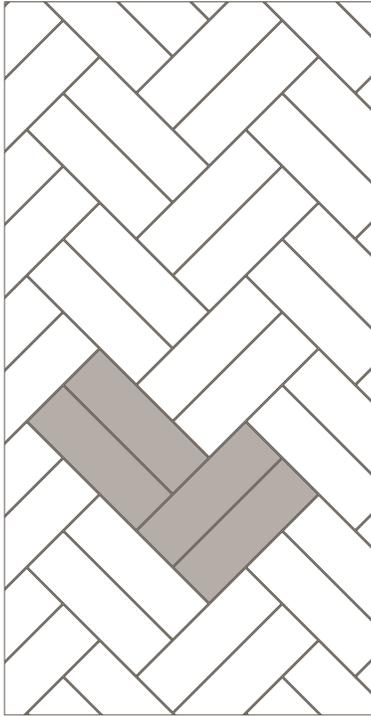


6 x 18

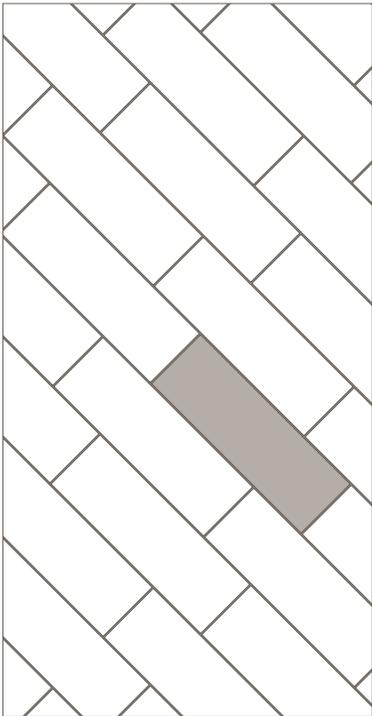

8 x 24

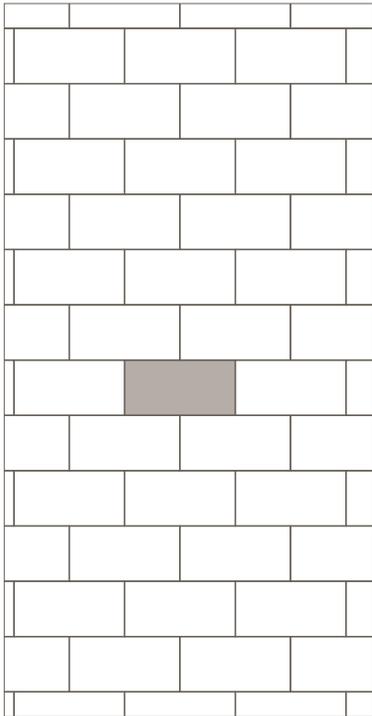


4 x 8

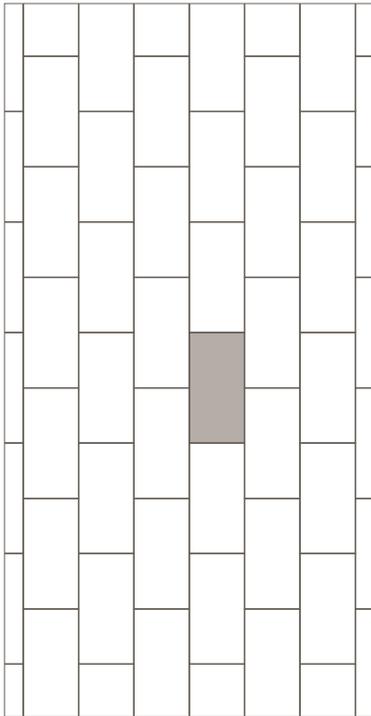


4 x 8


PATTERN DESIGNER

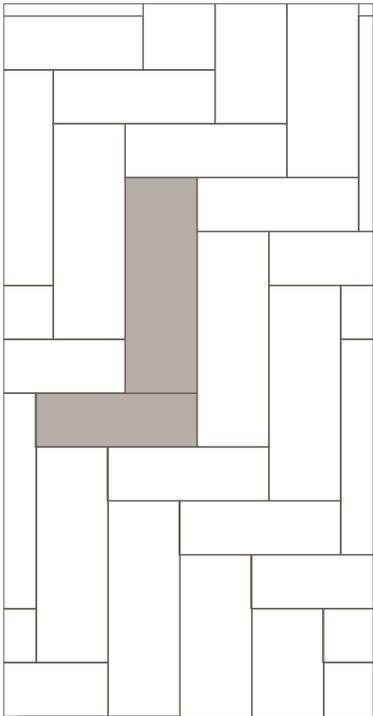


6 x 18 | 8 x 24

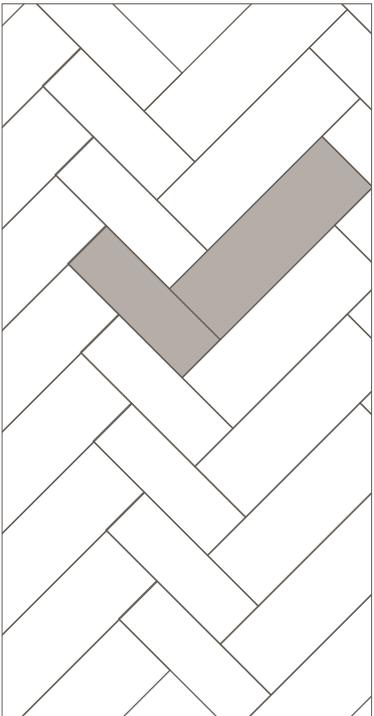


6 x 18 | 8 x 24

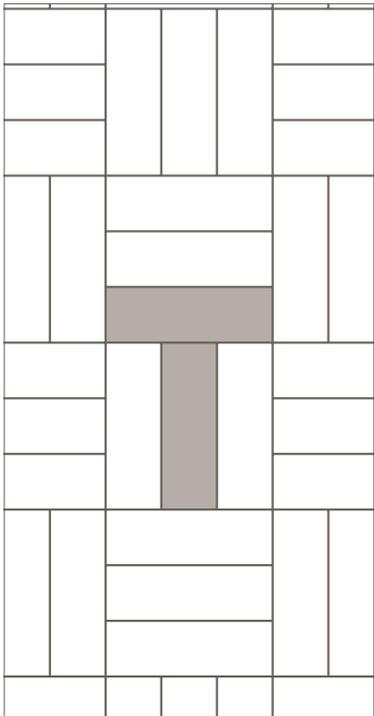


8 x 24

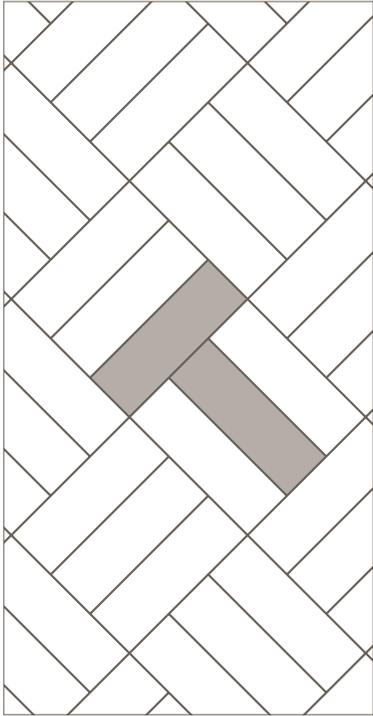

8 x 24

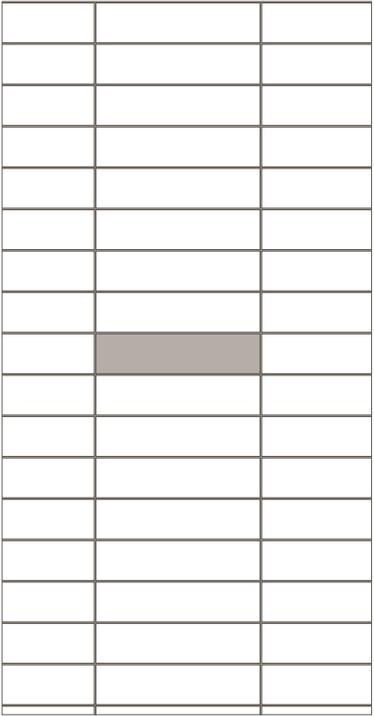


4 x 16

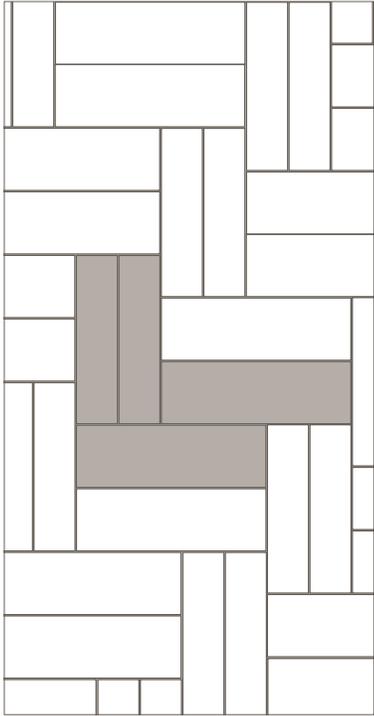


4 x 16 | 6 x 18


PATTERN DESIGNER

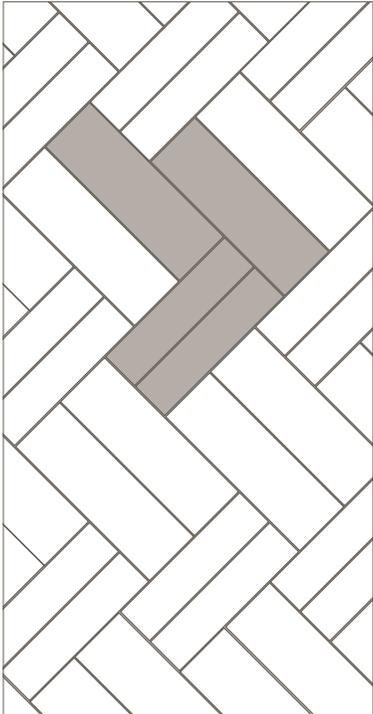


4 x 16 | 6 x 18

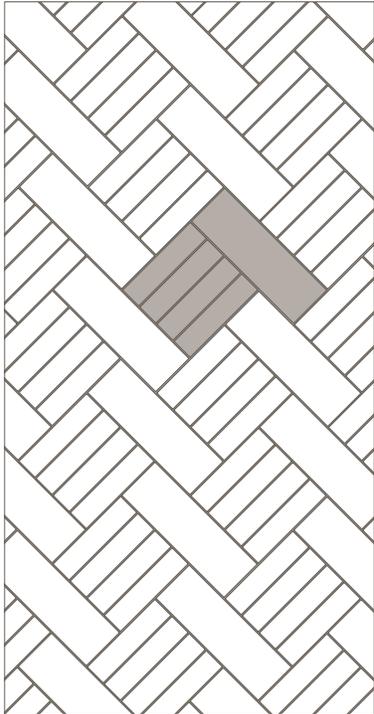


2 x 8 | 4 x 12

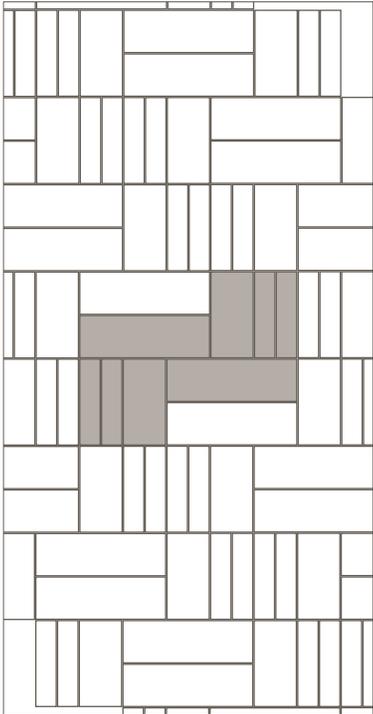


2 x 8 | 4 x 8 | 4 x 12

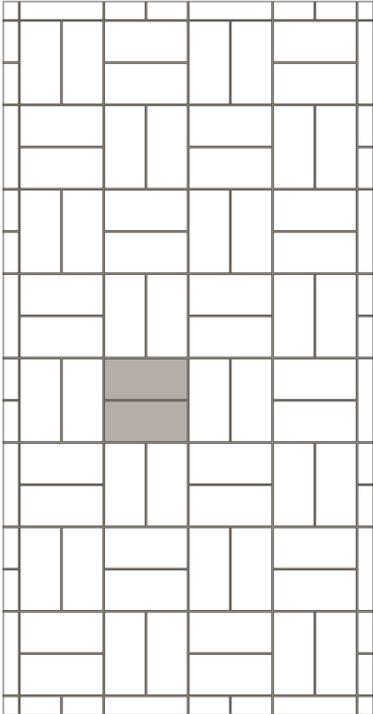

4 x 8

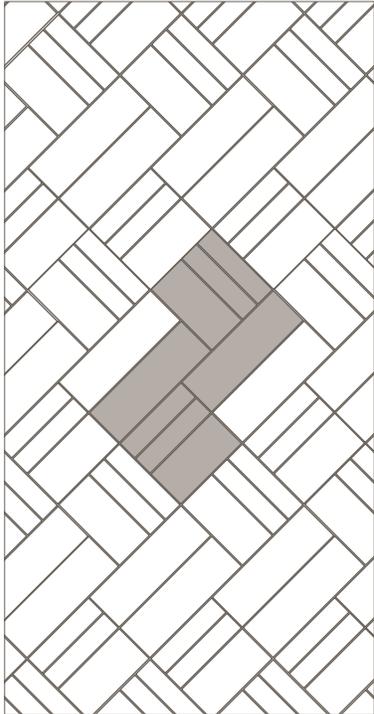

2 x 8 | 4 x 8 | 4 x 12

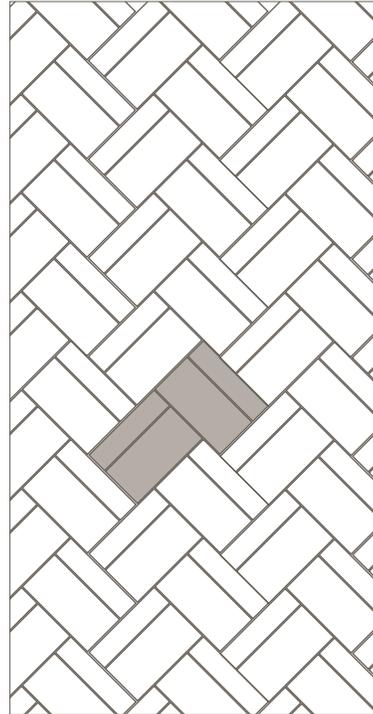

2 x 8 | 4 x 8

LINEAR

COLOR WHEEL™ COLLECTION – GLAZED CERAMIC

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	8 x 24 Wall Tile	(8" x 24") (20.34 cm x 61.03 cm)	3/8" (9.3 mm)	13.30	10
	6 x 18 Wall Tile	(6" x 18") (15.25 cm x 45.76 cm)	3/8" (9.3 mm)	11.25	15
	4 x 16 Wall Tile	(4" x 16") (10.17 cm x 40.68 cm)	3/8" (9.3 mm)	13.20	30
	4 x 12 Wall Tile	(4-1/4" x 12-7/8") (10.91 cm x 32.77 cm)	5/16" (7.9 mm)	10.64	28
	4 x 8 Wall Tile	(4-1/4" x 8-9/16") (10.91 cm x 21.82 cm)	5/16" (7.9 mm)	10.63	42
	2 x 8 Wall Tile	(2-1/8" x 8-9/16") (5.45 cm x 21.82 cm)	5/16" (7.9 mm)	10.40	80

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

TRIM

	Type	Number	Size	Pieces/ Carton
	Jolly	S-1/212J	1/2 x 11-15/16	12
	Wall Bullnose	S-44D9	4 x 16	24
	Wall Bullnose Corner	SN-44D9	4 x 4	20
	Wall Bullnose	S-44C9MOD	4-1/4 x 12-7/8	28
	Wall Bullnose	S-4489MOD	4-1/4 x 8-9/16	42
	Wall Bullnose Corner	SCRL-4449	4-1/4 x 4-1/4	100
	Wall Bullnose	S-4289MOD	2-1/8 x 8-9/16	80
	Wall Bullnose Corner	SN-4289M	2-1/8 x 2-1/8	25
	Flat Top Cove Base	A34C1MOD	4-1/4 x 12-7/8	40

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>6 x 18 & 8 x 24: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)</p> <p>2 x 8, 4 x 12, & 4 x 16: 1/16" (When rectangular size is installed in a staggered brick joint pattern, overlap should not exceed 33%.)</p> <p>4 x 8: 1/16"</p>	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2019 Daltile (1/19)



Photo features Color Wheel™ Linear Arctic White & Plum Crazy 6 x 18 on wall.