



MOSAIC

COLOR WHEEL™ RETRO  
GLAZED CERAMIC

# COLOR WHEEL™ RETRO

GLAZED CERAMIC

## Vivid Nostalgia

Color Wheel™ Retro offers a curated assortment of natural colors from the original Color Wheel™ line and transforms them into unique mosaic patterns. This collection features classic black and white along with organic blues and greens. Arabesque, Harlequin, Chevron and Cube patterns are available in all seven colors in a glossy finish as well as a matte finish featured in black and white. A favorite of artists and designers, Color Wheel™ Retro provides the perfect palette to inspire the imagination.

- COLOR SCHEME
  - Seven colors range from black and white to blues and green
  - Black and white available in both matte and glossy finishes
- EXCLUSIVE FORMATS
  - Offered in geometric Harlequin, Chevron and Cube mosaic patterns
  - And features the softer, rounded Arabesque mosaic shape

Cover photo features Color Wheel™ Retro Peacock arabesque mosaic glossy on the backsplash.

Above photo features Color Wheel™ Retro Matte Black & Matte Arctic White chevron mosaic on the floor, Matte Arctic White chevron mosaic on the side wall and Color Wheel™ Classic Matte Black 6 x 6 and 3 x 6 on the back wall.

### MOSAIC

#### USAGE



### SPECIAL FEATURES

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



2 x 3 Cube Mosaic



2 x 3 Harlequin Mosaic




2 x 3 Chevron Mosaic



3 x 3 Arabesque Mosaic

FINISHES: MATTE | SEMI-GLOSS

SEMI-GLOSS



ARCTIC WHITE 0190 (1)




BLACK K111 (2)



DESERT GRAY X114 (1)



SPA 0148 (3)



WATERFALL 0169 (3)


MATTE



PEACOCK 1102 (3)



GALAXY 1469 (3)




MATTE ARCTIC WHITE 0790 (1)




MATTE BLACK K711 (2)


SIZES




2 x 3 CUBE MOSAIC  
Shown in Waterfall 0169(3)



2 x 3 HARLEQUIN MOSAIC  
Shown in Galaxy 1469(3)



2 x 3 CHEVRON MOSAIC  
Shown in Spa 0148(3)

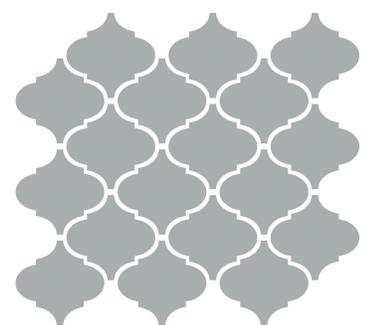

3 x 3 ARABESQUE MOSAIC  
Shown in Desert Gray X114(1)

(1), (2) and (3) indicate price groups. (1) being the least expensive.



SLIP RESISTANT



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT\*  
\*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT [WWW.DAL TILE.COM](http://WWW.DAL TILE.COM) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# COLOR WHEEL™ RETRO

GLAZED CERAMIC

MOSAIC

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	2 x 3 Cube Mosaic* (Dot-mounted)	(12" x 13" Sheet) (30.48 cm x 33.02 cm)	1/4"	8.80	10
	2 x 3 Harlequin Mosaic (Dot-mounted)	(12" x 13" Sheet) (30.48 cm x 33.02 cm)	1/4"	8.80	10
	2 x 3 Chevron Mosaic (Dot-mounted)	(10-1/2" x 13" Sheet) (26.67 cm x 33.02 cm Sheet)	1/4"	8.80	10
	3 x 3 Arabesque Mosaic (Dot-mounted)	(11" x 12" Sheet) (27.94 cm x 30.48 cm Sheet)	1/4"	7.40	10

\* 2 x 3 Cube mosaic requires special installation instructions. Please refer to [daltile.com/product/Color-Wheel-Collection-Retro](http://daltile.com/product/Color-Wheel-Collection-Retro) for more information.

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓**†
Pool Linings	N/A	✓

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

\* Matte mosaic tile only.

† Darker colors may show scratches.

## TRIM

Type	Number	Size	Pieces/ Carton
 12" Jolly	S1/212J	1/2 x 11-15/16	12

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Low (V1)

## PERFORMANCE CHARACTERISTICS

	ASTM#	Semi-Gloss Result	Matte Result
Water Absorption	C373	< 3.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	> 250 lbs
Scratch Hardness	MOHS	4.0 - 6.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## DURABILITY

### Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

**Note:** Matte colors only.

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).



LEARN MORE

7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2022 Daltile (8/22)