



MONOCHROMATIC

COLOR WHEEL™ SPLASH  
GLAZED CERAMIC

 daltile®  
IMAGINE WHAT'S POSSIBLE™

# COLOR WHEEL™ SPLASH

GLAZED CERAMIC

Take a dive into Color Wheel Splash, a curated assortment from the beloved Color Wheel collection, featuring an abrasive finish and two bullnose sizes. Whether enhancing the pool edge or accentuating pool steps, Color Wheel Splash brings a vibrant color accent into the water. Elevate your poolside experience with both style and functionality.



Cover photo features Color Wheel™ Splash Sea Breeze 6 x 6 bullnose on the edge of the pool, Sea Breeze 2 x 6 bullnose on the edge of the steps, Color Wheel™ Mosaics Seabreeze 1 x 3 herringbone mosaic on the pool lining, and Nominee™ Sand, 24 x 24 paver on the floor.

Above photo features Color Wheel™ Splash Cobalt, 6 x 6 bullnose on the edge of the pool, Cobalt 6 x 6 and 2 x 6 bullnose on the pool steps, Calligo™ Nimbus 1 x 6 mosaic on the pool lining and Dignitary™ Superior Taupe, 24 x 24 paver on the floor.

MONOCHROMATIC

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



REVEAL SYNC3D™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



DAL TILE DESIGNS

LOW HIGH

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SPECIAL FEATURES

SIZES:



FINISHES: ABRASIVE | GLOSSY

6 x 6 WALL TILE – ABRASIVE



SEA BREEZE 1174



COBALT DM14



SAPPHIRE SKY DM70




BLACK K111

COORDINATING COLORS

6 x 6 WALL TILE – GLOSSY




SEA BREEZE 1174



COBALT DM14



SAPPHIRE SKY DM70

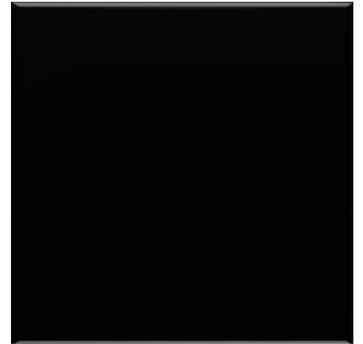

BLACK K111



SLIP RESISTANT\*  
\*Applicable to products with Matte and Textured Finishes



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT\*  
\*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT [WWW.DAL TILE.COM](http://WWW.DAL TILE.COM) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES:



FINISHES: ABRASIVE | GLOSSY

6 x 6 BULLNOSE – GLOSSY



SEA BREEZE 1174



COBALT DM14



SAPPHIRE SKY DM70



BLACK K111

2 x 6 BULLNOSE – GLOSSY



SEA BREEZE 1174



COBALT DM14



SAPPHIRE SKY DM70



BLACK K111

6 x 6 BULLNOSE – ABRASIVE



SEA BREEZE 1174



COBALT DM14



SAPPHIRE SKY DM70



BLACK K111

2 x 6 BULLNOSE – ABRASIVE



SEA BREEZE 1174



COBALT DM14



SAPPHIRE SKY DM70



BLACK K111

# COLOR WHEEL™ SPLASH

GLAZED CERAMIC

MONOCHROMATIC

## SIZES

	Thickness	Sq. Ft./Carton	Pieces/Carton
 6 x 6 (6" x 6") Wall Tile (15.31 cm x 15.31 cm)	5/16" 7.90 mm	12.50	50

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Linear Drain or Standard Center Drain (Residential only)	≥ 0.60	✓*
Exterior Floor Applications, (including pool edges, pool steps & other wet areas with minimal footwear)	≥ 0.60	✓*
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓
Pool Steps	N/A	✓*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

## APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

\* Abrasive finish only.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16"	 Low (V1)

MUNSELL & LRV	Glossy		Abrasive
	MUNSELL	LRV	LRV
SEA BREEZE 1174	5.8PB 3.6/5.6	9.1	11.2
COBALT DM14	9.9PB 2.5/4.4	4.7	5.8
SAPPHIRE SKY DM70	7.6PB 3.2/4.4	7.0	9.4
BLACK K111	10.0B 2.6/0.1	5.0	6.2

 PRE-CONSUMER RECYCLED MATERIALS

## TRIM

Type	Number	Size	Pieces/Carton
 Radius Bullnose	A4200	2 x 6	100
 Radius Bullnose	A3602	6 x 6	44

Available in both glossy and abrasive finish.

## PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120 - 230 lbs
Scratch Hardness	C1895	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## DURABILITY

### Floor Surface Wear Resistance

1 Residential Bathrooms (3)	All Residential / Light Commercial*
2 All Residential Areas	4 All Residential / Commercial

\* Abrasive finish only.

## NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.


Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Abrasive surface is not suitable for use on ramps.

For additional information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).

Special care should be taken when grouting, a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufactures.

## TRIM DIMENSIONS

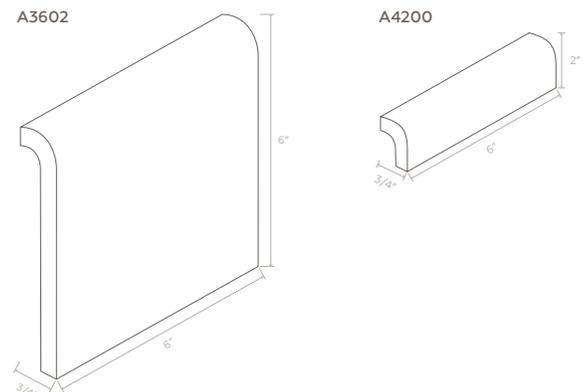

7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



**ZEROTOX**  
Healthy Homes | Healthy Planet

 **daltile**  
IMAGINE WHAT'S POSSIBLE™

©2024 Daltile (8/24)