



STONE LOOK

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC



 **daltile**®
IMAGINE WHAT'S POSSIBLE™

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

Get Inspired by the Natural Beauty of Slate

The intriguing colors and cleft surface of Continental Slate™ are a near perfect recreation of natural slate. Its inspired tones have a high degree of shade variation, so they complement practically any décor.

- EARTHY INSPIRATION
 - Design mimics the natural tones, shading and clefing of slate
 - Durable option to natural slate
- NATURAL DESIGN OPTIONS
 - Offered in modular sizes
 - Available with coordinating mosaic and decorative accents



Cover photo features Continental Slate™ Egyptian Beige 3 x 3 mosaic and Tuscan Blue 12 x 12 in a grid pattern on the floor.

Above photo features Continental Slate™ Tuscan Blue 12 x 12 in a grid pattern on the floor.

STONE LOOK

USAGE



SPECIAL FEATURES


SEE CHARTS FOR FULL PRODUCT DETAILS

SIZES:



FINISHES: MATTE


COLORBODY™ PORCELAIN FLOOR TILE

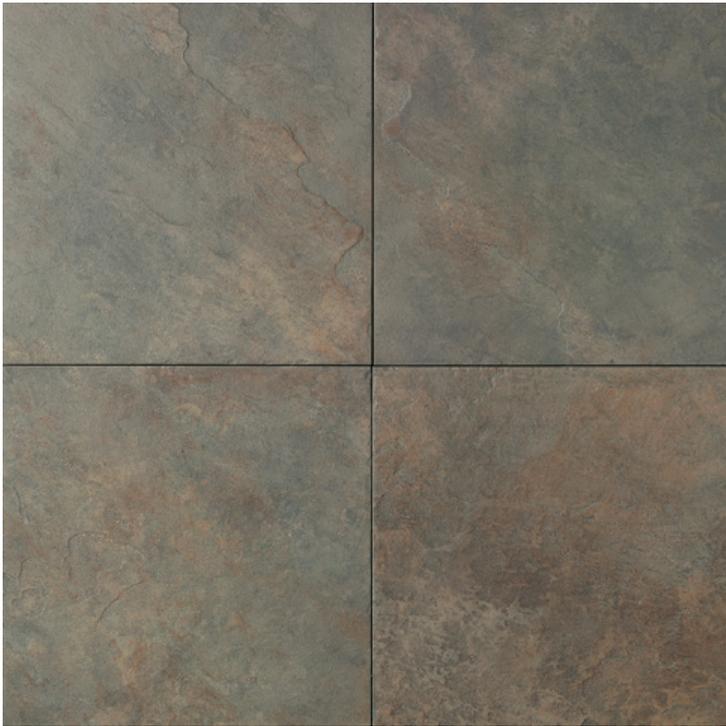

BRAZILIAN GREEN CS52



PERSIAN GOLD CS54 EGYPTIAN BEIGE CS50 TUSCAN BLUE CS56

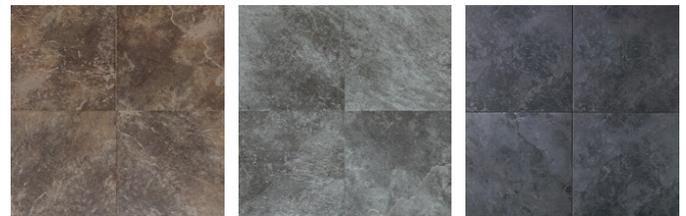

MOROCCAN BROWN CS55 ENGLISH GREY CS57 ASIAN BLACK CS53

3 x 3 GLAZED CERAMIC MOSAIC



PERSIAN GOLD CS54 EGYPTIAN BEIGE CS50 BRAZILIAN GREEN CS52 TUSCAN BLUE CS56 MOROCCAN BROWN CS55 ENGLISH GREY CS57 ASIAN BLACK CS53

DECORATIVE BORDER



CS70 4 x 12 DECORATIVE BORDER Egyptian Beige/Indian Red/Brazilian Green/Asian Black
 CS71 4 x 12 DECORATIVE BORDER Egyptian Beige/Indian Red/Brazilian Green/Asian Black
 CS74 4 x 12 DECORATIVE BORDER Persian Gold/Tuscan Blue/Moroccan Brown
 CS75 4 x 12 DECORATIVE BORDER Persian Gold/Tuscan Blue/English Grey
 CS72 4 x 12 DECORATIVE BORDER Egyptian Beige/Brazilian Green/Asian Black



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

STONE LOOK

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	18 x 18 Floor Tile	(17-3/4" x 17-3/4") (45.20 cm x 45.20 cm)	5/16"	19.77	9
	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	16.72	17
	6 x 6 Floor Tile	(5-13/16" x 5-13/16") (14.70 cm x 14.70 cm)	5/16"	11.80	50
	4 x 12 Decorative Border	(4" x 11-13/16") (10.00 cm x 30.00 cm)	5/16"	N/A	10
	3 x 3 Mosaic (Dot-mounted)	(12" x 24" Sheet) (30.00 cm x 60.00 cm)	1/4"	24.00	12

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES :

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Mosaic tile only

** 6 x 6 floor and mosaic tile only



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.

TRIM

Type	Number	Size	Pieces/ Carton
	S43C9	3 x 12	30
	S36C9T	6 x 12	22
	SC36C9T	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)



Mosaic: 1/8" Approximately

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltille® products and information, visit our website at daltille.com.

