


THE **PLATINUM TIER** OFFERS THE LOOK OF LUXURY, COMBINING MARBLE, WOOD, AND STONE LOOKS FOR A SOPHISTICATED SELECTION THAT OFFERS ENDLESS DESIGN POSSIBILITIES AND EXCEPTIONAL VERSATILITY.

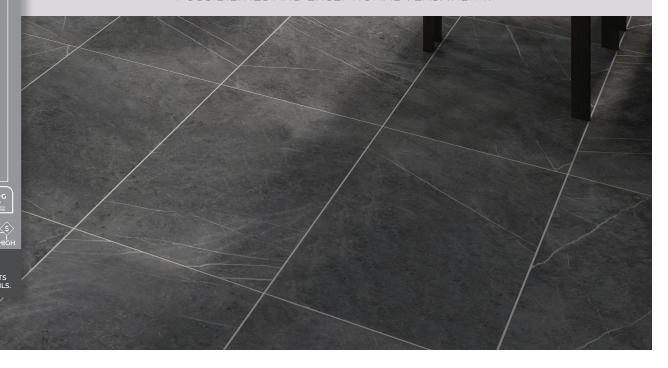

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

STONE LOOK FINISHES: MATTE

FLOOR TILE







WHITE AV17

BEIGE AV18

JUTE SL76

GREY AV19

STONE LOOK FINISHES: MATTE

FLOOR TILE







QUILL SL77

2 x 2 MOSAIC





ALABASTER SL75 JUTE SL76

QUILL SL77

AVAILABLE TILE SIZES





2 x 2 Mosaic

STONE LOOK FINISHES: MATTE

FLOOR TILE









CHALK IT50

2 x 2 MOSAIC

CHALK IT50





AVAILABLE TILE SIZES





CLIFF IT51

CLIFF IT51

SHALE IT52

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

MARBLE LOOK FINISHES: MATTE & GLOSSY

FLOOR TILE



MAGNOLIA CT70



ALMOND CT71



DOVE CT72



CARBON CT73



OYSTER CT74*



CALACATTA SKY CT75**



CALACATTA EMPIRE CT76

2 x 2 MOSAIC




MAGNOLIA CT70




ALMOND CT71



DOVE CT72



CARBON CT73



OYSTER CT74



CALACATTA SKY CT75



CALACATTA EMPIRE CT76















^{*}CT74 available in 12 x 24, 6 x 18, 2 x 2 mosaic only.

^{**}CT75 available in 12x24, 6x18, 4x12, and 2x2 mosaic only.

^{*}Not available in CT73. ** Available in CT75 & CT76 only.

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

MARBLE LOOK FINISHES: MATTE & GLOSSY

FLOOR TILE





MIST PH61



SAND PH62



SMOKE PH63

2 x 2 MOSAIC


CLOUD PH60




CLOUD PH60



MIST PH61



SAND PH62



SMOKE PH63

AVAILABLE TILE SIZES



12 x 24 Wall Tile*



*PH60, PH61 & PH62 only.

WOOD LOOK FINISHES: MATTE

FLOOR TILE



NATURAL HH01



GREIGE HH02



TEAK HH03



DARK BROWN HH04

AVAILABLE TILE SIZES

6 x 36

WOOD LOOK FINISHES: MATTE

FLOOR TILE



NATURAL RB10



BROWN RB11



MEDIUM GRAY RB12



LIGHT GRAY RB13

AVAILABLE TILE SIZES

6 x 24

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

WOOD LOOK FINISHES: MATTE

FLOOR TILE



WHITE VL50



BROWN VL51



DARK BROWN VL52



GRAY VL53

AVAILABLE TILE SIZES

6 x 24 Floor Tile

WOOD LOOK FINISHES: MATTE

FLOOR TILE



WHITE VC01



NATURAL VC02



HONEY VC03



BROWN VC04



GRAY BROWN VC05



6 x 36 Floor Tile

WOOD LOOK FINISHES: MATTE

FLOOR TILE



LOFT TH10



AVENUE TH11



VINTAGE TH12



CAVALRY TH13

AVAILABLE TILE SIZES

8 x 48 Floor Tile

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

CONCRETE LOOK

CONCRETE LOOK FINISHES: MATTE

FLOOR TILE





WHITE UB02

GREY UB04

2 x 2 MOSAIC





WHITE UB02

GREY UB04

AVAILABLE TILE SIZES





CORE FUNDAMENTALS™ - PLATINUM

AVAILABLE SIZE & TRIM SHAPES

PLATINUM

PLEASE REFER TO CHART ON NEXT PAGE FOR AVAILABILITY BASED ON COLOR CODE

FLOOR	SIZES		THICKNESS
	15 x 30 Floor Tile	15-3/8" x 30-1/2" (39.15 cm x 77.60 cm)	5/16"
	24 x 24 Floor Tile	23-13/16" x 23-13/16" (60.48 cm x 60.48 cm)	5/16"
	12 x 24 Floor Tile	11-7/8" x 23-5/8" (30.23 cm x 60.12 cm)	5/16"
	12 x 12 Floor Tile	11-13/16" x 11-13/16" (30.00 cm x 30.00 cm)	5/16"
	8 x 48 Floor Tile	7-15/16" x 47-3/16" (20.26 cm x 120.00 cm)	3/8"
	6 x 36 Floor Tile	5-15/16" x 35-7/16" (15.19 cm x 90.00)	5/16"
	6 x 24 Floor Tile	6-1/16" x 23-7/8" (15.43 cm x 60.60 cm)	5/16"
WALL	SIZES		THICKNESS
	4 x 12 Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"
	6 x 18 Wall Tile	6" x 18" (15.25 cm x 45.77 cm)	5/16"
	12 x 24 Wall Tile	12" x 24" (30.51 cm x 61.03 cm)	3/8"

MOSAICS	SIZES	THICKNESS		
	2 x 2 Mosaic Dot-mounted	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet) 1/4"		
FLOOR TRIN	Ч			
	P43C9	3 x 12 Floor Bullnose		
	P439B	3 x 15 Floor Bullnose		
	P43F9	3 x 24 Floor Bullnose		
WALLTRIM				
	S1/212J	12" Jolly		

AVAILABLE SIZE & TRIM SHAPES

PLATINUM

COLOR			
# NAME # 15 x 30 24 x 24 12 x 24 12 x 12 8 x 48 6 x 36 6 x 24 P439B P43C9 P43F9 Glossy Glossy AV17 White 21		JOLLY	MOSAIC
AV18 Beige 21 •	4 x 12 Matte	S1/212J	2 x 2
AV19 Grey 21			
CT70 Magnolia 22 • • • • • • • • • • • • • • • • • • •			
CT71 Almond 22 •			
CT72 Dove 22 • • • •		•	•
		•	•
CT77 Contrar 22		•	•
CT73 Carbon 22 • • • • •			•
CT74 Oyster 22 • • • • • •		•	•
CT75 Calacatta Sky 22 • • • •	•	•	•
CT76 Calacatta Empire 22	•	•	•
HH01 Natural 23			
HH02 Greige 23 ●			
HH03 Teak 23			
HH04 Dark Brown 23			
IT50 Chalk 21 ● ●			•
IT51			•
IT52 Shale 21 ● ●			•
PH60 Cloud 23 • • • •		•	•
PH61 Mist 23 • • • • • •		•	•
PH62 Sand 23 • • • • • •		•	•
PH63 Smoke 23 •			•
RB10 Natural 23			
RB11 Brown 23 ●			
RB12 Medium Gray 23			
RB13 Light Gray 23			
SL75 Alabaster 21 •			•
SL76 Jute 21 •			•
SL77 Quill 21 •			•
TH10 Loft 24			
TH11 Avenue 24			
TH12 Vintage 24			
TH13 Cavalry 24			
UB02 White 25 • • • • • • • • • • • • • • • • • •			•
UB04 Grey 25 • •			•
VL50 White 24			
VL51 Brown 24			
VL52 Dark Brown 24 • • • • • • • • • • • • • • • • • •			
VL53 Gray 24			
VC01 White 24			+
VC02 Natural 24 • • • • • • • • • • • • • • • • • •			
VC03 Honey 24			
VC04 Brown 24			
VC05 Gray Brown 24			

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

PLATINUM: AV17, AV18, AV19 | HH01, HH02, HH03, HH04 | RB10, RB11, RB12, RB13 | TH10, TH11, TH12, TH13 | VL50, VL51, VL52, VL53 | VC01, VC02, VC03, VC04, VC05

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floor – Standard Center Drain	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Flo	oor Surface Wear Resista	ınce	
1 Residential Bathrooms		3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

PLATINUM: CT70, CT71, CT72, CT73, CT74, CT75, CT76 | PH60, PH61, PH62, PH63 | UB02, UB04 | | SL75, SL76, SL77 | IT50, IT51, IT52 |

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	/ **
Wet & Level – Interior Floor	≥ 0.42	/ **
Shower Floor – Standard Center Drain	≥ 0.42	/ *
Shower Floor – Linear Drain	≥ 0.42	/ *
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	/ **
Pool Linings	N/A	√ *

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

** Wall tile not suitable for this application

* Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	Medium (V2) PH60, PH61, PH62 & PH63
Wall: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.) Mosaic: 1/8"	High (√3) CT70, CT71, CT72, CT73, CT74, CT75, CT76, UB02 & UB04, ITS0, ITS1, ITS2, SL75, SL76 & SL77

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbf	120-230 lbf	> 250 lbf
Scratch Hardness	C1895	8.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

Residential Bathrooms All Residential / Light Commercial 3

2 All Residential Areas (4) All Residential / Commercial

