


THE **PLATINUM TIER** OFFERS THE LOOK OF LUXURY, COMBINING MARBLE, WOOD, AND STONE LOOKS FOR A SOPHISTICATED SELECTION THAT OFFERS ENDLESS DESIGN POSSIBILITIES AND EXCEPTIONAL VERSATILITY.

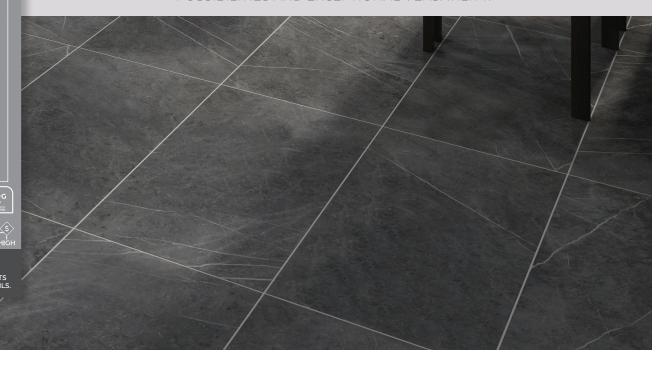

## GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

STONE LOOK FINISHES: MATTE

#### FLOOR TILE





AVAILABLE TILE SIZES 12 x 24 Floor Tile

WHITE AV17

BEIGE AV18

JUTE SL76

**GREY AV19** 

STONE LOOK FINISHES: MATTE

FLOOR TILE







**QUILL SL77** 

ALABASTER SL75

2 x 2 MOSAIC







QUILL SL77 JUTE SL76

**AVAILABLE TILE SIZES** 





STONE LOOK FINISHES: MATTE

FLOOR TILE

CHALK IT50







CHALK IT50 CLIFF IT51 2 x 2 MOSAIC





AVAILABLE TILE SIZES





CHALK IT52

## GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

MARBLE LOOK FINISHES: MATTE & GLOSSY

#### FLOOR TILE



MAGNOLIA CT70



ALMOND CT71



**DOVE CT72** 



**CARBON CT73** 



OYSTER CT74\*



CALACATTA SKY CT75



CALACATTA EMPIRE CT76

#### 2 x 2 MOSAIC




MAGNOLIA CT70



ALMOND CT71



DOVE CT72



CARBON CT73



OYSTER CT74



CALACATTA SKY CT75\*\*



CALACATTA EMPIRE CT76





12 x 24 Floor Tile

12 x 12 Floor Tile

6 x 18 Wall Tile\*

4 x 12 Wall Tile

2 x 2 Mosaic

<sup>\*</sup>CT74 available in 12  $\times$  24, 6  $\times$  18, 2  $\times$  2 mosaic only.

<sup>\*</sup>Not available in CT73.

<sup>\*\*</sup>Not available in 12 x 12.

## GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

MARBLE LOOK FINISHES: MATTE & GLOSSY

#### FLOOR TILE





MIST PH61



SAND PH62



SMOKE PH63

2 x 2 MOSAIC


CLOUD PH60




CLOUD PH60



MIST PH61



SAND PH62



SMOKE PH63

#### **AVAILABLE TILE SIZES**



12 x 24 Wall Tile\*



\*PH60, PH61 & PH62 only.

WOOD LOOK FINISHES: MATTE

FLOOR TILE



NATURAL HH01



**GREIGE HH02** 



TEAK HH03



DARK BROWN HH04

**AVAILABLE TILE SIZES** 

6 x 36

WOOD LOOK FINISHES: MATTE

FLOOR TILE



NATURAL RB10



**BROWN RB11** 



MEDIUM GRAY RB12



LIGHT GRAY RB13

AVAILABLE TILE SIZES

6 x 24

## GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

WOOD LOOK FINISHES: MATTE

FLOOR TILE



WHITE VL50



**BROWN VL51** 



DARK BROWN VL52



**GRAY VL53** 

**AVAILABLE TILE SIZES** 

6 x 24 Floor Tile

WOOD LOOK FINISHES: MATTE

FLOOR TILE



WHITE VC01



NATURAL VC02



HONEY VC03



**BROWN VC04** 



**GRAY BROWN VC05** 



6 x 36 Floor Tile

WOOD LOOK FINISHES: MATTE

FLOOR TILE



LOFT TH10



AVENUE TH11



VINTAGE TH12



CAVALRY TH13

**AVAILABLE TILE SIZES** 

8 x 48 Floor Tile

## GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

CONCRETE LOOK

CONCRETE LOOK FINISHES: MATTE

## FLOOR TILE





WHITE UB02

**GREY UB04** 

## 2 x 2 MOSAIC





WHITE UB02

**GREY UB04** 

AVAILABLE TILE SIZES





# CORE FUNDAMENTALS™ - PLATINUM

AVAILABLE SIZE & TRIM SHAPES

## PLATINUM

PLEASE REFER TO CHART ON NEXT PAGE FOR AVAILABILITY BASED ON COLOR CODE

FLOOR	SIZES		THICKNESS
	15 x 30 Floor Tile	15-3/8" x 30-1/2" (39.15 cm x 77.60 cm)	5/16"
	24 x 24 Floor Tile	23-13/16" x 23-13/16" (60.48 cm x 60.48 cm)	5/16"
	12 x 24 Floor Tile	11-7/8" x 23-5/8" (30.23 cm x 60.12 cm)	5/16"
	12 x 12 Floor Tile	11-13/16" x 11-13/16" (30.00 cm x 30.00 cm)	5/16"
	8 x 48 Floor Tile	7-15/16" x 47-3/16" (20.26 cm x 120.00 cm)	3/8"
	6 x 36 Floor Tile	5-15/16" x 35-7/16" (15.19 cm x 90.00)	5/16"
	6 x 24 Floor Tile	6-1/16" x 23-7/8" (15.43 cm x 60.60 cm)	5/16"
WALL	SIZES		THICKNESS
	4 x 12 Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"
	6 x 18 Wall Tile	6" x 18" (15.25 cm x 45.77 cm)	5/16"
	12 x 24 Wall Tile	12" x 24" (30.51 cm x 61.03 cm)	3/8"

MOSAICS	SIZES	THICKNESS		
	2 x 2 Mosaic Dot-mounted	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet) 1/4"		
FLOOR TRIN	Ч			
	P43C9	3 x 12 Floor Bullnose		
	P439B	3 x 15 Floor Bullnose		
	P43F9	3 x 24 Floor Bullnose		
WALLTRIM				
	S1/212J	12" Jolly		

# AVAILABLE SIZE & TRIM SHAPES

# PLATINUM

COLOR			4
# NAME # 15 x 30 24 x 24 12 x 24 12 x 12 8 x 48 6 x 36 6 x 24 P439B P43C9 P43F9 Glossy Glossy  AV17 White 21		JOLLY	MOSAIC
AV18       Beige       21       •	4 x 12 Matte	S1/212J	2 x 2
AV19 Grey 21			
CT70         Magnolia         22         • • • • • • • • • • • • • • • • • • •			
CT71         Almond         22         •			
CT72 Dove 22 • • • •		•	•
		•	•
CT77 Contrar 22		•	•
CT73   Carbon   22     •   •   •   •   •			•
CT74 Oyster 22 • • • • • •		•	•
CT75 Calacatta Sky 22 • • • •	•	•	•
CT76 Calacatta Empire 22	•	•	•
HH01 Natural 23			
HH02 Greige 23 ●			
HH03 Teak 23			
HH04 Dark Brown 23			
IT50   Chalk   21   ●       ●			•
IT51			•
IT52   Shale   21   ●       ●			•
PH60 Cloud 23 • • • •		•	•
PH61 Mist 23 • • • • • •		•	•
PH62 Sand 23 • • • • • •		•	•
PH63 Smoke 23 •			•
RB10 Natural 23			
RB11 Brown 23 ●			
RB12 Medium Gray 23			
RB13 Light Gray 23			
SL75 Alabaster 21 •			•
SL76 Jute 21 •			•
SL77 Quill 21 •			•
TH10 Loft 24			
TH11 Avenue 24			
TH12 Vintage 24			
TH13 Cavalry 24			
UB02 White 25 • • • • • • • • • • • • • • • • • •			•
UB04 Grey 25 • •			•
VL50 White 24			
VL51 Brown 24			
VL52   Dark Brown   24   • • • • • • • • • • • • • • • • • •			
VL53 Gray 24			
VC01 White 24			+
VC02   Natural   24   • • • • • • • • • • • • • • • • • •			
VC03 Honey 24			
VC04 Brown 24			
VC05 Gray Brown 24			

## GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

PLATINUM: AV17, AV18, AV19 | HH01, HH02, HH03, HH04 | RB10, RB11, RB12, RB13 | TH10, TH11, TH12, TH13 | VL50, VL51, VL52, VL53 | VC01, VC02, VC03, VC04, VC05

## **APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	<b>✓</b>
Wet & Level – Interior Floor	≥ 0.42	<b>✓</b>
Shower Floor – Standard Center Drain	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	<b>~</b>
Countertops	N/A	<b>~</b>
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

## APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	High (V3)

## PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

#### **DURABILITY**

Flo	oor Surface Wear Resista	nce	
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	(4)	All Residential / Commercial

PLATINUM: CT70, CT71, CT72, CT73, CT74, CT75, CT76 | PH60, PH61, PH62, PH63 | UB02, UB04 | | SL75, SL76, SL77 | IT50, IT51, IT52 |

## **APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	<b>√</b> **
Wet & Level – Interior Floor	≥ 0.42	<b>√</b> **
Shower Floor – Standard Center Drain	≥ 0.42	<b>√</b> *
Shower Floor – Linear Drain	≥ 0.42	<b>√</b> *
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	<b>✓</b>
Countertops	N/A	<b>/</b> **
Pool Linings	N/A	<b>/</b> *

A DCOF value of  $\geq$ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{\text{\tiny T}}$ , visit daltile.com/DCOF.

## APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

- \*\* Wall tile not suitable for this application
- \* Mosaic tile only

## INSTALLATION

Grout Joint Recommendation	Shade Variation		
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	Medium (V2) PH60, PH61, PH62 & PH63		
Wall: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)  Mosaic: 1/8"	High (V3) C170, C171, C172, C173, C174, C175, C176, UB02 & UB04, IT50, IT51, IT52, SL75, SL76 & SL77		

## PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbf	120-230 lbf	> 250 lbf
Scratch Hardness	C1895	8.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

## DURABILITY

гι	oor Surrace Wear Resista	ınce	,		
1	Residential Bathrooms	3	All Residential / Light Commercial		
2	All Posidontial Areas		All Posidontial / Commercial		