



STONE LOOK

DIPLOMACY™

STONE ATTACHE™ COLLECTION - COLORBODY™ PORCELAIN

 daltile®
IMAGINE WHAT'S POSSIBLE™

DIPLOMACY™

STONE ATTACHE™ COLLECTION - COLORBODY™ PORCELAIN

Bluestone Allure

Diplomacy deftly delivers the quiet strength and visual beauty of quarried Belgian bluestone. Diplomacy is available in three smoky hues that come alive with movement created by delicate highlights of light greys and whites. Large format floor tiles paired with a coordinating brick-joint mosaic create a magnificent space crowned by an authentic stone look.

STONE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



REVEAL
SYNC3D™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



P.C.



LOW HIGH

SPECIAL FEATURES

NOT APPLICABLE
TO ALL PRODUCTS
WITHIN THE SERIES.
SEE CHARTS FOR FULL
PRODUCT DETAILS



Cover photo features Dark Grey 24 x 24 on the floor.

Above photo features Dark Grey brick-joint mosaic on the wall.

STONE LOOK

DIPLOMACY™

STONE ATTACHE™ COLLECTION - COLORBODY™ PORCELAIN

SIZES:



24 x 48
Floor Tile



20 x 40
Paver Tile



24 x 24
Floor Tile




12 x 24
Floor Tile




5/8 x 1 Brick-joint
Mosaic Tile

FINISHES: MATTE | TEXTURED

FLOOR TILE

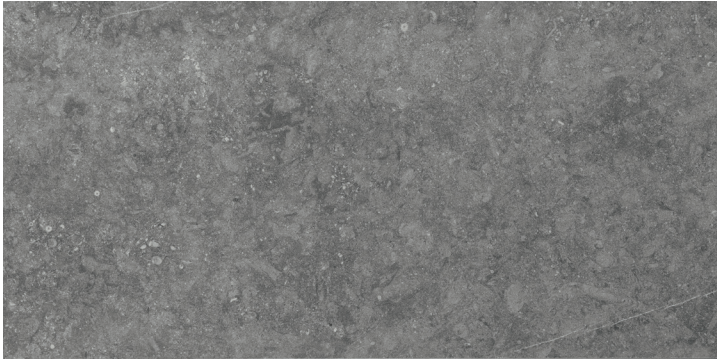

LIGHT GREY DP01

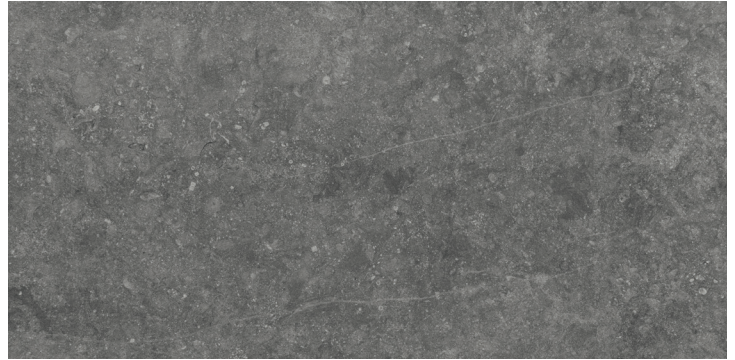


MEDIUM GREY DP02




DARK GREY DP03


BRICK-JOINT MOSAIC TILE

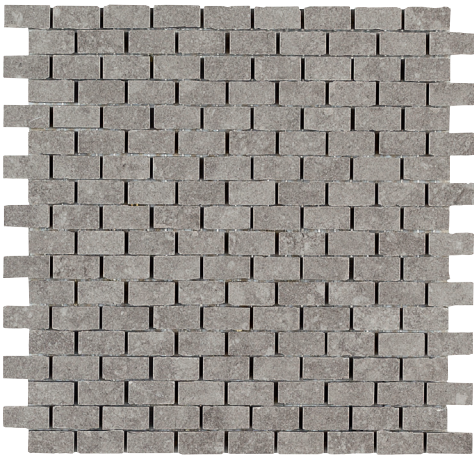

LIGHT GREY DP01

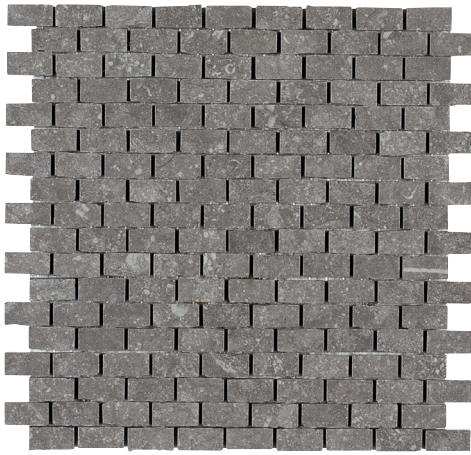

MEDIUM GREY DP02

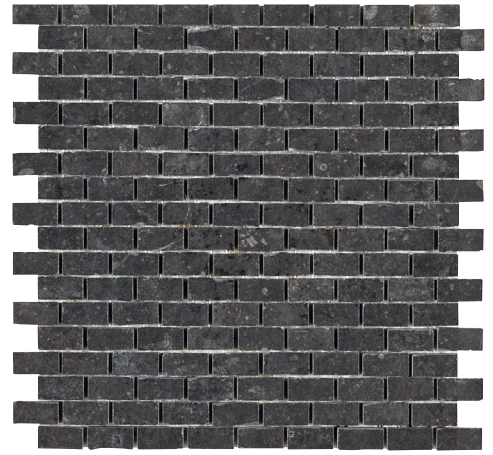

DARK GREY DP03



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT
*Not Applicable to Mesh-Mounted
Mosaics













INDOOR/OUTDOOR




SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES					
			Thickness	Finish	Made in U.S.A.
	24 x 48 Floor Tile	23-7/16" x 47" (59.50 cm x 119.30 cm)	3/8"	M	
	20 x 40 Paver Tile	19-1/2" x 39-3/16" (49.50 cm x 99.50 cm)	13/16"	T	
	24 x 24 Floor Tile	23-7/16" x 23-7/16" (59.50 cm x 59.50 cm)	3/8"	M	
	12 x 24 Floor Tile	11-11/16" x 23-7/16" (29.65 cm x 59.50 cm)	3/8"	M	
	5/8 x 1 Brick-joint Mosaic Tile (Mesh-mounted)	11-11/16" x 11-11/16" Sheet (29.65 cm x 29.65 cm Sheet)	3/8"	M	
M Matte Finish T Textured Finish					

TRIM				
Type	Number	Size	Finish	
 Bullnose	S43F9	3 x 24	M	
M Matte Finish				
Floor bullnose trim is intended to coordinate with floor tile in the standard 90-degree installation position.				

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/ or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).	 Medium (V2)
Mosaic Tile: 1/8"	

APPLICATIONS		
	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors – Standard Center Drain	≥ 0.42	✓*
Shower Floors – Linear Drain	≥ 0.42 (Mosaic)	✓*
	≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓*
A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF .		

PERFORMANCE CHARACTERISTICS			
	ASTM#	Floor/Mosaic Result	Paver Results
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 300 lbf	N/A
	C1505	N/A	≥ 2,000 lbf
Scratch Hardness	C1895	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
For additional information on test results, visit us at: daltille.com/information/TestResults .			
DURABILITY			
Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial
NOTES			

APPLICATION NOTES:	
Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.	
* Mosaic tile only.	
** Paver tile only.	

PERFORMANCE CHARACTERISTICS			
	ASTM#	Floor/Mosaic Result	Paver Results
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 300 lbf	N/A
	C1505	N/A	≥ 2,000 lbf
Scratch Hardness	C1895	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
For additional information on test results, visit us at: daltille.com/information/TestResults .			

DURABILITY			
Floor Surface Wear Resistance			
1 Residential Bathrooms	3	All Residential / Light Commercial	
2 All Residential Areas	④	All Residential / Commercial	

NOTES	
Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.	
Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.	
For additional information refer to "Factors to Consider" at: daltille.com/Factors .	
To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.	
Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.	
Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.	



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltille® products and information, visit our website at daltille.com.

