



MARBLE LOOK

PROTECTION THAT LIVES ON 
DIVINIUM™ + MICROBAN®
GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC WALL TILE & MOSAICS

 **daltile®**
IMAGINE WHAT'S POSSIBLE™

DIVINIUM™ + MICROBAN®

PROTECTION THAT LIVES ON



GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC WALL TILE & MOSAICS

When luxury is a design essential, choose Divinium, a decadent porcelain floor tile and ceramic wall & mosaic collection. Select from an assortment of sizes: Featuring the 3D 8" Hex, 6 x 18, 3 x 12 picket, 1 x 6 mosaic and the basketweave mosaic. Customize your design with the confidence of DEFEND™, powered by Microban®, which eliminates 99% of the bacteria on the tile's surface, 24/7.



Cover photo features Divinium™ Calypso™ 8" 3D Hexagon on the left wall and Wanderwise™ Swan 12 x 24 on the floor.

Above photo features Divinium™ Zion 3 x 12 Picket on the front of the bar and Panoramic Porcelain Surfaces™ Elemental Selection Jasper Grey on the countertop and floor.

MARBLE LOOK

USAGE



SPECIAL FEATURES


NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



FINISHES: MATTE | GLOSSY


8" 3D HEXAGON FLOOR TILE

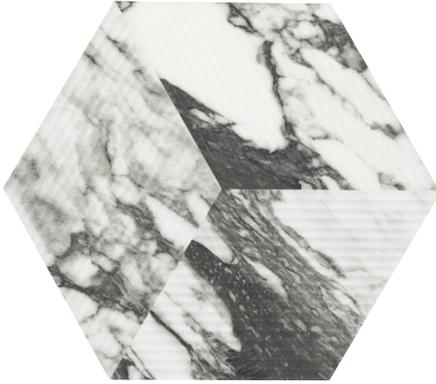

CALYPSO DV05



NOVA DV06

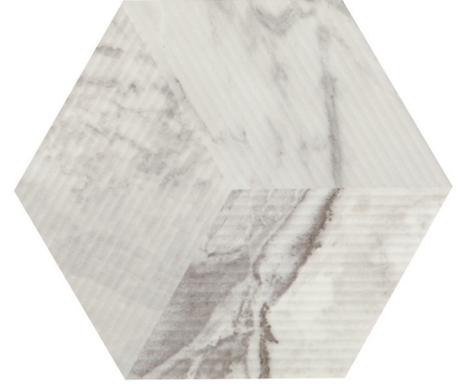

ZION DV07

6 x 18 WALL TILE



CALYPSO DV05



NOVA DV06



ZION DV07

3 x 12 WALL TILE



CALYPSO DV05



NOVA DV06



ZION DV07

3 x 12 PICKET WALL TILE



CALYPSO DV05



NOVA DV06



ZION DV07

1 x 6 MOSAIC TILE



CALYPSO DV05




NOVA DV06



ZION DV07


BASKETWEAVE MOSAIC



CALYPSO DV05



NOVA DV06



ZION DV07

JOLLY



CALYPSO DV05



NOVA DV06



ZION DV07



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	6 x 18 Wall Tile	(6" x 18") (15.25 cm x 45.77 cm)	5/16"	11.28	15
	3 x 12 Wall Tile	(3" x 12") (7.65 cm x 30.71 cm)	5/16"	12.14	48
	3 x 12 Picket Wall Tile	(3" x 12") (7.65 cm x 30.71 cm)	5/16"	8.88	40
	3" 3D Hex Floor Tile	(7-7/8" x 9-1/16") (20.04 cm x 23.16 cm)	5/16"	9.37	25
	1 x 6 Mosaic (Dot-mounted)	(9-3/4" x 11-1/2") (24.76 cm x 29.21 cm Sheet)	5/16"	8.30	10
	Basketweave Mosaic (Dot-mounted)	(13-1/8" x 13-1/8" Sheet) (33.34 cm x 33.34 cm Sheet)	1/4"	10	10

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓**
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications, including patios, pool decking & other wet areas with minimal footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓**
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Wall and mosaic tile are suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Floor and Mosaic tile only.

** Mosaic tile only.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.

TRIM

Type	Number	Size	Pieces/ Carton
 Jolly*	S1/212J	1/2 x 12	12

* Microban® applies to Floor, Wall and Mosaic Tile only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)

3 x 12 Wall Tile: 1/16"

6 x 18 Wall Tile: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%)



Mosaic: 1/8"

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbs	120 - 230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0 - 6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.