



CONCRETE LOOK

FIXTURE™
COLORBODY™ PORCELAIN FLOOR



daltile®
IMAGINE WHAT'S POSSIBLE™

FIXTURE™

COLORBODY™ PORCELAIN FLOOR

Form and function meet to create the sophisticated ColorBody™ porcelain tile, Fixture. This sleek, concrete look tile is engineered for optimal durability, adding contemporary design to high-traffic spaces and lasting style to floor and wall applications. Available in five natural colors in polished and matte finishes, this impressive tile ranks high for strength and beauty.

CONCRETE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



PC
POLYURETHANE
PORCELAIN



LOW HIGH

SPECIAL FEATURES



Cover photo features Fixture™ Fog, 24 x 24 matte on the floor and Bee Hive™ Cool Target 24 x 20 Hexagon matte on the center floor strip.
Above photo features Fixture™ Glacier, 24 x 24 matte on the floor and Miramo™ Reef, 1 x 6 mosaic around the counter.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



24 x 48
Floor Tile




24 x 24
Floor Tile



12 x 24
Floor Tile

FINISHES: POLISHED | MATTE | TEXTURED

FLOOR TILE

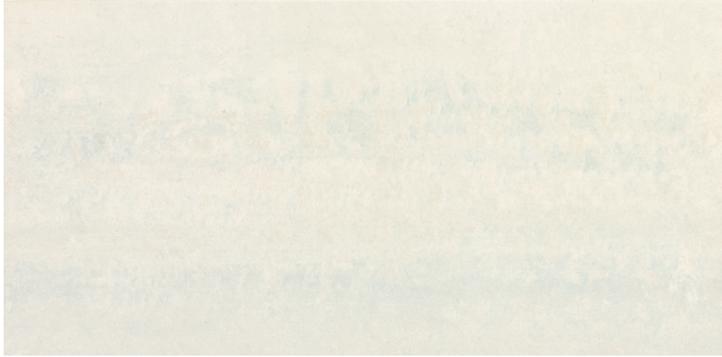

ICE FX20



GLACIER FX21



SOIL FX22



FOG FX23



COAL FX24



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

FIXTURE™

COLORBODY™ PORCELAIN FLOOR

CONCRETE LOOK

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-1/4" x 46-11/16") (59.2 cm x 118.6 cm)	5/16"	15.12	2
	24 x 24 Floor Tile*	(23-1/4" x 23-1/4") (59.20 cm x 59.20 cm)	5/16"	15.09	4
	12 x 24 Wall Tile*	(11-9/16" x 23-1/4") (29.50 cm x 59.20 cm)	5/16"	15.04	8

* 12 x 24 and 24 x 24 are available in a Textured finish via made-to-order program.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES :

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Matte finish only.

** Texture finish only.

TRIM

	Type	Number	Size	Pieces/ Carton
	Bullnose	S43F9	3 x 24	10
	Cove Base†	S36C9T	6 x 12	22
	Cove Base Outcorner†	SC36C9T	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

† Available in Matte finish only.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

INSTALLATION

Grout Joint Recommendation

1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).

 Medium (V2)

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

