



METALLIC LOOK

FLOOR | WALL

GEOMETRIC FUSION™

COLORBODY™ PORCELAIN



 daltile®
IMAGINE WHAT'S POSSIBLE™

FLOOR | WALL

GEOMETRIC FUSION™

COLORBODY™ PORCELAIN

Geometry, Deconstructed

Welcome the glamorous world of metallics with Geometric Fusion™. This chic collection offers nine patterns designed to be installed randomly, which creates an intentional deconstructed geometric look. Each tile features a decorative blend of metallic, matte and glossy finishes enhanced by EverLux™ Sync technology. Geometric Fusion's four popular metallic colors are perfect for adding excitement to a monochromatic space..

• DAZZLING METALLICS

- Features a geometric blend of metallic, matte and glossy finishes synchronized through EverLux™ Sync technology with subtle textures
- Stunning black and brilliant white designs as well as metallic bronze and silver hues

• STYLISH INSTALLATION

- Offered in nine 8 x 8 geometric patterns, this ColorBody™ porcelain tile is designed to be installed on floors and walls in a random, non-contiguous arrangement
- Boldly delivers visual interest to minimalistic, monochromatic spaces
- TruEdge™ delivers a seamless installation with smaller grout joints



METALLIC LOOK

USAGE



SPECIAL FEATURES

LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

Cover and above photos feature Geometric Fusion™ Graphite 8 x 8 on the wall.

METALLIC LOOK

FLOOR | WALL
GEOMETRIC FUSION™
COLORBODY™ PORCELAIN

SIZES:


8 x 8
Floor Tile

FINISHES: MATTE | GLOSSY


FLOOR TILE



PEARL GF01

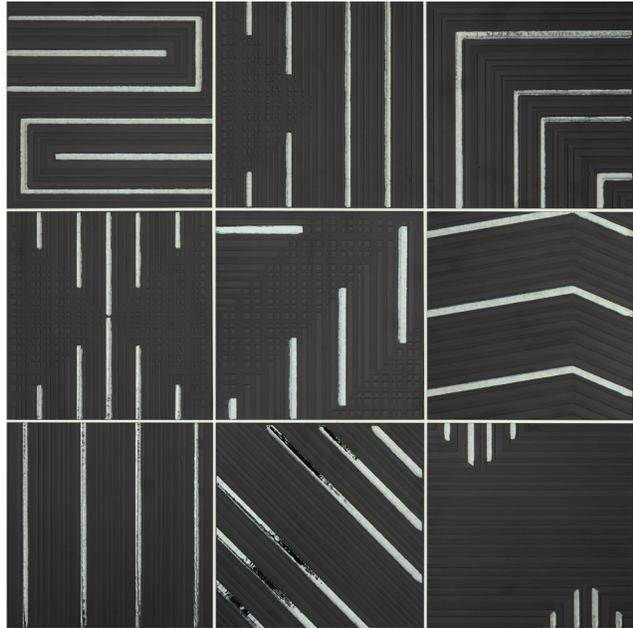

OBSIDIAN GF02

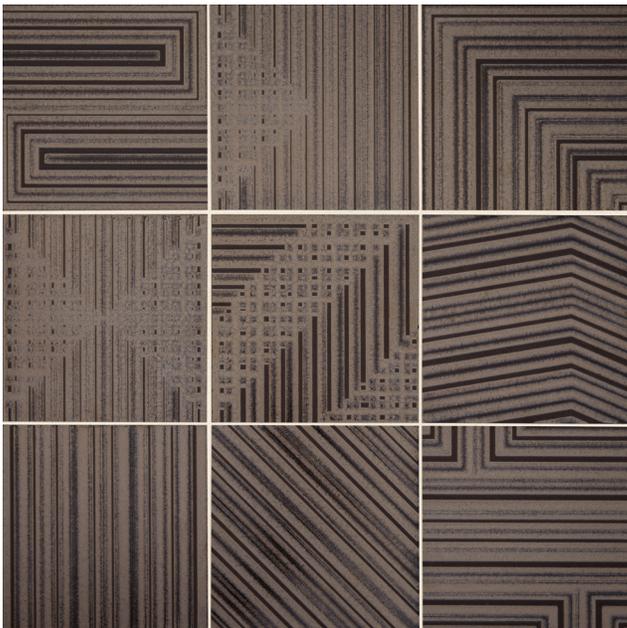

AMBER GF04



GRAPHITE GF03



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*

*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*

*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

GEOMETRIC FUSION™

COLORBODY™ PORCELAIN

METALLIC LOOK

SIZES

| | | | Thickness | Sq. Ft./ Carton | Pieces/ Carton |
|--|---------------------|--|-----------|--------------------|-------------------|
|  | 8 x 8 Floor Tile | (7-3/4" x 7-3/4") (19.65 cm x 19.65 cm) | 3/8" | N/A | 9 |

Product is available only in pre-boxed sets of nine patterns. Individual patterns are not sold separately.

APPLICATIONS

| | Target DCOF wet | Suitable |
|--|--------------------|----------|
| Dry & Level – Interior Floor | N/A | ✓ |
| Wet & Level – Interior Floor | ≥ 0.42 | ✓ |
| Shower Floors (Residential or Light Commercial) | ≥ 0.42 | |
| Exterior Floor Applications (including pool decking & other wet areas with minimal footwear) | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | ✓ |
| Countertops | N/A | |
| Pool Linings | N/A | |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|----------------------------|---|
| Floor: 1/8" |  Medium (V2) |

PERFORMANCE CHARACTERISTICS

| | ASTM# | Result |
|---------------------|-------|-----------|
| Water Absorption | C373 | < 0.5% |
| Breaking Strength | C648 | > 275 lbs |
| Scratch Hardness | MOHS | 8.0 |
| Chemical Resistance | C650 | Resistant |

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

| | |
|-----------------------------|------------------------------------|
| 1 Residential Bathrooms (3) | All Residential / Light Commercial |
| 2 All Residential Areas | 4 All Residential / Commercial |

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A1371 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

PRE-CONSUMER RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.