



CONCRETE LOOK

INDOTERRA™

COLORBODY™ PORCELAIN FLOOR & MOSAIC TILE WITH
STEPWISE™ TECHNOLOGY AND GLAZED PORCELAIN FLOOR TILE

INDOTERRA™

COLORBODY™ PORCELAIN FLOOR & MOSAIC TILE WITH STEPWISE™ TECHNOLOGY AND GLAZED PORCELAIN FLOOR TILE

Transform your surroundings into a haven of tranquility with ColorBody™ and glazed porcelain tile, Indoterra. A concrete-look canvas of neutral tones, Indoterra centers a minimalistic design with large formats, dimensional surfaces and StepWise™ technology for an immersive experience indoors and outdoors. Choose the timeless allure of the 2 x 9 brick with the choice of a fluted or flat surface, or the subtle sophistication of the 12 x 24 Woven floor tile and Circle mosaic. Indoterra invites you to play with textures and shapes in a color palette that will stand the test of time.

CONCRETE LOOK

USAGE



SPECIAL FEATURES



Cover photo features Indoterra™ White, Desert, 24 x 48 on the floor, Brick, 2 x 9 Fluted on the island and ONE Quartz Surfaces® Valor Gold on the countertop.

Above photo features Indoterra™ Natural, 12 x 24 Woven on the wall and Natural, 6 x 24 on the floor

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

INDOTERRA™

COLORBODY™ PORCELAIN FLOOR & MOSAIC TILE WITH STEPWISE™ TECHNOLOGY AND GLAZED PORCELAIN FLOOR TILE

CONCRETE LOOK

SIZES:




FINISHES: MATTE

COLOR PALETTE



FLOOR TILE - COLORBODY™ PORCELAIN WITH STEPWISE™ TECHNOLOGY

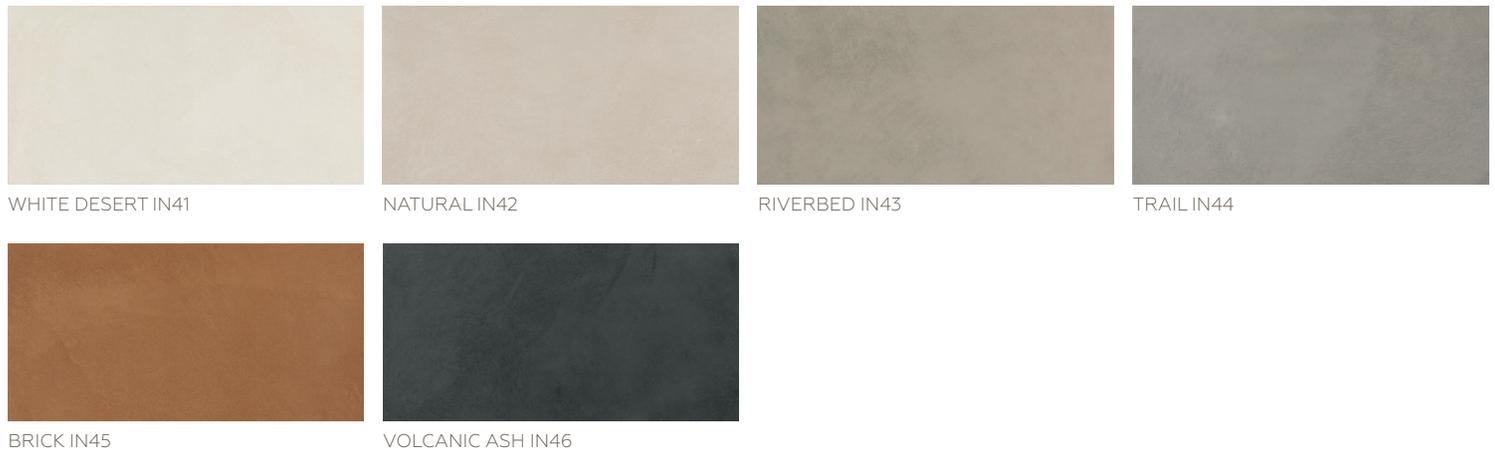

12 x 24 WOVEN TILE - COLORBODY™ PORCELAIN



50% MORE
SLIP RESISTANT
THAN ORDINARY TILE*

*When compared to tile meeting ANSI standards.



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics



INDOOR/OUTDOOR



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

2 x 9 FLOOR TILE - GLAZED PORCELAIN



WHITE DESERT IN41



NATURAL IN42



RIVERBED IN43



TRAIL IN44



BRICK IN45



VOLCANIC ASH IN46

2 x 9 FLUTED TILE - GLAZED PORCELAIN



WHITE DESERT IN41



NATURAL IN42



RIVERBED IN43



TRAIL IN44




BRICK IN45



VOLCANIC ASH IN46

4" CIRCLE MOSAIC - COLORBODY™ PORCELAIN WITH STEPWISE™ TECHNOLOGY



WHITE DESERT IN41




NATURAL IN42



RIVERBED IN43



TRAIL IN44



BRICK IN45



VOLCANIC ASH IN46

INDOTERRA™

COLORBODY™ PORCELAIN FLOOR & MOSAIC TILE WITH STEPWISE™ TECHNOLOGY AND GLAZED PORCELAIN FLOOR TILE



ALL STYLE. NO SLIPS.

Don't tip-toe through life. Step stylishly on non-slip tile that's 50% more slip resistant than ordinary tile. And because it's Daltile, you'll find beautiful natural looks that are waterproof, scratchproof, stainproof and dentproof.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile♦♦	(23-3/8" x 46-15/16") (59.44 cm x 119.20 cm)	5/16"	15.26	2
	24 x 24 Floor Tile♦♦	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.21	4
	12 x 24 Floor Tile♦♦	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9
	12 x 24 Woven Tile*	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9
	6 x 24 Floor Tile♦	(5-3/4" x 23-3/8") (14.60 cm x 59.44")	5/16"	10.23	11
	4" Circle Mosaic♦ (Mesh-mounted)	(13" x 13" Sheet) (33.02 cm x 33.02 cm Sheet)	5/16"	4.79	5
	2 x 9 Floor Tile	(2-1/4" x 9-1/2") (6.00 cm x 24.60 cm)	3/8"	5.72	36
	2 x 9 Fluted Tile	(2-1/4" x 9-1/2") (6.00 cm x 24.60 cm)	3/8"	5.72	36

* Tru-Edge™ applies. ♦ StepWise™ Technology applies to notated sizes only.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓***
Ramps & Inclines	≥ 0.65	✓***
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓†

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Floor and Mosaic tile only.

** Mosaic tile only.

*** ColorBody™ porcelain floor tile and Mosaic tile only.

† 2 x 9 Floor & Fluted tile and Mosaic tile only.

Note: 12 x 24 Woven ColorBody™ porcelain tile and 2 x 9 Fluted porcelain tile only suitable for walls/backsplashes due to the structured surface.

CONCRETE LOOK

TRIM

	Type	Number	Size	Pieces/ Carton
	Floor Bullnose	P43F9	3 x 24	10
	Cove Base	P36C9	6 x 12	22
	Cove Base Outcorner	PC36C9	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)</p> <p>Mosaic: 1/8" approximately</p>	Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

