



MOSAIC

DECORATIVE
INFINITE MIRAGE™
METAL & STONE



 **daltile®**
IMAGINE WHAT'S POSSIBLE™

DECORATIVE

INFINITE MIRAGE™

METAL & STONE

Escape To A Transcendent Design Oasis

The beauty of the Infinite Mirage™ collection draws inspiration from shimmering pools that are reflected in this smooth, hexagonal mosaic. A rich combination of lustrous brushed metal and deep natural stone mimics the intensity of lapping water, sparkling and pure. This collection offers design serenity with substantial variation that covers the entire color spectrum, perfect for those looking to add a modern twist to décor.

- DESIGN FROM EVERY ANGLE
 - Dynamic color differentiation for a multi-dimensional look
 - Features a unique, stretched hexagonal mosaic
- THE IDEAL SPOTLIGHT
 - Aluminum and natural stone visuals add a luminous finish
 - Available in four opalescent color blends

MOSAIC

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



MX
METAL MOSAIC

LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES


Cover and above photos feature Infinite Mirage™ Eternal Dream hexagon mosaic on the wall.

SIZES:



FINISHES: SATIN | GLOSSY

1 x 4 HEXAGON MOSAIC

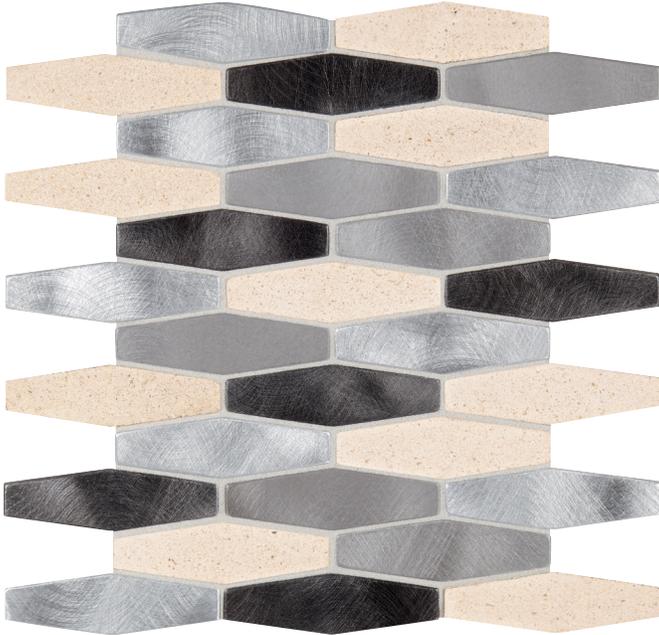


TIMELESS ILLUSION IM04



ETERNAL DREAM IM05



ENDLESS REVERIE IM06

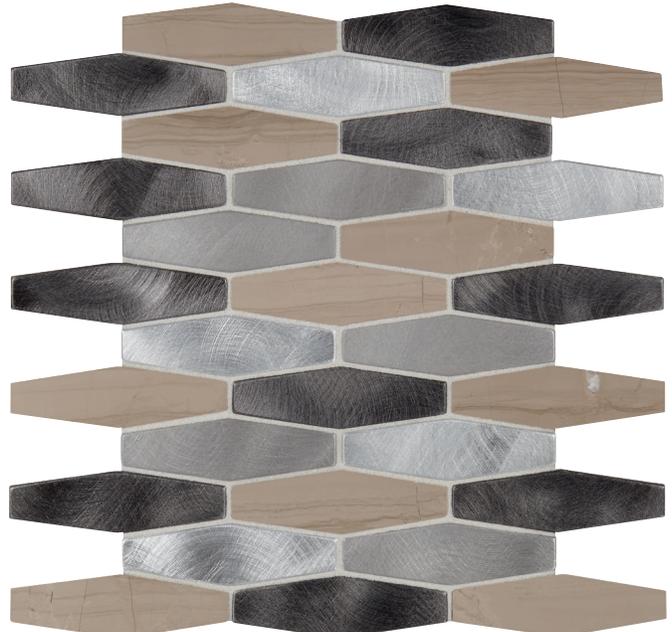

FOREVER AURA IM07



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

SIZES

	Thickness	Sq. Ft./ Carton	Pieces/ Carton
 Hexagon Mosaic (12-1/8" x 11-7/8" Sheet) (Mesh-mounted on 12" x 12" Sheet) (30.81 cm x 30.17 cm Sheet)	3/8"	8.80	11

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" Approximately	 Random (V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

NOTES

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Since there are variations in all fired ceramic, natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

For additional information refer to "Factors to Consider" at daltille.com/Factors.

 PRE-CONSUMER
RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.