

STONE LOOK



MEDIAN™
COLORBODY™ PORCELAIN



 daltile®
IMAGINE WHAT'S POSSIBLE™

MEDIAN™

COLORBODY™ PORCELAIN

Reliable, Durable Style

Median™ features both durability and beauty in design. It has the versatility and functionality needed for both residential and commercial installations. Available in six on-trend colors, this TruEdge™ rectified and modular collection offers unique design possibilities by combining multiple surface textures and sizes. Median comes in 12x24 and 24x24 and features a 4x24 bullnose in both matte and polished finishes.

• BOUNDLESS DURABILITY

- Suitable for use on floors, walls and countertops
- Matte and Textured finishes suitable for kitchen and bathroom floors
- Textured finish available in 24x24 is perfect for exterior floors

• VERSATILE DESIGN

- Neutral color palette works well in various styles of design
- Popular 12x24 and 24x24 floor tile sizes
- Trim package includes floor bullnose, cove base and cove base outcorner

STONE LOOK

USAGE



SPECIAL FEATURES

Cover photo features Median™ Charcoal 24 x 24 textured on the wall and Gray 24 x 24 matte on the floor. Above photo features Median™ Taupe 24 x 24 polished on the wall and Grey 24 x 24 textured on the floor.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



24 x 24
Floor Tile



12 x 24
Floor Tile

FINISHES: MATTE | POLISHED | TEXTURED

COLOR PALETTE




WHITE




BEIGE




TAUPE



LIGHT GRAY



GRAY



CHARCOAL


FLOOR TILE



WHITE MN40



BEIGE MN41

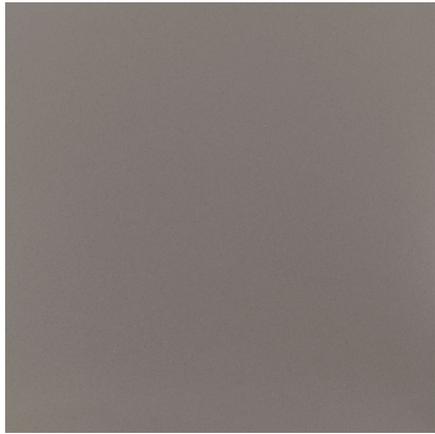


TAUPE MN42



LIGHT GRAY MN43



GRAY MN44



CHARCOAL MN45



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT™
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 24 Floor Tile [^]	(23-5/8" x 23-5/8") (60.00 cm x 60.00 cm)	3/8"	15.50	4
	12 x 24 Floor Tile	(11-3/4" x 23-5/8") (29.85 cm x 60.0 cm)	5/16"	13.45	7

[^] Textured finish available in 24 x 24 size only.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Matte and Textured only.

** Textured only.

PERFORMANCE CHARACTERISTICS

	ASTM#	Textured Result	Matte Result	Polished Result
Water Absorption	C373	< 0.5%	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbs	> 275 lbs	> 275 lbs
Scratch Hardness	MOHS	8.0	6.0	5.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

TRIM

	Type	Number	Size	Pieces/ Carton
	Floor Bullnose [•]	S44F9	4 x 24	12
	Cove Base [◄]	P36C9TB	6 x 12	22
	Cove Outcorner [◄]	PC36C9TB	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

[•] Available in Matte and Polished finishes only.

[◄] Available in Matte finish only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

DURABILITY

Floor Surface Wear Resistance

- 1 Residential Bathrooms (3) All Residential / Light Commercial⁺
- 2 All Residential Areas (4) All Residential / Commercial⁺

⁺ Polished finish only.

[•] Matte and Textured finishes only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

 **PRE-CONSUMER RECYCLED MATERIALS**

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.