



CONCRETE LOOK

MEMOIR™
GLAZED CERAMIC



 daltile®
IMAGINE WHAT'S POSSIBLE™

MEMOIR™

GLAZED CERAMIC

Historic Design

Catch a glimpse of historic design with Memoir™. This mesmerizing assortment consists of concrete-like encaustic tile available in four patterns and two color tones each. Memoir is a collection that will make a statement and create everlasting memories.

- MEMORABLE DESIGNS
 - Four encaustic patterns in geometrical and floral designs, which create a continuous pattern from piece to piece
 - Four versatile patterns, each offered in two color tones
- DESIGN WITH CHARACTER
 - 12x12 size suitable for both floor and wall applications
 - Can be utilized as stand-alone or paired as a decorative accent with other collections like Koncrete™

CONCRETE LOOK

USAGE



SPECIAL FEATURES

Cover photo features Memoir™ Jewel Black 12 x 12 on the wall and Revotile™ Calacatta Marvel 12 x 24 on the floor.
Above photo features Memoir™ Cosmo Grey 12 x 12 on the fireplace and Koncrete™ Grey 12 x 24 on the floor.

SEE CHARTS FOR FULL PRODUCT DETAILS

SIZES:



12 x 12
Floor Tile

FINISHES: MATTE

COLOR PALETTE



PETAL
GREY



PETAL
BLACK



CRYSTAL
GREY



CRYSTAL
BLACK



COSMO
GREY



COSMO
BLUE



JEWEL
GREY



JEWEL
BLACK

FLOOR TILE



PETAL GREY ME20



CRYSTAL GREY ME24



COSMO GREY ME28



JEWEL GREY ME26




PETAL BLACK ME21



CRYSTAL BLACK ME25



COSMO BLUE ME29

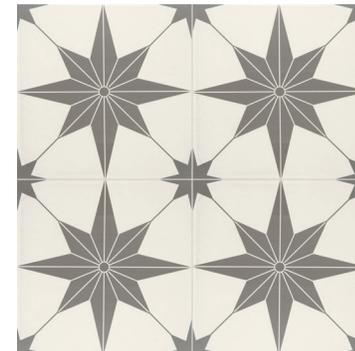

JEWEL BLACK ME27



SLIP RESISTANT



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



SIMPLECLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	15.52	16

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms (3)	All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.