



MOSAIC

MIRAMO™ + MICROBAN®
GLAZED CERAMIC with MICROBAN® TECHNOLOGY

PROTECTION THAT LIVES ON



 **dalTile**®
IMAGINE WHAT'S POSSIBLE™

MIRAMO™ + MICROBAN®

GLAZED CERAMIC with MICROBAN® TECHNOLOGY

Inspired by the glistening colors of Moroccan tilework, Miramo offers a fresh take on handcrafted-inspired mosaic tile. Make a splash with six curated colors ranging from soft neutrals, vibrant blues to a deep-sea green. Offered in three popular mosaic shapes: Picket mosaic, Fan mosaic and the modern 1 x 6 mosaic, plus a coordinating jolly to complete the look. Miramo's tiles are protected with DEFEND, powered by Microban™, eliminating 99% of the bacteria on the tile's surface, 24/7.



Cover photo features Miramo™ Aqua 3" Fan mosaic on the vanity backsplash and Panoramic Porcelain Surfaces™ Elemental Selection, Anthracite on the floor and outer wall. Above photo features Outlander™ Dusk, Grande design 24 x 24 matte on the floor.

Above photo features Miramo™ Pearl 2 x 5 Picket Mosaic on the fireplace wall and Rekindle™ White 12 x 24 on the floor.

MOSAIC

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



GLAZED CERAMIC

LOW HIGH

SPECIAL FEATURES


NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



FINISHES: GLOSSY

1 x 6 MOSAIC

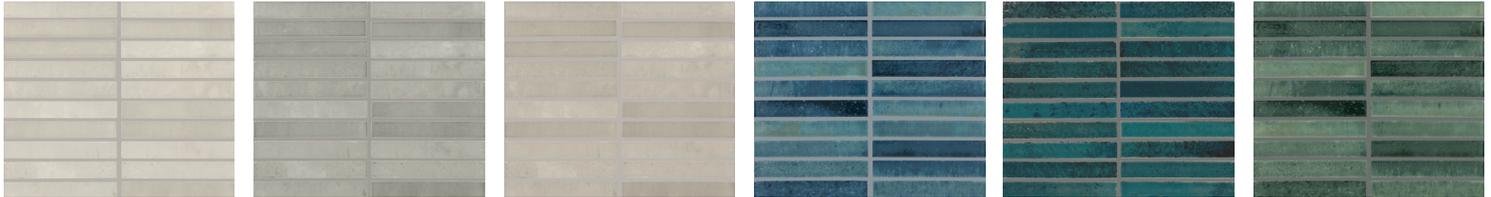

PEARL MR44

OYSTER MR45

SAND MR46

AQUA MR47

HORIZON MR48

REEF MR49

2 x 5 PICKET MOSAIC



PEARL MR44

OYSTER MR45

SAND MR46

AQUA MR47

HORIZON MR48

REEF MR49

3" FAN MOSAIC



PEARL MR44

OYSTER MR45

SAND MR46

AQUA MR47

HORIZON MR48

REEF MR49



STAINPROOF



DENTPROOF



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics



SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	1 x 6 Mosaic (Dot-mounted)	(11-1/2" x 9-3/4" Sheet) (29.21 cm x 24.76 cm Sheet)	5/16"	8.30	10
	2 x 5 Picket Mosaic (Dot-mounted)	(12-1/4" x 11-1/8" Sheet) (31.11 cm x 28.25 cm Sheet)	1/4"	8.76	12
	3" Fan Mosaic (Dot-mounted)	(13-1/4" x 12-3/4" Sheet) (33.65 cm x 32.38 cm Sheet)	1/4"	10.20	10

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES :

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces/ Carton
 Jolly*	S1/212J	1/2 x 12	12

*Microban® Technology is applicable to the mosaic tile only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1 x 6 Mosaic & 2 x 5 Picket Mosaic: 1/8" 3" Fan Mosaic: 1/16"	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.