




WALL

MIZUYA CLAY™

GLAZED PORCELAIN WALL TILE

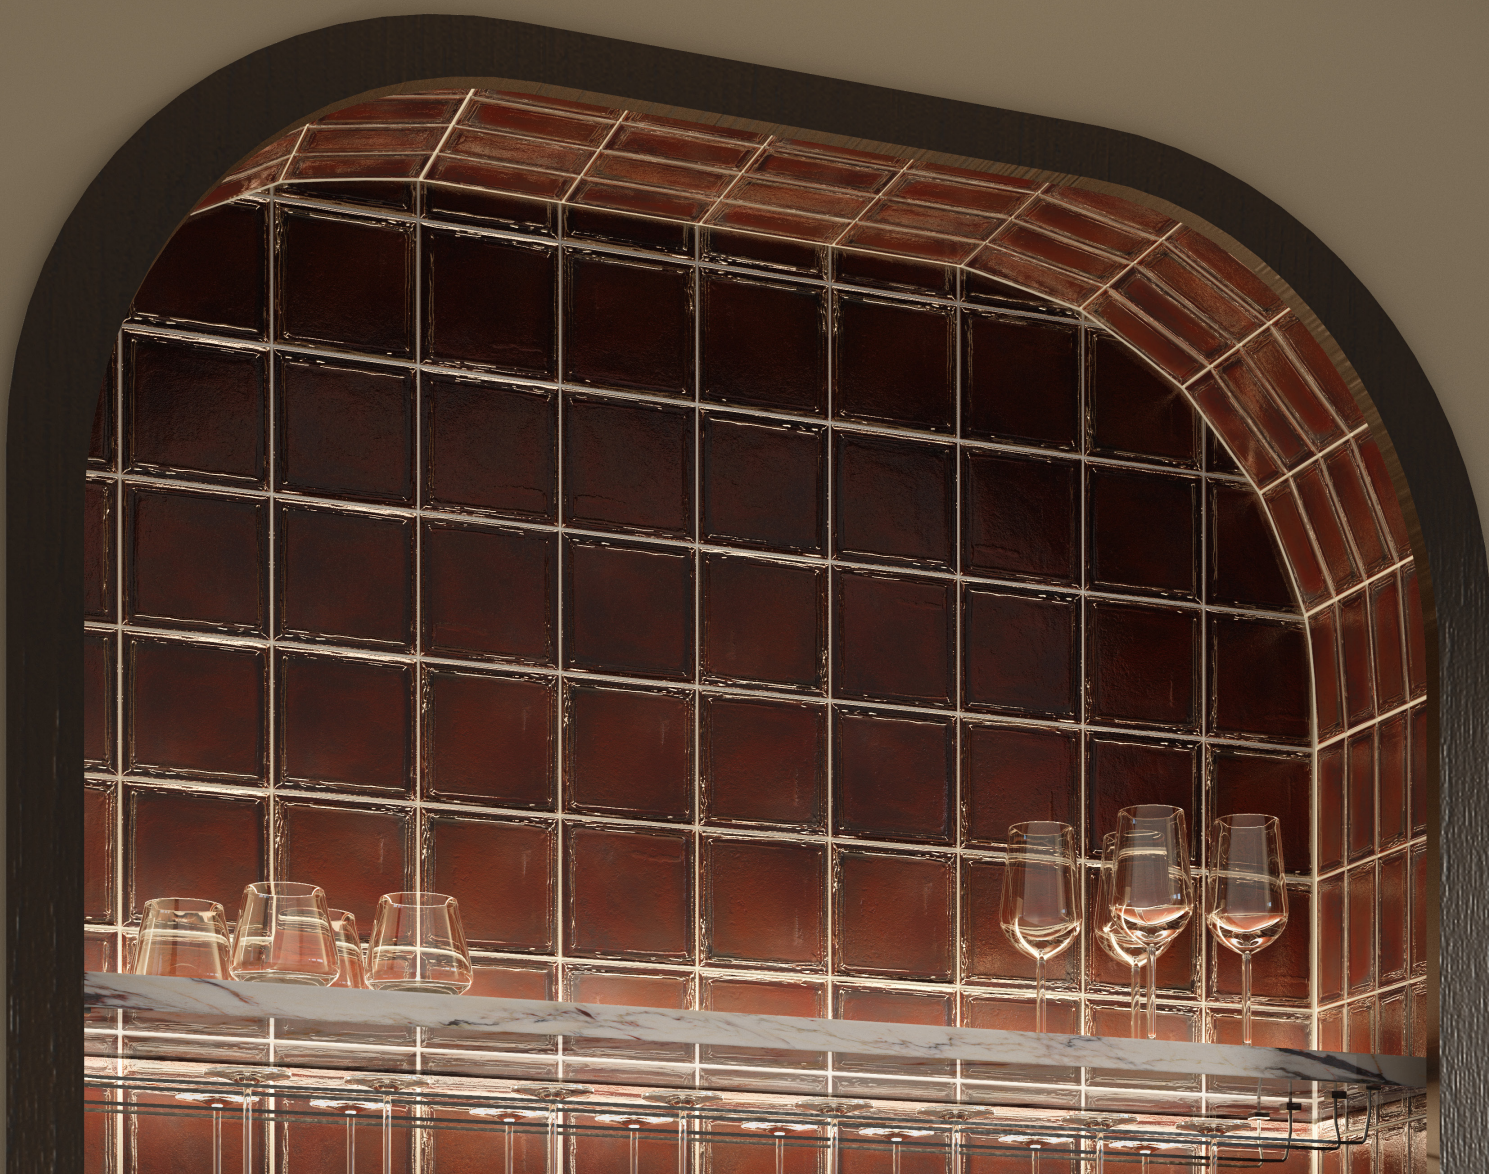

 daltille®

MIZUYA CLAY™

GLAZED PORCELAIN WALL TILE

Steep in the rich, calming essence of Mizuya Clay, a glazed porcelain wall tile collection inspired by the artistry and tradition of Japanese tea culture. Bringing a sense of ritual, warmth, and quiet sophistication into the modern space, this collection blends timeless inspiration with contemporary style. Available in versatile modular dimensional sizes, Mizuya Clay creates unique statement walls with an elevated feel. From soft earthy whites to deep browns, the six-color palette layers spaces with rich texture and a beautifully moody atmosphere, transforming walls into an experience rooted in intentional design.

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



REVEAL SYNC3D™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



PG

LOW HIGH

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SPECIAL FEATURES

IMAGINE WHAT'S POSSIBLE™



WITH DAL TILE DESIGNS

Cover photo features Mizuya Clay™ Ko Brown, 5-1/2 x 5-1/2 on the back wall and 2-3/4 x 5-1/2 in the interior arch paired with Panoramic Porcelain Surfaces™ Calacatta Aries on the countertop. Above photo features 5-1/2 x 5-1/2 in the interior arch and 2-3/4 x 5-1/2 on the exterior wall.

WALL

MIZUYA CLAY™

GLAZED PORCELAIN WALL TILE

SIZES:



5-1/2 x 5-1/2
Framed Wall Tile



2-3/4 x 5-1/2
Framed Wall Tile

FINISHES: GLOSSY

COLOR PALETTE




SHIRA WHITE MC64




MUJI BEIGE MC65



TEN GRAY MC67



SEN GREEN MC68



KO BROWN MC66



RYO BLUE MC69

GLAZED PORCELAIN 5-1/2 x 5-1/2 FRAMED WALL TILE



SHIRA WHITE MC64



MUJI BEIGE MC65



TEN GRAY MC67



SEN GREEN MC68



KO BROWN MC66



RYO BLUE MC69

GLAZED PORCELAIN 2-3/4 x 5-1/2 FRAMED WALL TILE



SHIRA WHITE MC64



MUJI BEIGE MC65



TEN GRAY MC67



SEN GREEN MC68



KO BROWN MC66



RYO BLUE MC69



WATERPROOF



STAINPROOF



DENTPROOF



FIRE-RESISTANT*



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

MIZUYA CLAY™

GLAZED PORCELAIN WALL TILE



SIZES

			Thickness	Finish
	5-1/2 x 5-1/2 Framed Wall Tile	5-7/16" x 5-7/16" (13.90 cm x 13.90 cm)	3/8"	
	2-3/4 x 5-1/2 Framed Wall Tile	2-11/16" x 5-7/16" (6.85 cm x 13.90 cm)	3/8"	

 Glossy Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	≥ 275 lbf
Scratch Hardness	C1895	7.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to “Factors to Consider” at: daltille.com/Factors. Use of a white latex modified thin-set is recommended for installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltille® products and information,
visit our website at daltille.com.



©2026 Daltille (08/26)