



WALL

MULTITUDE™

GLAZED CERAMIC WALL TILE

 daltile®

MULTITUDE™

GLAZED CERAMIC

A Marvelous Canvas of Color and Texture

With a subtle finish and pronounced patterns, Multitude™ tile gives you a different look at every glance. It differentiates itself with a combination of rich colors and a 3-D pinstriped graphic that underlies flat, hexagonal and wave patterns. Offered in five vibrant colors and a large modern size, this design adds depth and character to any room.

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



REVEAL SYNC3D™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



CG GLAZE



LOW HIGH

SPECIAL FEATURES

SEE CHARTS FOR FULL PRODUCT DETAILS.


Cover photo features Domino Black 12 x 24 Wave and Hexagon on the wall.
Above photo features Urban Grey Wave 12 x 24 on the wall.

SIZES:



FINISHES: SATIN | TEXTURED

WALL TILE (SHOWN IN FLAT)

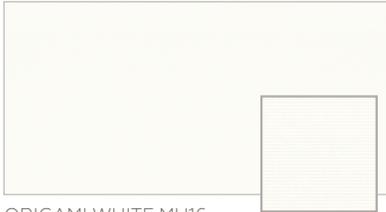

ORIGAMI WHITE MU16



Close-up
of tile

WALL TILE (SHOWN IN WAVE)



ORIGAMI WHITE MU16

WALL TILE (SHOWN IN HEXAGON)



ORIGAMI WHITE MU16



URBAN GREY MU18




Close-up
of tile




URBAN GREY MU18




URBAN GREY MU18

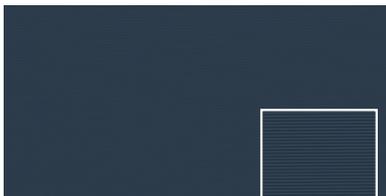


NOSTALGIC BLUE MU19




Close-up
of tile

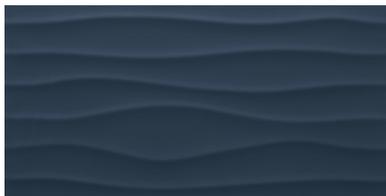


NOSTALGIC BLUE MU19

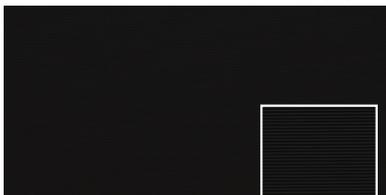


DOMINO BLACK MU20



Close-up
of tile

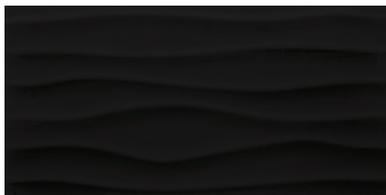

DOMINO BLACK MU20

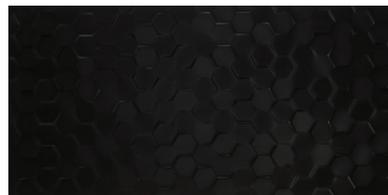

DOMINO BLACK MU20

JOLLY TRIM – SOLID COLORS



ORIGAMI WHITE MU21



URBAN GREY MU23



NOSTALGIC BLUE MU24



DOMINO BLACK MU25



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



SIMPLICLEAN™

MULTITUDE™

GLAZED CERAMIC WALL TILE

WALL

SIZES

			Thickness	Finish
	12 x 24 Wall Tile	11-3/4" x 23-3/4" (29.90 cm x 60.42 cm)	3/8"	S T

S Satin Finish **T** Textured Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

TRIM

	Type	Number	Size	Finish
	12" Jolly	S1/212J	1/2 x 11-15/16	S

S Satin Finish

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

1/8" (when used in a staggered brick-joint pattern; overlap should not exceed 33%)



Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	≥ 125 lbf
Scratch Hardness	C1895	≥ 4.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

LRV CHARACTERISTICS

	LRV
	Illuminate-OBS: F02-02 (CWF)
ORIGAMI WHITE MU16	81.3
URBAN GREY MU18	43.2
NOSTALGIC BLUE MU19	8.3
DOMINO BLACK MU20	5.6

NOTES

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at daltile.com/Factors.

PRE-CONSUMER RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



ZEROTOX

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

 **daltile**®

©2026 Daltile (02/26)