









READY WHEN

YOU ARE

DALTILE ONDEMAND

In a world that moves fast, your projects can't wait.

Daltile OnDemand Ready-to-ship tile solutions are built for speed, reliability, and design confidence.

OnDemand offers an alluring range of in-stock and ready-to-ship tile that easily fits many styles and demands. This carefully selected assortment of neutral colors and beloved sizes makes this collection the perfect blueprint for any design.







$CALGARY^{TM}$

Infuse tranquility into any space with a calming stone color palette.



Rich neutral colors in a plaster or cement visual to enhance any space.



HAUT MONDETM Soft sandstone in modern hues, provides the perfect canvas for creating welcoming spaces.



An impressive palette of neutral hues creates calm monochromatic effects.



ERPETUOT

Timeless marble veining meets a striking yet serene white that makes a powerful statement.



$SYNCHRONIC^{TM}$

An ultra-durable and high-performing tile in an array of neutral colors in a matte finish.





A soft cement look and handsome pressed edges will help transform any environment.

CALM VERSATILITY

CALGARY[™]

Infuse a sense of tranquility into any environment with this soothing color palette, offered in a matte finish. Crafted with StepWise™ Technology, this collection allows you to create peaceful spaces that flow effortlessly from indoors to out, merging style, durability, and everyday comfort.

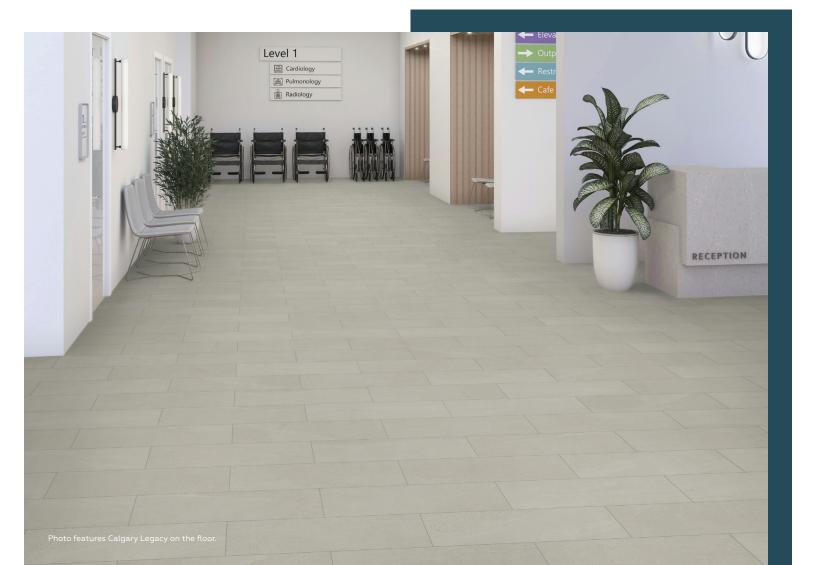

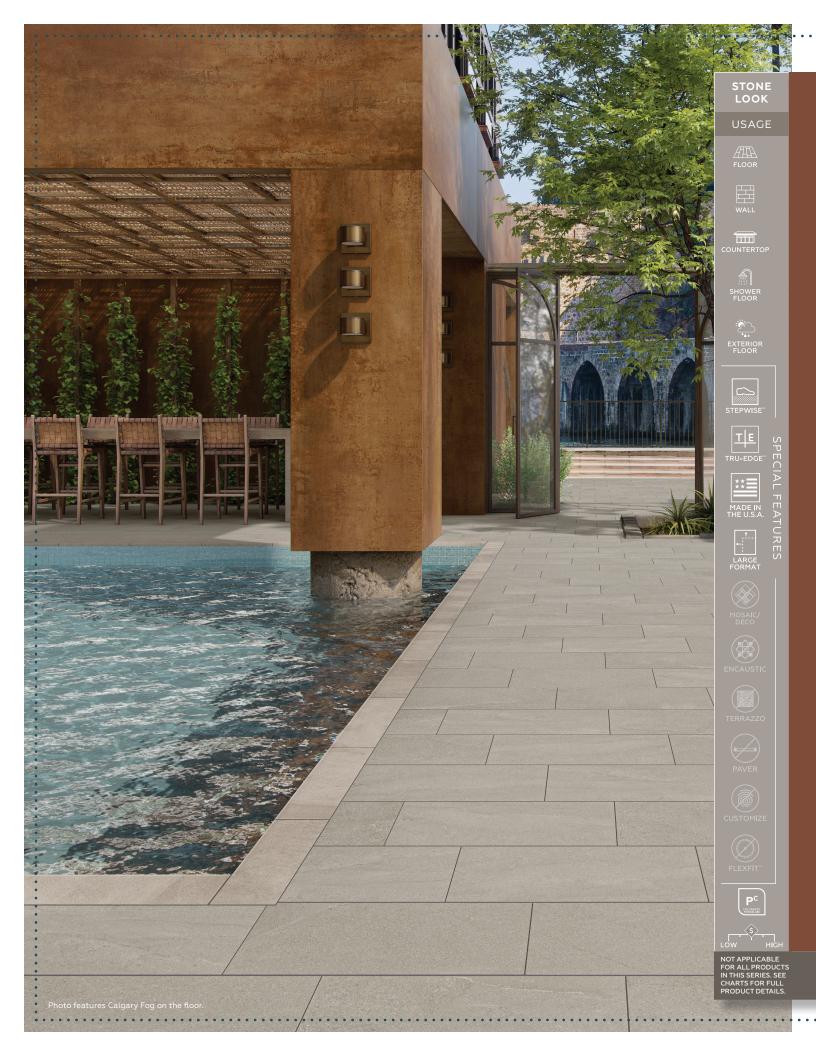

(SIZES:

12 x 24 Floor Tile

FINISHES: MATTE

FLOOR TILE





FAWN CG41



FOG CG42



















SLIPRESISTANT WATERPROOF STAINPROOF DENTPROOF SCRATCH-RESISTANT' FIRE-RESISTANT

		Thickness	Finish	Made in U.S.A
12 x 24 Floor Tile*	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M	**
e Finish				
	Floor Tile*	Floor Tile* (29.56 cm x 59.44 cm)	12 x 24 11-5/8" x 23-3/8" 5/16" Floor Tile* (29.56 cm x 59.44 cm) 5/16"	12 x 24 11-5/8" x 23-3/8" 5/16" M Floor Tile* (29.56 cm x 59.44 cm) 5/16"

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	/ *
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	✓ **
Exterior Floor Applications, including patios, pool decking & other wet areas with minimal footwear	≥ 0.60	/ *
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of \ge 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest", visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

- * Matte Finish only
- ** 12 x 24 in matte finish only

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0 (Matte) 6.0 (Polished)
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.



Don't tip-toe through life. Step stylishly on non-slip tile that's 50% more slip resistant than ordinary tile. And because it's Daltile, you'll find beautiful natural looks that are waterproof, scratchproof, stainproof and dentproof.

TRIM

Туре	Number	Size	Pieces/ Carton
Bullnose	P43F9	3 x 24	10
Cove Base*	P36C9	6 x 12	22
Cove Base Outcorner*	PC36C9	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/ or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	Random (V4)

DURABILITY				
Floor Surface Wear Resistance				
1	Residential Bathrooms	3	All Residential / Light Commercial	
2	All Residential Areas	4	All Residential / Commercial	

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.













^{*}Available in matte finish only

RESONATING


DEPTH

$CHORD^{\mathsf{m}}$

March to your own beat with Chord ColorBody™ Porcelain tile.

Rich neutral colors featuring a plaster graphic or a cement visual worn by time and nature to enhance any space and add harmonious composition.



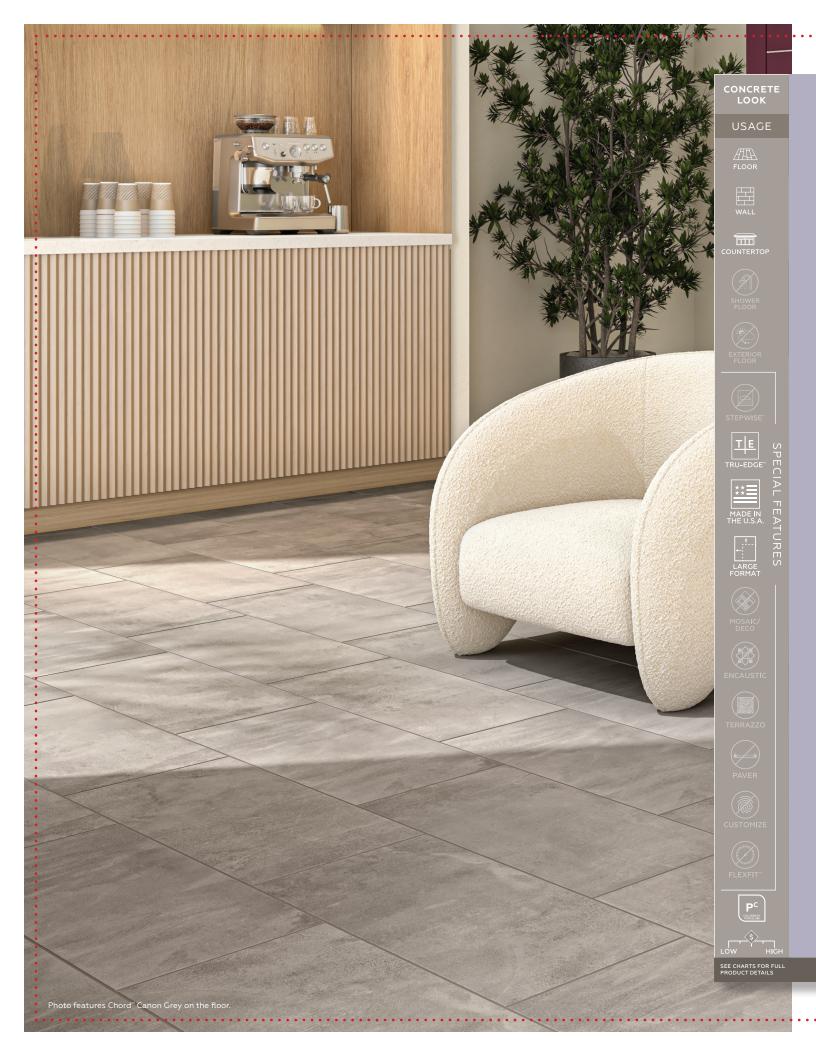







FINISHES: MATTE

FLOOR TILE

PLASTER VISUAL



CANON GREY CH22

CEMENT VISUAL



FORTE GREY CH25





















		Thickness	Sq. Ft./ Carton	Pieces/ Carton
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	~
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{"}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
	Α3111#	riesutt
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

TRIM

Туре	Number	Size	Pieces/ Carton
Cove Base	P36C9	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation	
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	High (V3)	

DURABILITY

Fl	oor Surface Wear Resista	ınce	
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.














CONTEMPORARY

APPEAL

HAUT MONDE™

Interpreting soft sandstone in modern hues, the Haut Monde series provides the perfect design canvas for creating welcoming spaces. While the fine grain of sandstone provides a uniform appearance, a sense of dimension adds depth of interest to Haut Monde.

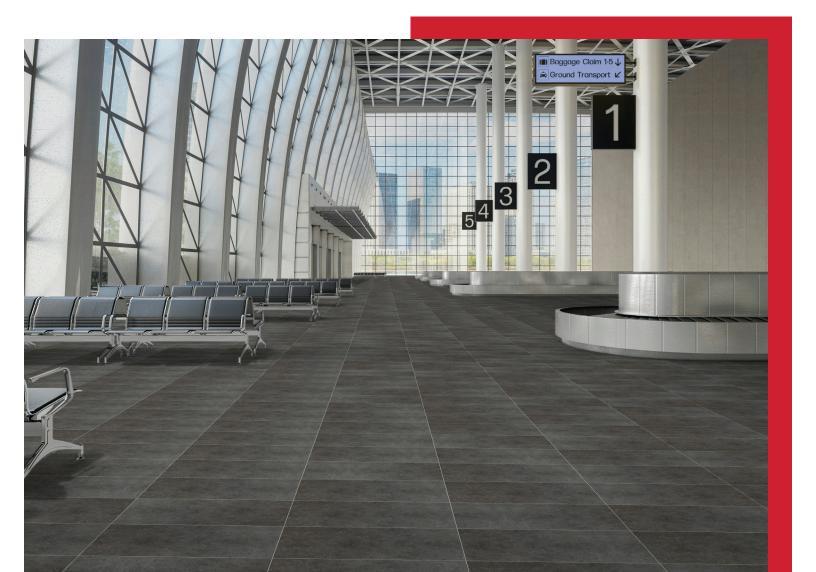



STONE LOOK

































COLORBODY™ PORCELAIN





FINISHES: MATTE

FLOOR TILE



GLITTERATI GRANITE HM03



ELITE GREY HM05



EMPIRE BLACK HM06



NOBILITY WHITE HM08



S WATERDR













FIRE-RESISTANT

CLIMATEPRO™



		Thickness	Sq. Ft./ Carton	Pieces/ Carton
	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{"}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.







All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

TRIM

Туре	Number	Size	Pieces/ Carton
Cove Base	S36C9	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.








MODULAR MINIMALISM

PORTFOLIO™

As popular as the contemporary tone-on-tone look of cement may be, it's even more appealing with the added depth and richness of the Portfolio™ series. An impressive palette of neutral hues creates calm monochromatic effects. Portfolio is an incredibly resourceful choice that's bound to be a favorite in any commercial space.




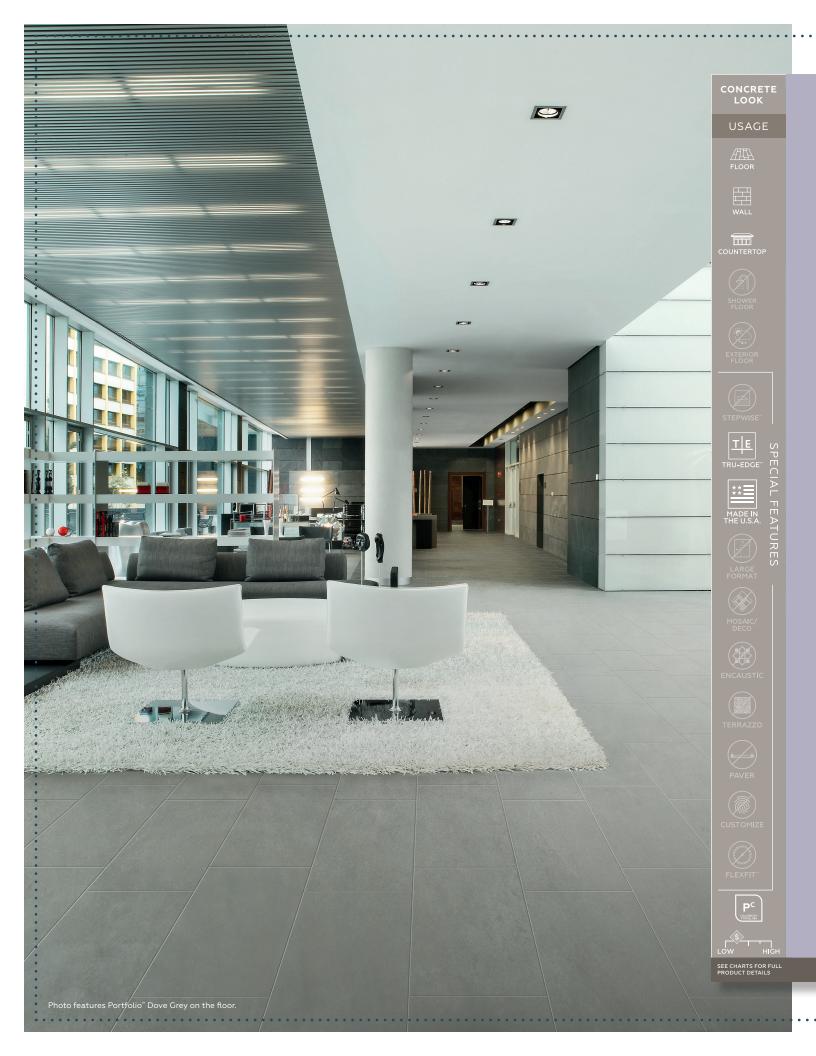










FLOOR TILE





ICE PF01 WHITE PF02



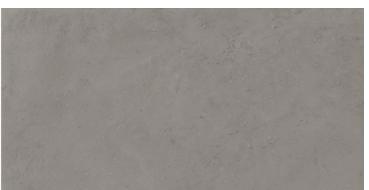

DOVE GREY PF04 ASH GREY PF05





IRON GREY PF06 CHARCOAL PF09



















Shade Variation

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	15.12/17.02	8/9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{\text{\tiny T}}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/ TestResults.

TRIM

Туре	Number	Size	Pieces/ Carton
Cove Base	P36C9TB	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation

1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	Medium (V2)

DURABILITY

Floor Surface Wear Resistance				
1	Residential Bathrooms	3	All Residential / Light Commercial	
2	All Residential Areas	4	All Residential / Commercial	

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.













TIMELESS BEAUTY

PERPETUO[™]

The timeless beauty of marble veining meets striking visuals in a simple yet powerful white that makes a statement while remaining calm and grounded.









FLOOR TILE



BRILLIANT WHITE PT21























			Thickness	Finish	Made in U.S.A
	12 x 24 Floor Tile*	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	MP	**
_	e Finish P Polisi es TruEdge™ Techno				

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	√ *
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{\text{\tiny T}}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed. Wall and mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed. * Matte finish only.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0 (Matte) 6.0 (Polished)
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

TRIM

	Туре	Number	Size	Finish
	Floor Bullnose	P43F9	3 x 24	M
	Jolly	S1/212J	1/2 x 12	S
M Matte Finish S Satin Finish (Available in PT20, PT21, PT22, PT23 only.)				

Matte Finish

INSTALLATION	
Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/ or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	Random (V4)
DUDABILITY	

DURABILITY

Flo	oor Surface Wear Resista	nce	
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.














PEAK PERFORMANGE


SYNCHRONIC[™]

Explore new terrain with Synchronic[™], an ultra-durable and high-performing

ColorBody[™] porcelain tile. An array of neutral colors in a matte finish. Proudly made in the

U.S.A. and rectified, Synchronic delivers a minimalistic concrete look with quality and style.

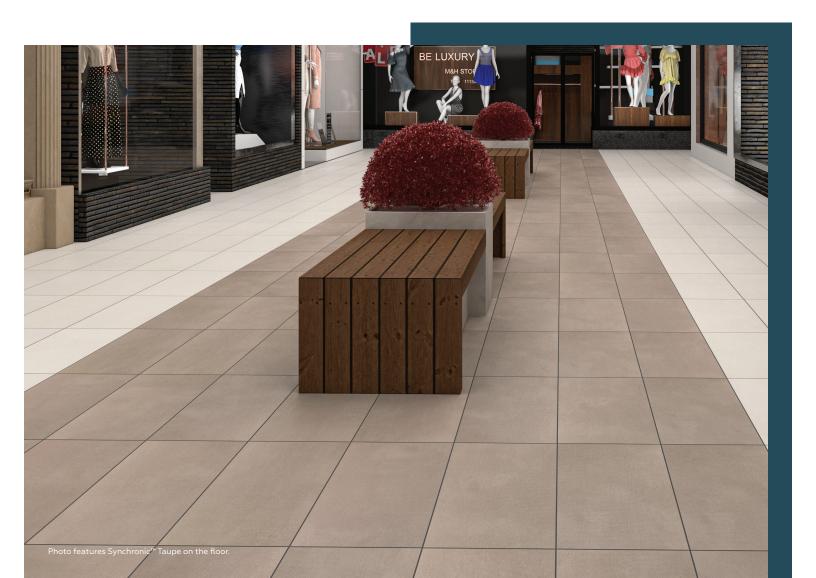

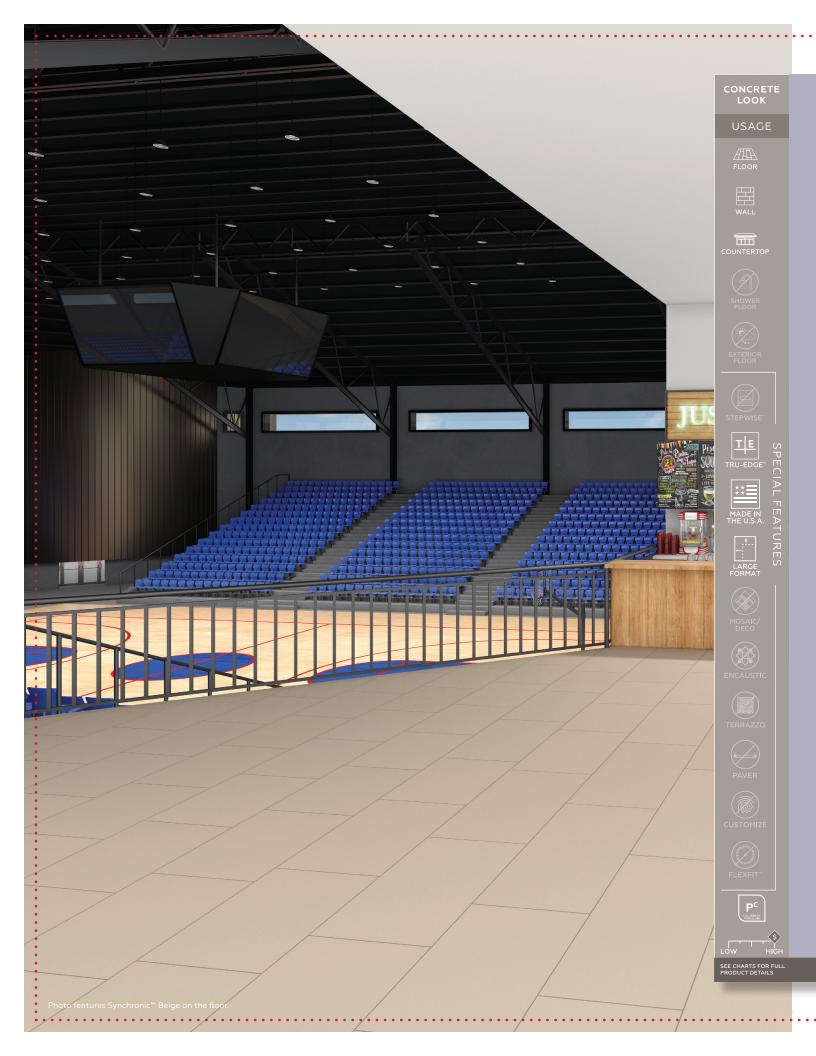



(SIZES:



FINISHES: MATTE

FLOOR TILE





BEIGE SY31 TAUPE SY32



GREY SY33





















		Thickness	Sq. Ft./ Carton	Pieces/ Carton
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	~
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{"}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

TRIM

Туре	Number	Size	Pieces/ Carton
Cove Base	P36C9	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	Medium (V2)

DURABILITY

Flo	oor Surface Wear Resista	ınce	
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.











A PERFECT GANVAS

VOLUME 1.0™

Commercial settings are sure to make ample use of versatile Volume 1.0™. This made in the U.S.A product not only comes in a rich palette of hues but also offers our high-DCOF StepWise™ technology. With its soft cement look and handsome pressed edges, this adaptable glazed porcelain tile will help transform any environment.





SIZES:

12 x 24
Floor Tile
Floor Tile

FINISHES: MATTE

FLOOR TILE



DEGREES SILVER VL71



INTENSITY PEBBLE VL72



STEREO GREY VL73



SONIC WHITE VL75

 $\begin{tabular}{ll} \textbf{NOTE:} PLEASE SEE KEYSTONES" SERIES FOR COORDINATING MOSAICS. VISIT DALTILE.COM/KEYSTONES. FOR MORE INFORMATION, VISIT DALTILE.COM/VOLUME11. \\ \end{tabular}$

















DENTPROOF SO

SCRATCH-RESISTANT

INDOOR/OUTDOOR

GLAZED PORCELAIN WITH STEPWISE™ TECHNOLOGY

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
12 x 24 Floor Tile	(11-7/8" × 23-5/8") (30.23 cm × 60.12 cm)	5/16"	17.60	9
12 x 12 Floor Tile	(11-7/8" × 11-7/8") (30.23 cm × 30.23 cm)	5/16"	16.72	17

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	✓
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	~
Ramps & Inclines	≥ 0.65	✓
Walls/Backsplashes	N/A	✓
Countertops	N/A	~
Pool Linings	N/A	
		<u> </u>

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{"}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/ TestResults.



Don't tip-toe through life. Step stylishly on non-slip tile that's 50% more slip resistant than ordinary tile. And because it's Daltile, you'll find beautiful natural looks that are waterproof, scratchproof, stainproof and dentproof.

TRIM

Туре	Number	Size	Pieces/ Carton
Cove Base	P-36C9TB	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)	Medium (V2)

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Use of latex modified thin-set is recommended for installation. For more information, visit daltile.com

















