




TERRAZZO LOOK

OUTLANDER™

COLORBODY™ PORCELAIN with STEPWISE™ TECHNOLOGY

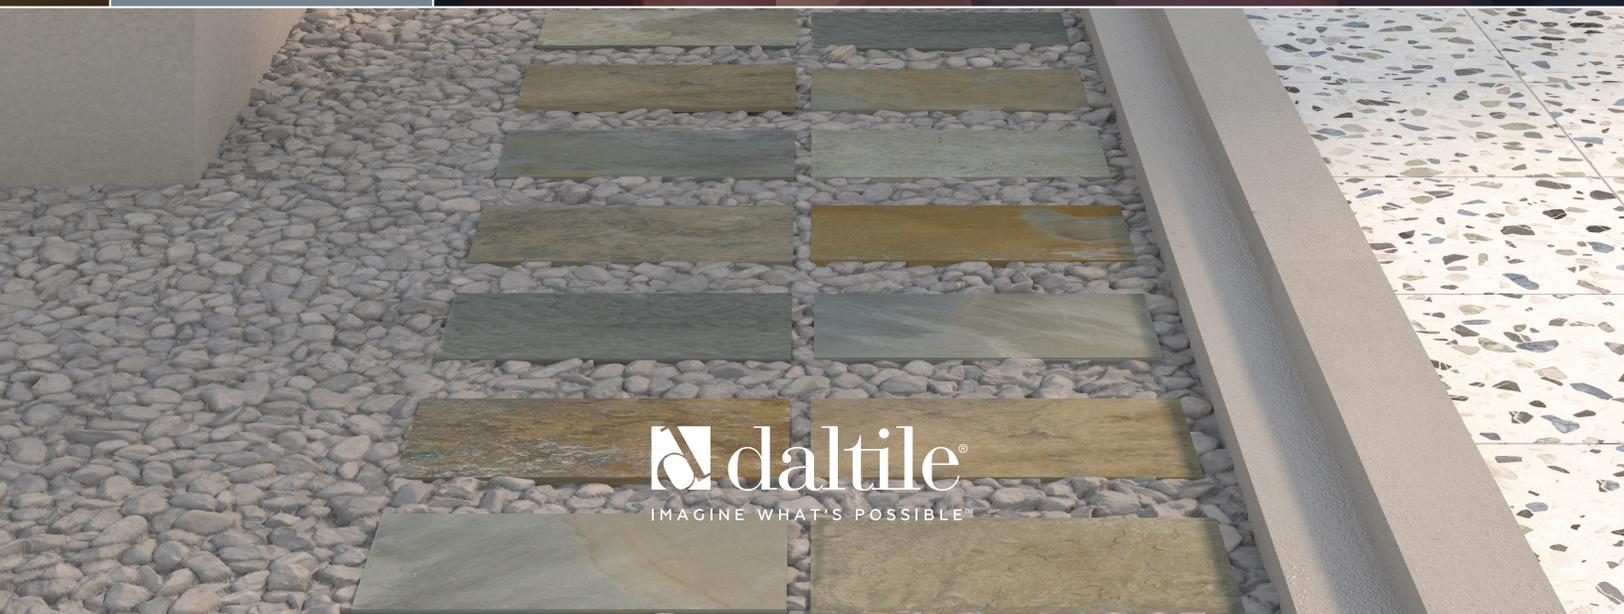

 daltile®  
IMAGINE WHAT'S POSSIBLE™

# OUTLANDER™

COLORBODY™ PORCELAIN with STEPWISE™ TECHNOLOGY

Embark on an adventure like no other with our contemporary terrazzo look tile. Rooted in rich art history, Outlander is making its modern debut in an ultra-durable, ColorBody™ porcelain tile, available in today's most popular sizes and three stunning designs: Grande, Palazzo, and Medio. With the added benefit of our StepWise™ Technology, you can create a seamless design from the indoor to outdoor space.

## TERRAZZO LOOK

### USAGE



## SPECIAL FEATURES



Cover photo features Outlander™ Marine, Grande design 24 x 24 matte on the right patio floor and bottom half of shower & wall, and Marine, Palazzo design 24 x 24 matte on the top half of the shower & wall.

Above photo features Outlander™ Dusk, Grande design 24 x 24 matte on the floor.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



24 x 48  
Floor Tile



24 x 24  
Floor Tile



12 x 24  
Floor Tile

FINISHES: MATTE

GRANDE DESIGN




MARINE OU55




MOONLIGHT OU56



STERLING OU57



DUSK OU58



ONYX OU59

PALAZZO DESIGN



MARINE OU55



MOONLIGHT OU56



STERLING OU57



DUSK OU58



ONYX OU59

MEDIO DESIGN – MADE TO ORDER




MARINE OU55




MOONLIGHT OU56



STERLING OU57



DUSK OU58



ONYX OU59

**50% MORE**  
SLIP RESISTANT  
THAN ORDINARY TILE\*

\*When compared to tile meeting ANSI standards.



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



INDOOR/OUTDOOR



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT [WWW.DAL TILE.COM](http://WWW.DAL TILE.COM) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# OUTLANDER™

COLORBODY™ PORCELAIN with STEPWISE™ TECHNOLOGY

TERRAZZO LOOK



## ALL STYLE. NO SLIPS.

Don't tip-toe through life. Step stylishly on non-slip tile that's 50% more slip resistant than ordinary tile. And because it's Daltile, you'll find beautiful natural looks that are waterproof, scratchproof, stainproof and dentproof.

### SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-3/8" x 46-15/16") (59.44 cm x 119.30 cm)	5/16"	15.26	2
	24 x 24 Floor Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.21	4
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9

### APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

#### APPLICATION NOTES :

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

### TRIM

Type	Number	Size	Pieces/ Carton
Bullnose*	P43F9	3 x 24	10

\*Available in Palazzo design only.

### INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	Medium (V2)

### PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

### DURABILITY

#### Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	④ All Residential / Commercial

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).



7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



©2023 Daltile (1/23)