



TERRAZZO LOOK


OUTLANDER™ +



50% MORE
SLIP RESISTANT
THAN ORDINARY TILE*

*When compared to the leading ANSI Standards

COLORBODY™ PORCELAIN FLOOR WITH STEPWISE™ TECHNOLOGY

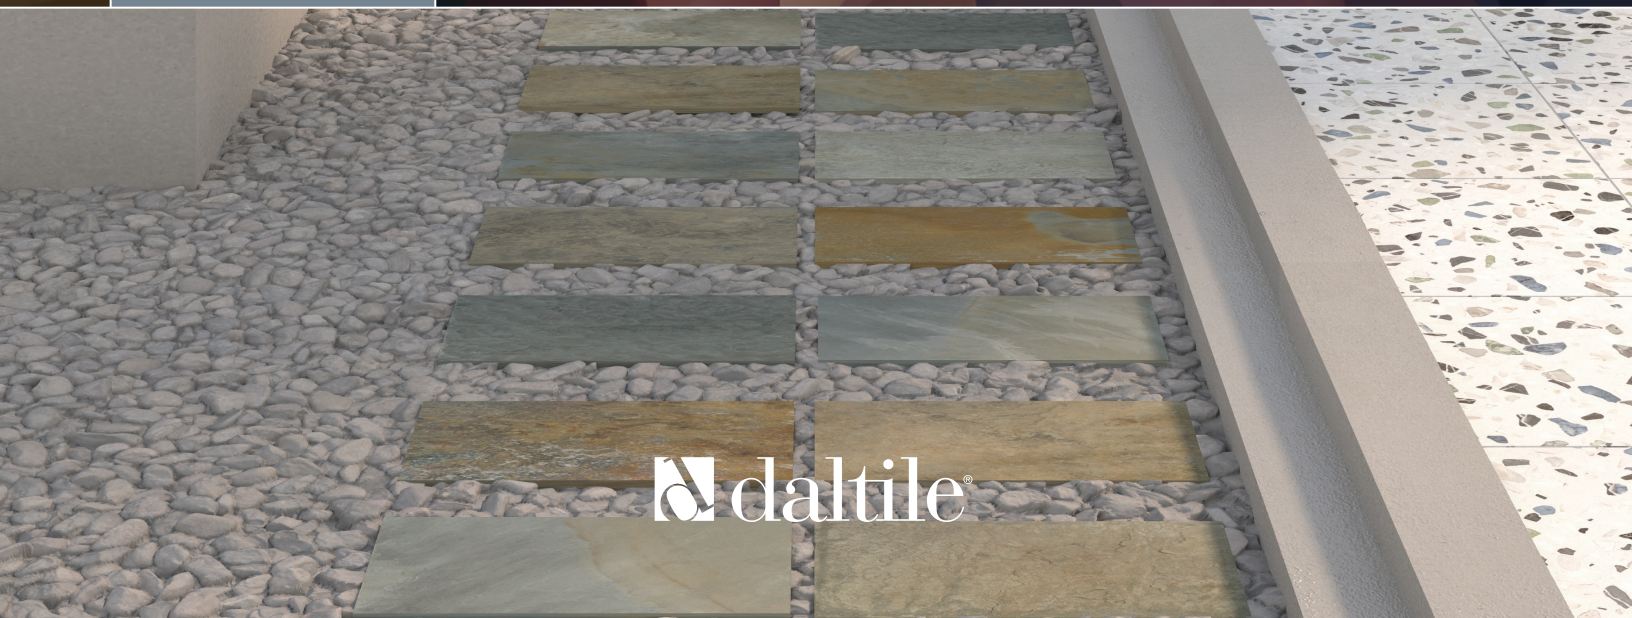

 daltile®

OUTLANDER™

COLORBODY™ PORCELAIN FLOOR TILE WITH STEPWISE™ TECHNOLOGY

Embark on an adventure like no other with our contemporary terrazzo look tile. Rooted in rich art history, Outlander is making its modern debut in an ultra-durable, ColorBody™ porcelain tile, available in today's most popular sizes and four stunning designs: Alto, Grande, Palazzo, and Medio. With the added benefit of our StepWise™ Technology, you can create a seamless design from the indoor to outdoor space.

TERRAZZO LOOK

USAGE



SPECIAL FEATURES



Cover photo features Outlander™ Marine, Grande design 24 x 24 matte on the right patio floor and bottom half of shower & wall, and Marine, Palazzo design 24 x 24 matte on the top half of the shower & wall.

Above photo features Outlander™ Dusk, Grande design 24 x 24 matte on the floor.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



24 x 48
Floor Tile




24 x 24
Floor Tile



12 x 24
Floor Tile

FINISHES: MATTE | SATIN


GRANDE DESIGN




MARINE OU55




MOONLIGHT OU56



STERLING OU57



DUSK OU58



ONYX OU59



ECHO OU54




LUMEN OU53

MEDIO DESIGN




MARINE OU55




MOONLIGHT OU56



STERLING OU57



DUSK OU58



ONYX OU59



ECHO OU54



LUMEN OU53

PALAZZO DESIGN



MARINE OU55



MOONLIGHT OU56



STERLING OU57



DUSK OU58



ONYX OU59



ECHO OU54




LUMEN OU53

ALTO DESIGN



MARINE OU55



DUSK OU58

50% MORE
SLIP RESISTANT
THAN ORDINARY TILE*

*When compared to tile meeting ANSI standards.



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



INDOOR/OUTDOOR



SIMPLECLEAN™







VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

OUTLANDER™

COLORBODY™ PORCELAIN FLOOR TILE WITH STEPWISE™ TECHNOLOGY

TERRAZZO LOOK

SIZES

			Thickness	Finish	Made in U.S.A
	24 x 48 Floor Tile	23-3/8" x 46-15/16" (59.44 cm x 119.20 cm)	5/16"	M S	
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	M S	
	12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M	

Made in the U.S.A. designation is subject to change. Please visit daltile.com for the most current manufacturing information.

M Matte Finish **S** Satin Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic)	
	≥ 0.60 (Floor)	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓*
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.


APPLICATION NOTES :

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.


* Matte finish only.

** 12 x 24 Matte Finish only.

TRIM

Type	Number	Size	Finish
 Bullnose*	P43F9	3 x 24	M S
M Matte Finish	S Satin Finish	*Available in Palazzo design only.	

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0 Matte 6.0 Satin
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	④ All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A1371 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values less than 0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A1371 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



©2026 Daltile (02/26)