



MARBLE LOOK

PANORAMIC DUET™

COLORBODY™ PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC



 daltile®

PANORAMIC DUET™

COLORBODY™ PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC

Panoramic Duet™ brings perfect harmony to your design vision with a tile series crafted to complement the refined beauty of Panoramic Porcelain Surfaces™. Available in multiple standard floor sizes, including expansive large-format options, and a coordinating mosaic, Panoramic Duet extends the aesthetic language of our extra large porcelain slab panels into even more spaces with elegance and ease.

MARBLE LOOK

USAGE



SPECIAL FEATURES

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.



Cover photo features Panoramic Duet™ Calacatta Topaz, 12 x 24 on the floor and 2 x 2 mosaic on the shower floor, and Panoramic Porcelain Surfaces™ Elemental Selection Calacatta Topaz, slab on the tub surround and wall. Above photo features Panoramic Duet™ Diamond Mine, 12 x 24 on the floor and Panoramic Porcelain Surfaces™ Elemental Selection Diamond Mine, slab on the right wall.

SIZES:



48 x 48
Floor Tile



24 x 48
Floor Tile



24 x 24
Floor Tile



12 x 24
Floor Tile



2 x 2
Mosaic

FINISHES: MATTE | POLISHED

COLOR PALETTE




DIAMOND
MINE



CALACATTA
TOPAZ



CALACATTA
ARIES



ANTHRACITE

COLORBODY™ PORCELAIN FLOOR TILE




DIAMOND MINE CM12



CALACATTA TOPAZ CM82




CALACATTA ARIES CM21

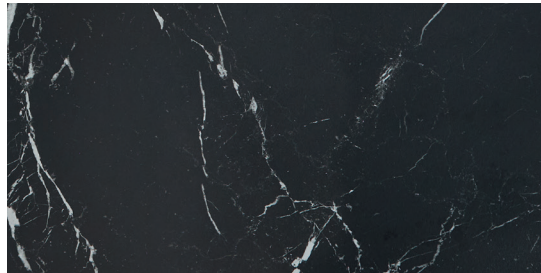

ANTHRACITE CM85

GLAZED CERAMIC 2 x 2 MOSAIC TILE

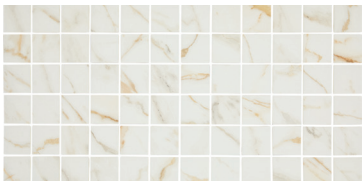


DIAMOND MINE CM12



CALACATTA TOPAZ CM82



CALACATTA ARIES CM21

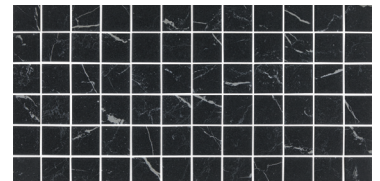

ANTHRACITE CM85



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*



FIRE-RESISTANT*



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

PANORAMIC DUET™

COLORBODY™ PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC

MARBLE LOOK

SIZES

			Thickness	Finish	Made in U.S.A.
	48 x 48 Floor Tile	47-1/8" x 47-1/8" (119.80 cm x 119.80 cm)	3/8"	M P	
	24 x 48 Floor Tile	23-1/2" x 47-1/8" (59.80 cm x 119.80 cm)	3/8"	M P	
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	M P	
	12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M P	
	2 x 2 Mosaic Tile (Dot-mounted)	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	M	

M Matte Finish P Polished Finish

Made in the U.S.A. designation is subject to change. Please visit daltille.com for the most current manufacturing information.

PERFORMANCE CHARACTERISTICS

	ASTM#	Matte Floor Result	Polished Floor Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbf	> 275 lbf	> 250 lbf
Scratch Hardness	C1895	8.0	6.0	4.0-8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors – Standard Center Drain	≥ 0.42	✓**
Shower Floors – Linear Drain	≥ 0.42(Mosaic) ≥ 0.60 (Floor)	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES :

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic tile suitable for exterior application (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Floor and mosaic tile in matte finish only.

** Mosaic tile only.

TRIM

Type	Number	Size	Finish
	Bullnose	P43F9	3 x 24 M P

M Matte Finish P Polished Finish

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern, overlap should not exceed 33%.)	 Medium (V2)*
Mosaic Tile: 1/8"	 High (V3)**

* CM85
** CM12, CM21 and CM82

DURABILITY

Floor Surface Wear Resistance		
1	Residential Bathrooms	③ All Residential / Light Commercial
2	All Residential Areas	④ All Residential / Commercial

*Matte floor tile only

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

 PRE-CONSUMER RECYCLED MATERIALS

 POST-CONSUMER RECYCLED MATERIALS

 MADE IN THE U.S.A.

 REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltille® products and information, visit our website at daltille.com.



©2025 Daltille (09/25)