

MARBLE LOOK

PANORAMIC DUET™

COLORBODY™ PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC TILE



daltile®

PANORAMIC DUET™

COLORBODY™ PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC TILE

Panoramic Duet™ brings perfect harmony to your design vision with a tile series crafted to complement the refined beauty of Panoramic Porcelain Surfaces™. Available in multiple standard floor sizes, including expansive large-format options, and a coordinating mosaic, Panoramic Duet extends the aesthetic language of our extra large porcelain slab panels into even more spaces with elegance and ease.

MARBLE LOOK

USAGE

- FLOOR
- WALL
- COUNTERTOP
- SHOWER FLOOR
- EXTERIOR FLOOR

SPECIAL FEATURES

- STEPWISE™
- TRU-EDGE™
- REVEAL SYNC3D™
- MADE IN THE U.S.A.
- LARGE FORMAT
- MOSAIC/ DECO
- ENCAUSTIC
- TERRAZZO
- PAVER
- CUSTOMIZE

PC CG

LOW HIGH

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

IMAGINE WHAT'S POSSIBLE™ WITH DALTILE DESIGNS

Cover photo features Panoramic Duet™ Elestial, 24 x 48 on the floor, and Panoramic Porcelain Surfaces™ Elemental Selection Elestial, slab on the countertop, backsplash, and vent hood.
Above photo features Panoramic Duet™ Diamond Mine, 12 x 24 on the floor and Panoramic Porcelain Surfaces™ Elemental Selection Diamond Mine, slab on the right wall.

MARBLE LOOK

PANORAMIC DUET™

COLORBODY™ PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC TILE

SIZES:

- 48 x 48 Floor Tile
- 24 x 48 Floor Tile
- 24 x 24 Floor Tile
- 12 x 24 Floor Tile
- 2 x 2 Mosaic

FINISHES: MATTE | POLISHED

COLOR PALETTE

CELESTINE


IRIDESSE


DIAMOND MINE


CALACATTA ARIES


CALACATTA TOPAZ


PRASINA


ELESTIAL


ANTHRACITE

COLORBODY™ PORCELAIN FLOOR TILE

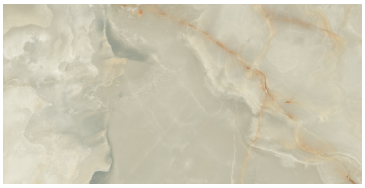

CELESTINE C144

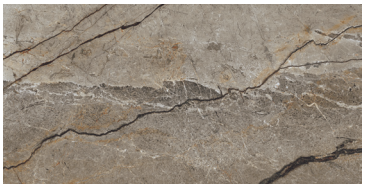
IRIDESSE C147

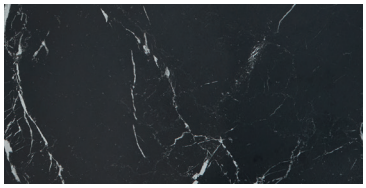

DIAMOND MINE CM12


CALACATTA ARIES CM21

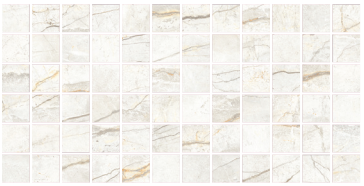

CALACATTA TOPAZ CM82


PRASINA C148

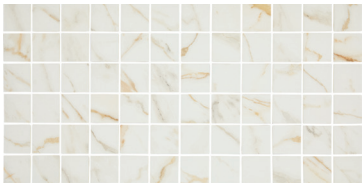

ELESTIAL CM48

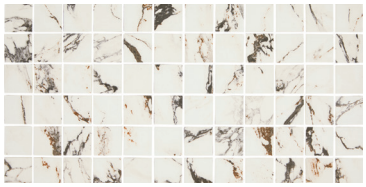

ANTHRACITE CM85

GLAZED CERAMIC 2 x 2 MOSAIC TILE

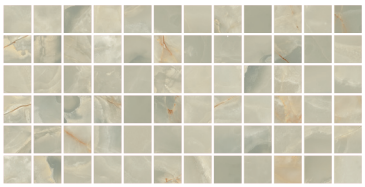

CELESTINE C144

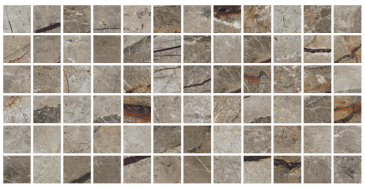

IRIDESSE C147

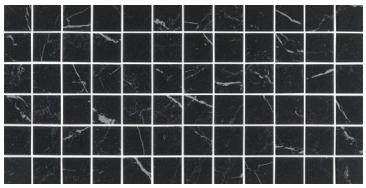

DIAMOND MINE CM12


CALACATTA ARIES CM21


CALACATTA TOPAZ CM82


PRASINA C148


ELESTIAL CM48


ANTHRACITE CM85

SLIP RESISTANT

WATERPROOF

STAINPROOF

DENTPROOF

SCRATCH-RESISTANT†

†Applicable to products with Matte and Textured Finishes

FIRE-RESISTANT†

CLIMATEPRO™

SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DALTILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

MARBLE LOOK

PANORAMIC DUET™

COLORBODY™ PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAIC TILE

SIZES

			Thickness	Finish	Made in U.S.A.
	48 x 48 Floor Tile	47-1/8" x 47-1/8" (119.80 cm x 119.80 cm)	5/16"	M P	
	24 x 48 Floor Tile	23-1/2" x 47-1/8" (59.80 cm x 119.80 cm)	5/16"	M P	
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	M P	
	12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M P	
	2 x 2 Mosaic Tile (Dot-mounted)	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	M	

Made in the U.S.A. designation is subject to change. Please visit daltile.com for the most current manufacturing information.

M Matte Finish P Polished Finish (In colors CM12, CM82, CM21, CM85, C147, C148 only)

PERFORMANCE CHARACTERISTICS

	ASTM#	Matte Floor Result	Polished Floor Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 0.5%	< 3.0%
Breaking Strength	C648	≥ 275 lbf	≥ 275 lbf	≥ 250 lbf
Scratch Hardness	C1895	8.0	6.0	4.0-8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors – Standard Center Drain	≥ 0.42	✓**
Shower Floors – Linear Drain	≥ 0.42(Mosaic) ≥ 0.60 (Floor)	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES :

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic tile suitable for exterior application (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Floor and mosaic tile in matte finish only.

** Mosaic tile only.

TRIM

	Type	Number	Size	Finish
	Bullnose	P43F9	3 x 24	M P

M Matte Finish P Polished Finish

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern, overlap should not exceed 33%.) **Mosaic Tile:** 1/8"	Medium (V2)* High (V3)**

* CM85

** CM12, CM82, CM21, CM48, C144, C147, and C148

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4*	All Residential / Commercial

*Matte floor tile only

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

PRE-CONSUMER RECYCLED MATERIALS

POST-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

CERTIFIED PORCELAIN TILE 0.5% or less water absorption

ZEROTOX

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at **daltile.com.**

daltile®

©2026 Daltile (08/26)