




MARBLE LOOK

PERPETUO™

COLORBODY™ AND GLAZED PORCELAIN FLOOR &
GLAZED CERAMIC WALL TILE AND MOSAIC

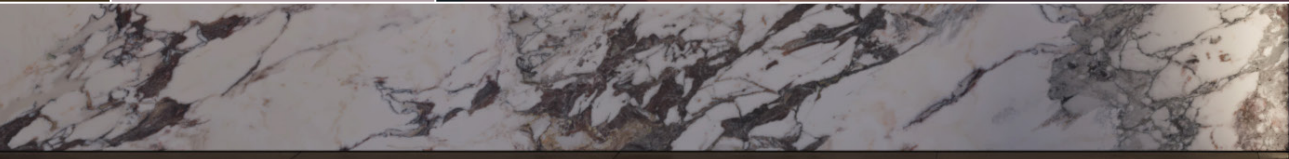

PERPETUO™

COLORBODY™ AND GLAZED PORCELAIN FLOOR &
GLAZED CERAMIC WALL TILE AND MOSAIC

Supreme Splendor

Perpetuo™ delivers the everlasting beauty of marble veining in five neutral yet striking visuals. Design your entire living space with floor tile available in three traditional formats and an 8" hexagon, and wall tile available in multi-geometric, wave and flat structures. Completing this comprehensive collection are two stunning 8" hexagon decorative accents and a hexagon mosaic available in all five colors.

MARBLE
LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



REVEAL
SYNC3D™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



100% BODY
PORCELAIN



GLAZED
PORCELAIN



LOW HIGH

SEE BOTTOM FOR FULL
PRODUCT DETAILS

Cover photo features Perpetuo™ Timeless White, 12 x 24 wave on the wall and Cohesion™ Black, 24 x 24 on the floor and Panoramic Porcelain Surfaces™ Calacatta Aries on the counter top. Above photo features Elegant Beige, 24 x 24 on the floor.

PERPETUO™

MARBLE LOOK

COLORBODY™ AND GLAZED PORCELAIN FLOOR & GLAZED CERAMIC WALL TILE AND MOSAIC

SIZES:



FINISHES: MATTE | SATIN | POLISHED

COLOR PALETTE



BRILLIANT WHITE




TIMELESS WHITE



ELEGANT BEIGE



ETERNAL GREY



INFINITE BLACK

COLORBODY™ PORCELAIN FLOOR TILE



BRILLIANT WHITE PT21



TIMELESS WHITE PT20



ELEGANT BEIGE PT22




ETERNAL GREY PT23



INFINITE BLACK PT24


GLAZED PORCELAIN 8" HEXAGON FLOOR TILE




BRILLIANT WHITE PT21




TIMELESS WHITE PT20



ELEGANT BEIGE PT22




ETERNAL GREY PT23



INFINITE BLACK PT24

GLAZED PORCELAIN 8" HEXAGON DECORATIVE ACCENT



TUXEDO PT26



BRIDAL PT25



SLIP RESISTANT*



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*

*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*




CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.


GLAZED CERAMIC WALL TILE – FLAT



BRILLIANT WHITE PT21



TIMELESS WHITE PT20



ELEGANT BEIGE PT22




ETERNAL GREY PT23


12 x 24 GLAZED CERAMIC WALL TILE – MULTI-GEOMETRIC



BRILLIANT WHITE PT21

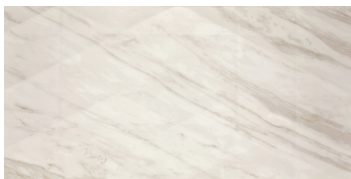

TIMELESS WHITE PT20



ELEGANT BEIGE PT22



ETERNAL GREY PT23

12 x 24 GLAZED CERAMIC WALL TILE – WAVE




BRILLIANT WHITE PT21



TIMELESS WHITE PT20



ELEGANT BEIGE PT22

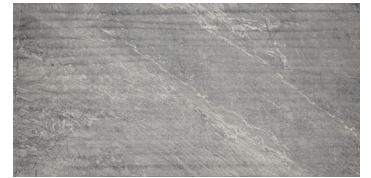

ETERNAL GREY PT23


1-1/2" GLAZED CERAMIC HEXAGON MOSAIC



BRILLIANT WHITE PT21




TIMELESS WHITE PT20



ELEGANT BEIGE PT22



ETERNAL GREY PT23
















INFINITE BLACK PT24

PERPETUO™

COLORBODY™ AND GLAZED PORCELAIN FLOOR & GLAZED CERAMIC WALL TILE AND MOSAIC

MARBLE LOOK

SIZES

			Thickness	Finish	Made in U.S.A.
	24 x 24 Floor Tile*	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	M P	
	12 x 24 Floor Tile*	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M P	
	12 x 12 Floor Tile*	11-5/8" x 11-5/8" (29.56 cm x 29.56 cm)	5/16"	M P	
	8" Hexagon Floor Tile	7-7/8" x 9-1/16" (19.95 cm x 23.04 cm)	5/16"	M	
	8" Hexagon Decorative Accent	7-7/8" x 9-1/16" (19.95 cm x 23.04 cm)	5/16"	M	
	12 x 24 Flat Wall Tile*	11-3/4" x 23-3/4" (29.90 cm x 60.42 cm)	3/8"	S	
	12 x 24 Wave Wall Tile*	11-3/4" x 23-3/4" (29.90 cm x 60.42 cm)	3/8"	S	
	12 x 24 Multi-Geometric Wall Tile*	11-3/4" x 23-3/4" (29.90 cm x 60.42 cm)	3/8"	S	
	4 x 12 Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"	S	
	1-1/2" Hexagon Mosaic Tile (Dot-mounted)	11-3/8" x 10-1/4" Sheet (28.89 cm x 26.04 cm Sheet)	1/4"	M	

M Matte Finish **P** Polished Finish **S** Satin Finish

* Features TruEdge™ Technology.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓ ¹
Wet & Level – Interior Floor	≥ 0.42	✓ ^{1*}
Shower Floors – Standard Center Drain	≥ 0.42	✓ ^{**}
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	✓ ^{**}
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓ ¹
Pool Linings	N/A	✓ ^{**}

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Wall and mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

¹ Floor and Mosaic tile only. * Matte finish only. ** Mosaic tile only.

 **PRE-CONSUMER RECYCLED MATERIALS**

 **POST-CONSUMER RECYCLED MATERIALS**

 **REVEAL IMAGING®**



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

 **CERTIFIED PORCELAIN TILE**
0.0% or less water absorption

 **GREEN BUILDING SOURCE MEMBER**

 **ZEROTOX**

TRIM

Type	Number	Size	Finish
 Floor Bullnose	P43F9	3 x 24	M
 Jolly	S1/212J	1/2 x 12	S

M Matte Finish **S** Satin Finish (Available in PT20, PT21, PT22, PT23 only)

INSTALLATION

Grout Joint Recommendation

Shade Variation

Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)

12 x 24 Wall Tile: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)

 Random (V4)

4 x 12 Wall Tile: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)

8" Hex Floor Tile: 3/16"

Mosaic Tile: 1/8"

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbf	120-230 lbf	> 250 lbf
Scratch Hardness	C1895	8.0 (Matte) 6.0 (Polished)	4.0 - 6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A1371 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A1371 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

 **daltile®**
IMAGINE WHAT'S POSSIBLE™

©2025 Daltile (04/25)