

8 mm | 20 mil
MONTERRO™
RIGID CLICK

PROSERIES™
LUXURY VINYL FLOORING
daltile



SuperGuardX™
REINFORCED SHIELD

UNICLIC®
PATENTED TECHNOLOGY

8 mm | 20 mil

MONTERRO™

RIGID CLICK

A study in quiet luxury, Monterro™ brings understated refinement to any interior. Featuring a sleek 9" x 60" plank and coordinating 5" x 24" herringbone plank, this collection makes it easy to create layouts that feel timeless and intentional. Four thoughtfully curated colors and a next-generation Wood Polymer Composite core to deliver the beauty of natural wood visuals with exceptional comfort underfoot. The result is effortless elegance, crafted for everyday living and lasting performance.

CONTEMPORARY STYLE

- 9" x 60" Plank and 5" x 24" Herringbone Plank
- Four contemporary colors curated for versatile interiors
- Embossed in Register surface for a realistic wood look and feel
- Waterproof Polymer Composite Rigid Click construction
- 8.0 mm thickness

NEXT GEN PERFORMANCE

- 20 mil wear layer for increased foot traffic
- SuperGuardX™ Technology for increased durability
- 100% Waterproof
- 100% Virgin Vinyl construction



Cover photo features Bosco, 5 x 24 Herringbone on the floor.
Above photo features Alps, 9 x 60 on the floor.

8 mm | 20 mil
MONTERRO™
RIGID CLICK

SIZES:



9 x 60
Plank



5 x 24
HerringbonePlanks™

9 x 60 WOOD LOOK PLANKS (SHOWN IN GRID)




ALPS MO50



CASSETTA MO51



RIONE MO52

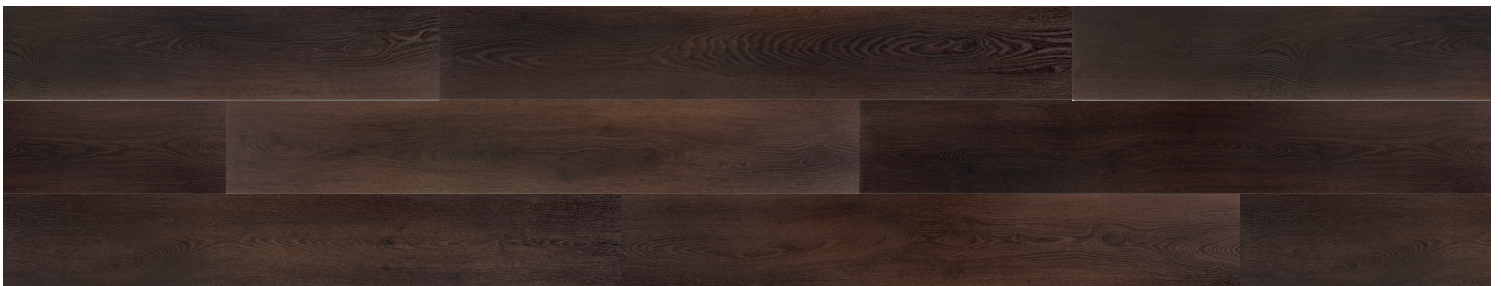

BOSCO MO53

8 mm | 20 mil
MONTERRO™
RIGID CLICK

SIZES:



9 x 60
Plank



5 x 24
HerringbonePlanks

5 x 24 HERRINGBONE WOOD LOOK PLANKS




ALPS MO50



CASSETTA MO51



RIONE MO52

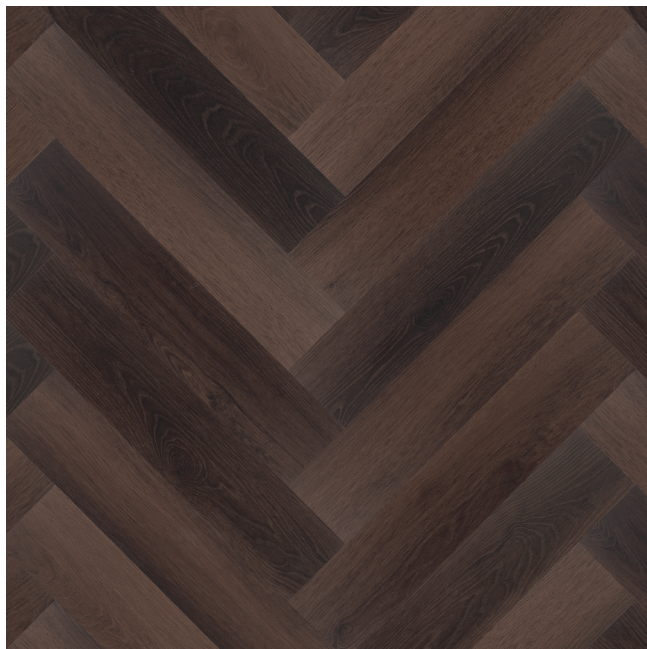

BOSCO MO53

8 mm | 20 mil
MONTERRO™
RIGID CLICK



NOISE REDUCING



EASY TO CLEAN



100% WATERPROOF



100% VIRGIN VINYL

SPECIFICATIONS 9" W x 60" L

Product Type:	Waterproof Polymer Composite Rigid Click LVF
Installation:	Rigid Click
Thickness:	8 mm
Wear Layer:	20 mil (0.508 mm)
Finish:	SuperGuardX™ Technology
Size:	9" W x 60" L Plank
Underlayment:	Pad Attached; 1.0 mm IXPE
Bevel:	Pressed Bevel
Embossing:	Embossed in Register EIR
Plank Variation:	8 Unique Planks
Sq. Ft./Carton:	22.14
Pieces/Carton:	6
Weight:	6.75 lbs per pc/ 40.50 lbs per carton
Warranty:	Limited Lifetime Residential Warranty Limited 15 Year Multifamily Warranty Limited 15 Year Light Commercial Warranty Limited 15 Year Commercial Warranty

5" W x 24" L Herringbone Plank

Product Type:	Waterproof Polymer Composite Rigid Click LVF
Installation:	Rigid Click
Thickness:	8 mm
Wear Layer:	20 mil (0.508 mm)
Finish:	SuperGuardX™ Technology
Size:	5" W x 24" L Herringbone Plank
Underlayment:	Pad Attached; 1.0 mm IXPE
Bevel:	Pressed Bevel
Embossing:	Embossed in Register EIR
Plank Variation:	24 Unique Planks
Sq. Ft./Carton:	18.72
Pieces/Carton:	24
Weight:	1.43 lbs per pc/ 34.32 lbs per carton
Warranty:	Limited Lifetime Residential Warranty Limited 15 Year Multifamily Warranty Limited 15 Year Light Commercial Warranty Limited 15 Year Commercial Warranty

Installation Advisory: Monterro™ click LVF uses Uniclic® Locking System, no adhesive required.
See daltille.com/LVF for more recommended installation information.

Transitions: Click LVF transitions are offered in a Slim Trim 4-in-1 Transition, Extra Tall Stair Nose, Full Round Stair Tread, Round Stair Nose, Quarter Round, and Slim Cap. See daltille.com/LVF for more information.

Stocking Platform: 8 mm | 20 mil

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700 - Class III, Type B Embossed
Squareness:	ASTM F2421 - Passes - $\pm 0.010"$ max
Size and Tolerance:	ASTM F2421 - Passes - Plank Length > 48 in. ± 0.060 in.
Thickness:	ASTM F386 - Passes - ± 0.008 inches
Dimensional Stability:	ASTM F2199 - Passes - Residential 0.25% & Commercial 0.20% avg. 0.080 in.
Static Load Limit:	ASTM F970 - Passes - Average ≤ 0.005 in.
Residual Indentation:	ASTM F1914 - Passes - $\leq 8\%$
Resistance To Chemicals:	ASTM F925 - Passes - No more than a slight change
Resistance To Light:	ASTM F1515 - Passes - $\Delta E < 8.0$
Resistance To Heat:	ASTM F1514 - Passes - Average $\Delta E < 8.0$
Critical Radiant Flux:	ASTM E648 - Passes - Class 1 (>0.45 W/cm ²)
Smoke Density:	ASTM E662 - Part A - Passes - <450

NOTES

See daltille.com/LVF for recommended installation and care guidelines.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltille® products and information,
visit our website at daltille.com/LVF

PROSERIES™
LUXURY VINYL FLOORING



©2026 Dal-Tile, LLC (09/26)

COORDINATING TRIM

Six trims and moldings that are designed to coordinate with each of our existing colors within the collection.

STOCKING ITEMS:

EXTSN: Extra Tall Stair Nose (2" x 94")

SLMT: Slim Trim 4-in-1 Transition (2" x 94"), Four unique trims and moldings in one single SKU (T-Molding, Hard Surface Reducer, Carpet Transition, End Cap)


RNDSTRD: Full Round Stair Tread (12-1/5" x 50")

VRDSN: Round Stair Nose (1-3/4" x 94")

VQRND: Quarter Round (3/4" x 94")

VSLCAP: Slim Cap, Low Profile End Cap (1-3/8" x 94")

STOCKING ITEMS:

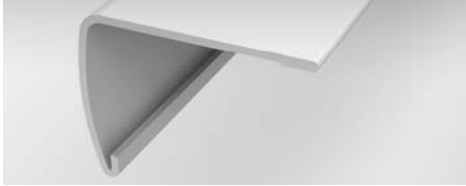


EXTRA TALL STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*



SLIM TRIM 4-IN-1 TRANSITION

Performance Accessories' exclusive 4-in-1 transition allows you to utilize a single transition for four different applications.

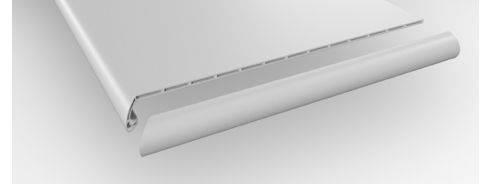

FULL ROUND STAIR TREAD

A vinyl stair tread with pre-attached stair nosing. Can be used on steps with or without nosing.

EACH OF THE BELOW ARE ACHIEVED VIA THE SLIM TRIM 4-IN-1 TRANSITION (SHOWN ABOVE)



T-MOLDING

Used to transition between flooring of equal heights and in doorways.



HARD SURFACE REDUCER

Connects two floors of different heights.




END MOLDING

Finishing up to a threshold, sliding door, etc.




CARPET TRANSITION

Provides a smooth transition between your hard surface floor & carpet. A carpet tap down trim must be used & is sold at your local hardware store.

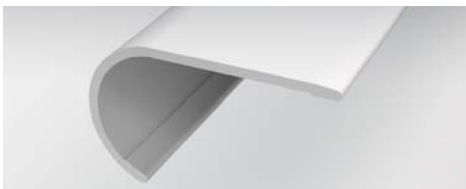

ROUND STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*

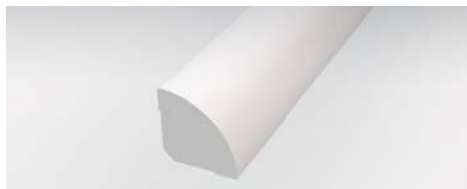

QUARTER ROUND

Conceals the expansion space between the wall and the flooring.



SLIM CAP

Low profile end cap used to transition from flooring to carpet, masonry, sliding doors, and other exterior door jambs.



* References to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

