

5.0mm | 20 mil

MULTIMEDIA™ TERRAZZO

FLEXIBLE GLUE DOWN

PROSERIES™
VITACORE RESILIENT FLOORING

 daltile



 VitaCore™
PVC FREE


TitanGuard™

5.0mm | 20 mil

MULTIMEDIA™ TERRAZZO

FLEXIBLE GLUE DOWN

Multimedia Terrazzo offers the unique beauty of terrazzo and a one-of-a-kind aesthetic to glue down resilient flooring. Its contemporary palette of tonal blends and organic flecking delivers visual impact and subtle texture; perfect for a bold aesthetic with effortless installation. Experience Multimedia Terrazzo, one of the many creative expressions waiting to be explored within the Multimedia Collection.

BOLD & SUSTAINABLE

- Constructed using Vitacore™, an innovative PVC-free material made from recycled content
- 20 mil wear layer for heavy commercial applications
- Embossed
- TitanGuard™ Technology
- 100% Waterproof



Cover photo features Multimedia™ Terrazzo Lake, 18 x 18 on the inner floor and Multimedia™ Concrete Chai, 18 x 18 on the outer floor.
Above photo features Multimedia™ Terrazzo Delta, 18 x 36 on the floor.

5.0mm | 20 mil
MULTIMEDIA™ TERRAZZO
FLEXIBLE GLUE DOWN

SIZES:




18 x 36
Floor




18 x 18
Floor

18 x 36 FLOOR SIZE

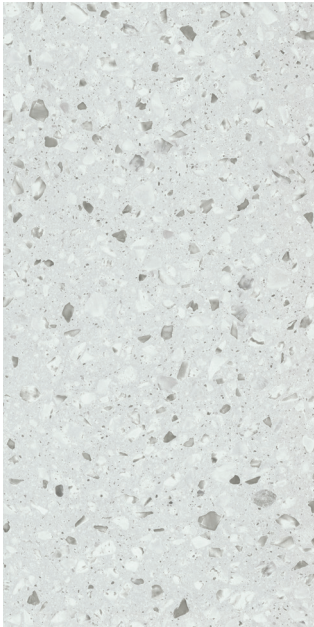


STREAM MZ31

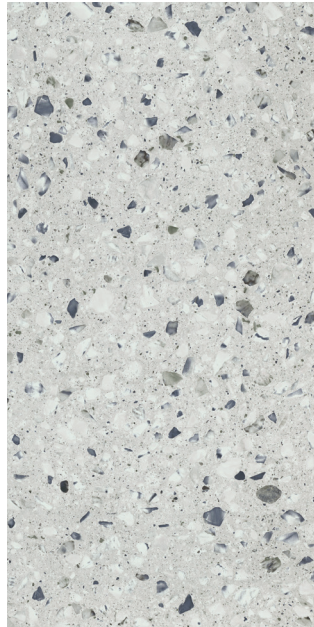

LAKE MZ33




RIVER MZ30

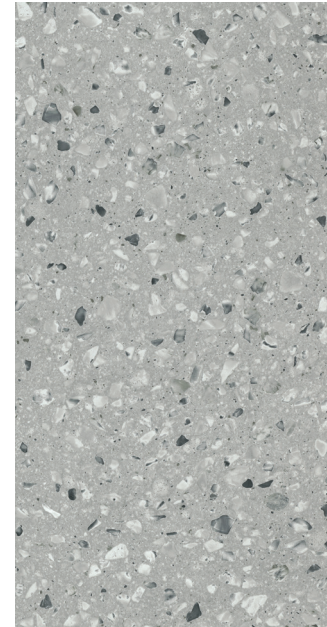


DELTA MZ32


18 x 18 FLOOR SIZE




STREAM MZ31



LAKE MZ33



RIVER MZ30



DELTA MZ32

5.0mm | 20mil

MULTIMEDIA™ TERRAZZO

FLEXIBLE GLUE DOWN



NOISE REDUCING



EASY TO CLEAN



100% WATERPROOF

SPECIFICATIONS

18" x 18"

18" x 36"

Product Type:	Resilient Flooring Dry Back	Resilient Flooring Dry Back
Installation:	Glue Down	Glue Down
Thickness:	5.0 mm	5.0 mm
Wear Layer:	20 Mil (0.508)	20 Mil (0.508)
Finish:	TitanGuard™ Technology	TitanGuard™ Technology
Size:	18" W x 18" L	18" W x 36" L
Underlayment:	N/A	N/A
Bevel:	Beveled	Beveled
Embossing:	Embossed	Embossed
Plank Variation:	6 pcs / 13.5 SF	3 pcs / 13.5 SF
Sq. Ft./Carton:	27	27
Pieces/Carton:	12 pcs / carton	6 pcs / carton
Weight	4.4 lbs per pc / 52.80 lbs per carton	8.8 lbs per pc / 52.80 lbs per carton
Warranty:	Limited Lifetime Residential Warranty Limited 30 Year Multifamily Warranty Limited 30 Year Light Commercial Warranty Limited 20 Year Commercial Warranty Limited 10 Year Heavy Commercial Warranty	Limited Lifetime Residential Warranty Limited 30 Year Multifamily Warranty Limited 30 Year Light Commercial Warranty Limited 20 Year Commercial Warranty Limited 10 Year Heavy Commercial Warranty
Installation Advisory:	Glue Down Resilient Flooring must be installed using Daltile's recommended adhesives. See daltile.com/multimedia-collection for more information.	
Stocking Platform:	5.0 mm 20 mil	
Special order Platform:	Additional platforms available on special order. Minimum quantities apply. Contact your Daltile representative for additional information.	

PERFORMANCE & CHARACTERISTICS

Construction:	PVC Free Resilient Flooring
Classification:	ASTM F1700 - Class III, Type B Embossed
Squareness:	ASTM F2421 - Passes - ± 0.010" max
Size and Tolerance:	ASTM F2421 - Passes - ± 0.024 in.
Thickness:	ASTM 386/387 - Passes - ± 0.199 in.
Flexibility:	ASTM F137 - Passes - 1" mandrel, no crack or break
Dimensional Stability:	ASTM F2199 - Passes - L: -0.007 W: -0.006
Static Load Limit:	ASTM F970 - Passes - Average = 0.003 in.
Residual Indentation:	ASTM F1914 - Passes - 4.76%
Resistance To Chemicals:	ASTM F925 - Passes - No change observed
Resistance To Light:	ASTM F1515 - Passes - ΔE < 8.0
Resistance To Heat:	ASTM F1514 - Passes - Average ΔE < 8.0
Critical Radiant Flux:	ASTM E648 - Passes - Class 1 (> 0.45w/cm2)
Smoke Density:	ASTM E662 - Part A - Passes - <450 W/cm2

NOTES

See daltile.com for recommended installation and care guidelines.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com



©2026 Dal-Tile, LLC (06/26)