



MONOCHROMATIC
LOOK

PURE
COLORBODY™ PORCELAIN



 daltile®
IMAGINE WHAT'S POSSIBLE™

PURE

COLORBODY™ PORCELAIN

Pure is the epitome of timelessness, fused with a modern spin. Pair the dual shades of Frost White and Black to create a classic checkerboard design, or take the minimalist approach with one of the monochromatic colors. This durable ColorBody™ porcelain tile is offered in both matte and polished finishes, and is available in popular TruEdge™ rectified sizes, 12 x 12, 12 x 24 & 24 x 24. Pure is the sophisticated choice for any space.

MONOCHROMATIC LOOK

USAGE



SPECIAL FEATURES



Cover photo features Frost White and Black 24 x 24 on the floor and Black 12 x 12 on the wall.

Above photo features Frost White and Black 24 x 24 on the floor.

SEE CHARTS FOR FULL PRODUCT DETAILS.

MONOCHROMATIC LOOK

PURE

COLORBODY™ PORCELAIN

SIZES:



24 x 24
Floor Tile




12 x 24
Floor Tile




12 x 12
Floor Tile

FINISHES: MATTE | POLISHED

FLOOR TILE

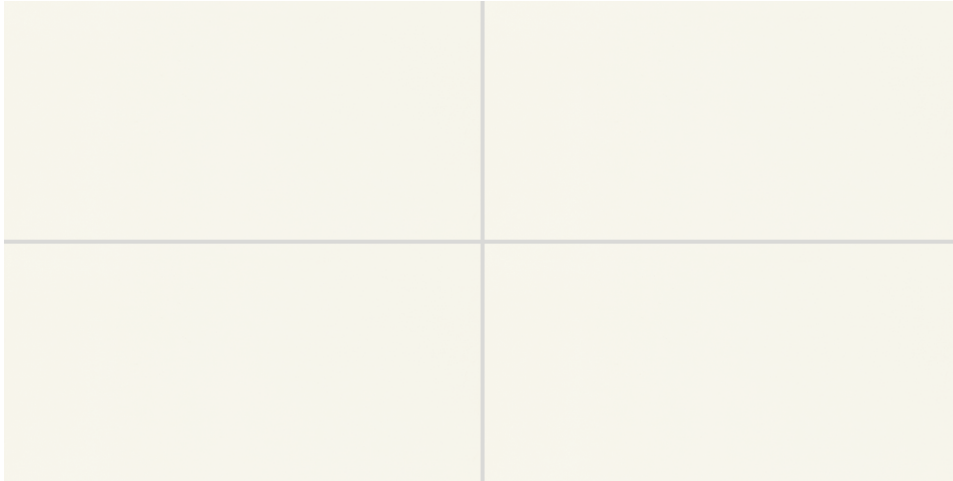

FROST WHITE PU20

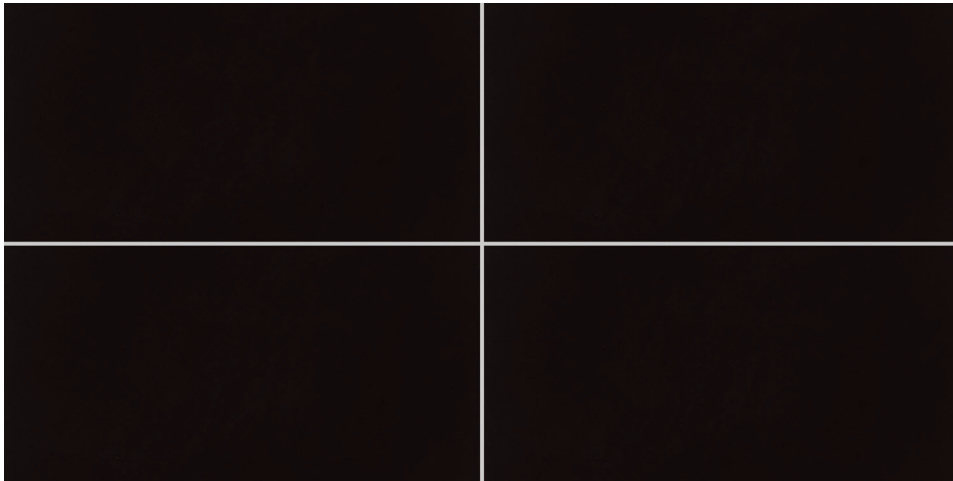

BLACK PU21



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*

*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

Table with 5 columns: Tile Type, Size, Dimensions, Thickness, and Finish. Rows include 24 x 24 Floor Tile, 12 x 24 Floor Tile, and 12 x 12 Floor Tile.

M Matte Finish P Polished Finish

APPLICATIONS

Table with 3 columns: Application, Target DCOF wet, and Suitable. Rows include Dry & Level - Interior Floor, Wet & Level - Interior Floor, Shower Floors, Exterior Floor Applications, Ramps & Inclines, Walls/Backsplashes, Countertops, and Pool Linings.

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Matte finish only.

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.



TRIM

Table with 5 columns: Type, Number, Size, and Finish. Row includes Bullnose trim with P43C9 number and 3 x 12 size.

M Matte Finish

INSTALLATION

Table with 2 columns: Grout Joint Recommendation and Shade Variation. Includes text about installation and a Medium (V2) shade variation icon.

PERFORMANCE CHARACTERISTICS

Table with 3 columns: ASTM#, Result. Rows include Water Absorption, Breaking Strength, Scratch Hardness, and Chemical Resistance.

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

Table with 2 columns: Location and Rating. Rows include Residential Bathrooms and All Residential Areas.

* Polished Finish Only.
** Matte Finish Only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltille® products and information,
visit our website at daltille.com.

