



WALL

RETROSPACE™ REMIX
GLAZED CERAMIC



 **dalTile**®
IMAGINE WHAT'S POSSIBLE™

RETROSPACE™ REMIX

GLAZED CERAMIC

Mid-Century Modern Essentials

Reinvent the acclaimed look of mid-century modern design with RetroSpace™ Remix. A modern interpretation of a nostalgic aesthetic, this translucent-glazed wall tile beautifully reflects light in your space. A subtle undulated surface is the foundation of this artisan wall tile available in soft green and blue hues as well as a neutral color palette. RetroSpace™ Remix is offered in three wall tile sizes to achieve your one-of-a-kind feature walls or backsplashes.

• SOFT REFLECTIONS

- Subtle, minimalist wall tile with an enriching, translucent glaze
- Combine shapes and colors to create unique, personalized wall designs

• DIMENSIONAL SURFACE

- Soft green and blue tones offered along with traditional neutral colors
- Three wall tile sizes with a coordinating jolly

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



CGLAZED CERAMIC



LOW HIGH

SPECIAL FEATURES

Cover photo features RetroSpace™ Remix Modern White 3 x 6 tile on the wall.

Above photo features RetroSpace™ Remix Succulent Green 6 x 6 hex on the backsplash with ONE Quartz™ Nature Flecks Kodiak Quartz on the countertop.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



FINISHES: GLOSSY

COLOR PALETTE



3 x 6 WALL TILE



6 x 6 WALL TILE



6 x 6 HEXAGON WALL TILE



STAINPROOF



DENTPROOF




SIMPLICLEAN™

RETROSPACE™ REMIX

GLAZED CERAMIC

WALL

1/2 x 12 JOLLY

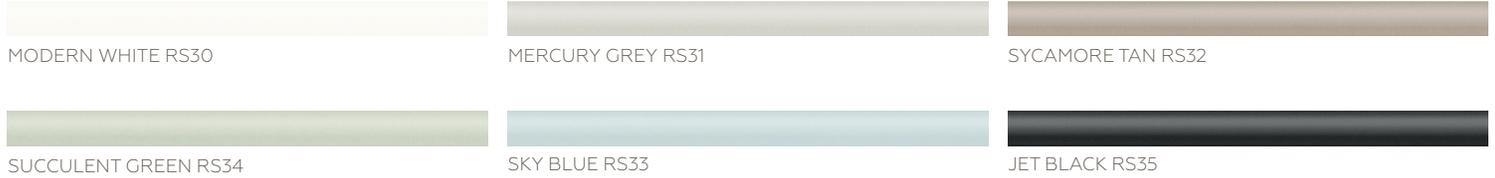

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	6 x 6 Wall Tile	(5-7/8" x 5-7/8") (15.00 cm x 15.00 cm)	5/16" (8.5 mm)	5.32	22
	6 x 6 Hexagon Wall Tile	(5-7/8" x 5-7/8") (15.00 cm x 15.00 cm)	5/16" (8.5 mm)	4.90	22
	3 x 6 Wall Tile	(2-15/16" x 5-7/8") (7.50 cm x 15.00 cm)	5/16" (8.5 mm)	5.32	44

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

TRIM

	Type	Number	Size	Pieces/ Carton
	12" Jolly	S1/212J	1/2 x 12	20

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.