

2mm | 12 mil & 3mm | 20 mil
ASHER BEND™
FLEXIBLE GLUE DOWN

PROSERIES™
LUXURY VINYL FLOORING
daltilo



SuperGuardX™
REINFORCED SHIELD

2mm | 12 mil & 3mm | 20 mil
ASHER BEND™
FLEXIBLE GLUE DOWN

Asher Bend™ continues to introduce comfort and style - now available in a Flexible Glue Down option. The earthy color palette, natural hardwood visual, and extra-long 9 x 71 plank create a luxurious environment and a seamless installation.

REFINED DESIGN

- 9" x 71" wood look planks
- Earthy color palette
- Embossed in Register surface for realistic look and feel
- Microbevel for realistic wood look and feel
- 2 mm thickness with 12 mil wear layer
- 3 mm thickness with 20 mil wear layer

PREMIUM PERFORMANCE

- SuperGuardX™ Technology
- 100% Waterproof
- 100% Virgin Vinyl



Cover and above photos feature Asher Bend™ Hearth 9 x 71 plank on the floor.

2mm | 12 mil & 3mm | 20 mil
ASHER BEND™
FLEXIBLE GLUE DOWN

SIZES:

9 x 71 Plank

9 x 71 WOOD LOOK PLANKS



PICKET FENCE AB21



VILLA AB22



HEARTH AB23



MANOR AB24



LODGE AB25

2mm | 12 mil & 3mm | 20 mil
ASHER BEND™
 FLEXIBLE GLUE DOWN



NOISE REDUCING



EASY TO CLEAN



100% WATERPROOF



100% VIRGIN VINYL

SPECIFICATIONS 2.0 mm | 12 mil

Product Type:	LVF Dry Back
Installation:	Glue Down
Thickness:	2.0 mm
Wear Layer:	12 mil (0.3048 mm)
Finish:	SuperGuard X™ Technology
Size:	9" W x 71" L Plank
Underlayment:	N/A
Bevel:	Micro Bevel
Embossing:	Embossed in Register EIR
Plank Variation:	8 Unique Planks
Sq. Ft./Carton:	53.01
Pieces/Carton:	12
Weight:	3.44 lbs per pc / 41.31 lbs per carton
Warranty:	Limited 25 Year Residential Warranty Limited 10 Year Multifamily Warranty Limited 7 Year Light Commercial Warranty

3.0 mm | 20 mil

Product Type:	LVF Dry Back
Installation:	Glue Down
Thickness:	3.0 mm
Wear Layer:	20 mil (0.508mm)
Finish:	SuperGuard X™ Technology
Size:	9" W x 71" L Plank
Underlayment:	N/A
Bevel:	Micro Bevel
Embossing:	Embossed in Register EIR
Plank Variation:	8 Unique Planks
Sq. Ft./Carton:	35.34
Pieces/Carton:	8
Weight:	5.16 lbs per pc / 41.31 lbs per carton
Warranty:	Limited Lifetime Residential Warranty Limited 15 Year Multifamily Warranty Limited 15 Year Light Commercial Warranty Limited 15 Year Commercial Warranty

Installation Advisory: Glue Down LVF must be installed using ProSeries™ Adhesive by Daltile. See daltile.com/LVF for more information.

Stocking Platform: 2 mm | 12 mil, 3 mm | 20 mil

Special Order Platform: Additional Platforms available on special order. Minimum order quantities apply. Contact your Daltile representative for additional information.


Transitions: Transitions are offered in a Slim Trim 4-in-1 Transition, Extra Tall Stair Nose, and Full Round Stair Tread

* Special Order Transitions: Round Stair Nose, Quarter Round, and Slim Cap

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700 - Class III, Type B Embossed
Squareness:	ASTM F2055 - Passes - ± 0.010" max
Size and Tolerance:	ASTM F2055 - Passes - Plank Length ≤ 71 in. ± 0.094 in. (2.39 mm)
Thickness:	ASTM F386 - Passes - Nominal = ± 0.005 in.
Flexibility:	ASTM F137 - Passes - 1" mandrel
Dimensional Stability:	Passes Residential & Commercial - Res 0.25 % / (0.080 in.) avg max. Comm 0.20 % / (0.080 in.) avg. max.
Static Load Limit:	ASTM F970- Passes, Test to Limit (+ 0.005")
Residual Indentation:	ASTM F1914 - Passes - ≤ 8%
Resistance To Chemicals:	ASTM F925 - Passes - No more than a slight change
Resistance To Light:	ASTM F1515 - Passes - ΔE < 8.0
Resistance To Heat:	ASTM F1514 - Passes - Average ΔE < 8.0

INSTALLATION OPTIONS

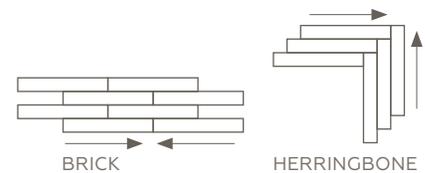

NOTES

See daltile.com/LVF for recommended installation and care guidelines.



7834 C.F. Hawn Freeway,
 Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com/LVF

PROSERIES™
 LUXURY VINYL FLOORING




©2024 Dal-Tile, LLC (3/24)

Six trims and moldings that are designed to coordinate with each of our existing colors within the collection.

- | | |
|---|--|
| VRDSN: Round Stair Nose (1-3/4" x 94") | EXTSN: Extra Tall Stair Nose (2" x 94") |
| VQRND: Quarter Round (3/4" x 94") | RNDSTRD: Full Round Stair Tread (12-1/5" x 50") |
| VSLCAP: Slim Cap, Low Profile End Cap (1-3/8" x 94") | SLIMT: Slim Trim 4-in-1 Transition (2" x 94"), Four unique trims and moldings in one single SKU (T-Molding, Hard Surface Reducer, Carpet Transition, End Cap) |

STOCKING ITEMS

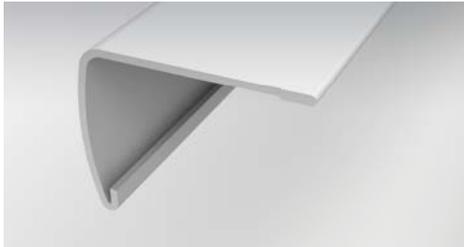


Extra Tall Stair Nose

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*



Slim Trim 4-in-1 Transition


Performance Accessories' exclusive 4-in-1 transition allows you to utilize a single transition for four different applications.

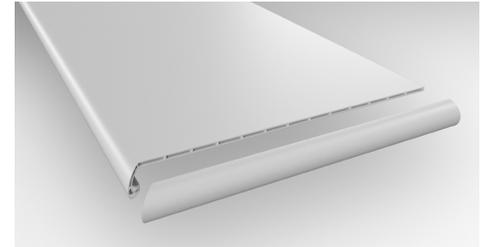

Full Round Stair Tread


A vinyl stair tread with pre-attached stair nosing. Can be used on steps with or without nosing.

EACH OF THE BELOW ARE ACHIEVED VIA THE SLIM TRIM 4-IN-1 TRANSITION (SHOWN ABOVE)



T-Molding

Used to transition between flooring of equal heights and in doorways.



Hard Surface Reducer

Connects two floors of different heights.



End Molding

Finishing up to a threshold, sliding door, etc.



Carpet Transition

Provides a smooth transition between your hard surface floor & carpet. A carpet tap down trim must be used & is sold at your local hardware store.

SPECIAL ORDER ITEMS:



Round Stair Nose

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*



Quarter Round

Conceals the expansion space between the wall and the flooring.



Slim Cap

Low profile end cap used to transition from flooring to carpet, masonry, sliding doors, and other exterior door jambs.



*References to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminated, the underlayment, either attached or loose lay and any additional vapor barriers.