

6.0 mm | 20 Mil

BELLAMY PLACE™

RIGID CLICK

PROSERIES™

LUXURY VINYL FLOORING

 daltile



SuperGuard™
REINFORCED SHIELD

UNICLIC®
PATENTED TECHNOLOGY

6.0 mm | 20 Mil

BELAMY PLACE™

RIGID CLICK

AUTHENTIC BEAUTY

Bellamy Place™ offers the authenticity of real wood with the ease and confidence of luxury vinyl flooring. European-inspired design matched with the premier Embossed in Register technique create tight realistic grooves – luxury that you can feel. Indulge in a rich color palette that is curated to elevate any space and thoughtfully designed to withstand the test of trends. Bellamy Place™ introduces an extra-long 9" x 60" wood plank and features our patented Uniclic® locking mechanism for quick installation.

ELEGANT DESIGN

- 9" x 60" wood look planks
- Cool to warm tone color palette
- Multi-layer SPC rigid core with Uniclic® Locking System
- Embossed in Register surface for realistic look and feel
- Painted bevel for realistic wood look and feel
- 6.0 mm Thickness


BUILT TO LAST

- SuperGuard™ Technology
- 20 Mil wear layer for heavy foot traffic
- 100% Waterproof
- 100% Virgin Vinyl



Cover photo features Bellamy Place™ Acre 9 x 60 plank.
Above photo features Bellamy Place™ Barrel 9 x 60 plank.

SIZES:



9 x 60 WOOD LOOK PLANKS



WHITELOCK BP10



GARDEN BP11



COURTYARD BP12



ACRE BP13



SADDLE BP14



BARREL BP15

6.0 mm | 20 Mil

BELLAMY PLACE™

RIGID CLICK



NOISE REDUCING



EASY TO CLEAN



100% WATERPROOF



100% VIRGIN VINYL

SPECIFICATIONS

Product Type:	SPC Rigid Core LVF
Installation:	Rigid Click
Thickness:	6.0 mm
Wear Layer:	20 Mil (0.508 mm)
Finish:	SuperGuard™ Technology
Size:	9" W x 60" L Plank
Underlayment:	Pad Attached; 1.0 mm IXPE
Bevel:	Painted Bevel
Embossing:	Embossed in Register EIR
Plank Variation:	4 Unique Planks
Sq. Ft./Carton:	22.38
Pieces/Carton:	6
Weight:	7.9 lbs per pc / 47.40 lbs per carton
Warranty:	Limited Lifetime Residential Warranty Limited 15 Year Multifamily Warranty Limited 15 Year Light Commercial Warranty Limited 15 Year Commercial Warranty
Installation Advisory:	Bellamy Place™ click LVF uses Uniclic® Locking System; no adhesive required. See daltile.com/LVF for more recommended installation information.
Stocking Platform:	6 mm, 20 mil
Special Order Platform:	Additional Platforms available on special order. Minimum quantities apply. Contact your Daltile representative for additional information
Transitions:	Click LVF transitions are offered in a Slim Trim 4-in-1 Transition, Extra Tall Stair Nose, Vinyl Stair Cap, and Full Round Stair Tread. please see daltile.com/LVF for more information.
*Special Order Transitions:	Round Stair Nose, Quarter Round, and Slim Cap

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700 - Class III, Type B - Embossed
Squareness:	ASTM F2421 - Passes - ± 0.010 " max
Size and Tolerance:	ASTM - F2421 - Passes - Plank Length > 48 in. ± 0.080 in. (2mm)
Thickness:	ASTM F386 - Passes - ± 0.008 in.
Dimensional Stability:	ASTM F2199 - Passes - Residential & Commercial - Res. 0.25% / lin ft. (0.080 in.) avg. max. Comm 0.20% /lin ft. (0.080 in.) avg. max.
Static Load Limit:	ASTM F970 - Passes - Average ≤ 0.005 in.
Residual Indentation:	ASTM F1914 - Passes - $\leq 8\%$
Resistance To Chemicals:	ASTM F925 - Passes - No more than a slight change
Resistance To Light:	ASTM F1515 - Passes - $\Delta E < 8.0$
Resistance To Heat:	ASTM F1514 - Passes - Average $\Delta E < 8.0$

NOTES

See daltile.com/LVF for recommended installation and care guidelines



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com/LVF

PROSERIES™
LUXURY VINYL FLOORING

daltile

©2024 Dal-Tile, LLC (5/24)

COORDINATING TRIM

Seven trims and moldings that are designed to coordinate with each of our existing colors within the collection.


STOCKING ITEMS:

- EXTSN:** Extra Tall Stair Nose (2" x 94")
- VSCAP:** Flush-Mount Vinyl Stair Cap (2-3/4" x 44") (Length may vary by series.)
- SLMIT:** Slim Trim 4-in-1 Transition (2" x 94") , Four unique trims and moldings in one single SKU (T-Molding, Hard Surface Reducer, Carpet Transition, End Cap)
- RNDSTRD:** Full Round Stair Tread (12-1/5" x 50")

SPECIAL ORDER ITEMS:


- VRDSN:** Round Stair Nose (1-3/4" x 94")
- VQRND:** Quarter Round (3/4" x 94")
- VSLCAP:** Slim Cap, Low Profile End Cap (1-3/8" x 94")

STOCKING ITEMS:

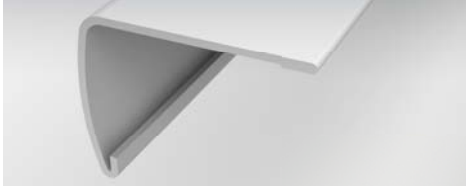

EXTRA TALL STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*

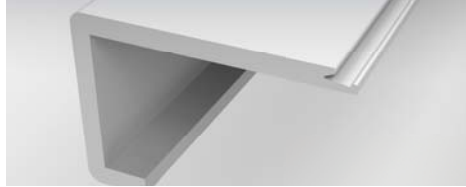


VINYL STAIR CAP

Creates a smooth and flush finish on the edges of steps by using the same vinyl flooring plank to ensure a corresponding color and texture.



SLIM TRIM 4-IN-1 TRANSITION

Performance Accessories' exclusive 4-in-1 transition allows you to utilize a single transition for four different applications.

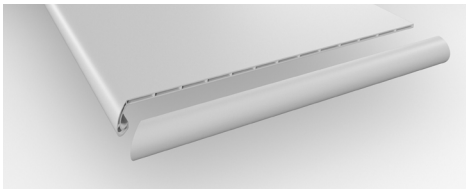

FULL ROUND STAIR TREAD

A vinyl stair tread with pre-attached stair nosing. Can be used on steps with or without nosing.

EACH OF THE BELOW ARE ACHIEVED VIA THE SLIM TRIM 4-IN-1 TRANSITION (SHOWN ABOVE)



T-MOLDING

Used to transition between flooring of equal heights and in doorways.



HARD SURFACE REDUCER

Connects two floors of different heights.



END MOLDING


Finishing up to a threshold, sliding door, etc.



CARPET TRANSITION


Provides a smooth transition between your hard surface floor & carpet. A carpet tap down trim must be used & is sold at your local hardware store.

SPECIAL ORDER ITEMS:

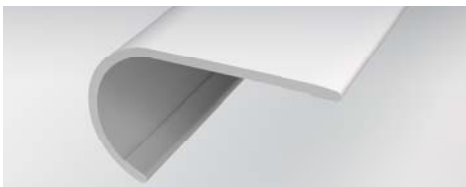

ROUND STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*

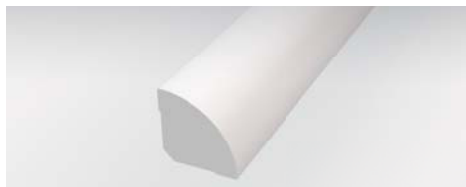

QUARTER ROUND

Conceals the expansion space between the wall and the flooring.



SLIM CAP

Low profile end cap used to transition from flooring to carpet, masonry, sliding doors, and other exterior door jambs.



*References to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.