6.0 mm I 12 mil | 6.0 mm I 20 mil
7.5 mm I 12 mil | 7.5 mm I 20 mil

GRANTSHIRE™

RIGID CLICK

PROSERIES™
LUXURY VINYL FLOORING
daltile



SuperGuardX™
REINFORCED SHIELD

6.0 mm I 12 mil | 6.0 mm I 20 mil
7.5 mm I 12 mil | 7.5 mm I 20 mil

GRANTSHIRE™

RIGID CLICK

With breathtaking visuals, Grantshire takes inspiration from European marbles while offering the comfort and ease of luxury vinyl flooring. Available in four marble looks and two versatile rectangle sizes - the classic 12 x 24 and the larger 18 x 36. Grantshire offers premium features including a Uniclic® locking system, which ensures a seamless installation, as well as SuperGuardX™ Technology for lasting durability. Select beauty and function with Grantshire.

TIMELESS LUXURY

- Four Marble Visuals
- Multi-layer SPC rigid core with Uniclic® Locking System
- Built-in solid IXPE underlayment pad that resists mold, mildew, and provides acoustical attenuation properties
- 12 x 24 Size Available with a 6.0 mm Thickness
- 18 x 36 Size Available with a 7.5 mm Thickness
- Micro beveled

PREMIUM FEATURES

- SuperGuardX™ Technology
- 12 mil & 20 mil Wear Layers
- 100% Waterproof
- 100% Virgin Vinyl

IMAGINE WHAT'S POSSIBLE™ WITH DALTILE DESIGNS

Cover photo features Grantshire™ Solara White, 12 x 24 on the floor.
Above photo features Grantshire™ Genoa Grigio, 12 x 24 on the floor.

6.0 mm I 12 mil | 6.0 mm I 20 mil
7.5 mm I 12 mil | 7.5 mm I 20 mil

GRANTSHIRE™

RIGID CLICK

SIZES:

18 x 36 Floor Tile

12 x 24 Floor Tile

12 x 24 & 18 x 36 MARBLE LOOKS - NINE PIECES SHOWN



CATANIA CALACATTA GR41



SOLARA WHITE GR42



TUSCAN TAUPE GR43



GENOA GRIGIO GR44

6.0 mm | 12 mil | 6.0 mm | 20 mil
7.5 mm | 12 mil | 7.5 mm | 20 mil

GRANTSHIRE™

RIGID CLICK

NOISE **REDUCING** | **EASY** TO CLEAN | **100%** WATERPROOF | **100%** VIRGIN VINYL


SPECIFICATIONS	6.0 mm | 12 mil	6.0 mm | 20 mil	7.5 mm | 12 mil	7.5 mm | 20 mil
Product Type:	SPC Rigid Core LVF	SPC Rigid Core LVF	SPC Rigid Core LVF	SPC Rigid Core LVF
Installation:	Rigid Click	Rigid Click	Rigid Click	Rigid Click
Thickness:	6.0 mm	6.0 mm	7.5 mm	7.5 mm
Wear Layer:	12 mil (0.3048 mm)	20 mil (0.508 mm)	12 mil (0.3048 mm)	20 mil (0.508 mm)
Finish:	SuperGuard X™ Technology	SuperGuard X™ Technology	SuperGuard X™ Technology	SuperGuard X™ Technology
Size:	12" W x 24" L	12" W x 24" L	18" W x 36" L	18" W x 36" L
Underlayment:	Pad Attached; 1.0 mm IXPE	Pad Attached; 1.0 mm IXPE	Pad Attached; 1.0 mm IXPE	Pad Attached; 1.0 mm IXPE
Bevel:	Micro Bevel	Micro Bevel	Micro Bevel	Micro Bevel
Embossing:	Embossed	Embossed	Embossed	Embossed
Variation:	90 sf repeat - 36 Unique Pieces	90 sf repeat - 36 Unique Pieces	81 sf repeat - 12 Unique Pieces	81 sf repeat - 12 Unique Pieces
Sq. Ft./Carton:	20.00	20.00	22.50	22.50
Pieces/Carton:	10	10	5	5
Weight	4.19 lbs per pc 41.90 lbs per carton	4.19 lbs per pc 41.90 lbs per carton	12.5 lbs per pc 62.50 lbs per carton	12.5 lbs per pc 62.50 lbs per carton
Warranty	**12 mil** Limited 30 Year Residential Warranty Limited 10 Year Multifamily Warranty Limited 7 Year Light Commercial Warranty		**20 mil** Limited Lifetime Residential Warranty Limited 15 Year Multifamily Warranty Limited 15 Year Light Commercial Warranty Limited 15 Year Commercial Warranty	

Installation Advisory:	Grantshire™ click LVF uses Uniclic® Locking System: no adhesive required See daltle com/LVF for more recommened installation information.
Stocking Platform:	6.0 mm | 12 mil & 20 mil and 7.5 mm | 12 mil & 20 mil.
Special Order Platform:	Additional platforms available on special order, minimum quantities apply. Contact your Daltile representative for additional information.
Transitions:	Click LVF transitions are offered in a Slim Trim 4-in-1 Transition, Extra Tall Stair Nose, Full Round Stair Tread, Round Stair Nose, Quarter Round, and Slim Cap. Please see daltile.com/LVF for more information.

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700 - Class III, Type B Embossed
Squareness:	ASTM F2421 - Passes - ± 0.010" max
Size and Tolerance:	ASTM F2421 - Passes - Plank Length ≥ ± 0.060 in.
Thickness:	ASTM 386/387 - Passes - ± 0.008 inches from specified thickness (0.079 in.)
Flexibility:	ASTM F137 - Passes - 1" mandrel, no crack or break
Dimensional Stability:	ASTM F2199 - Passes - Residential & Commercial - Res 0.25%/ lin ft. (0.080 in) avg max. Comm 0.20% / lin ft. (0.080 in) avg max
Static Load Limit:	ASTM F970- Passes - Average ≤ 0.005 inches
Residual Indentation:	ASTM F1914 - Passes - Average ΔE ≤ 8.0
Resistance To Chemicals:	ASTM F925 - Passes - No more than a slight change
Resistance To Light:	ASTM F1515 - Passes - ΔE < 8.0
Resistance To Heat:	ASTM F1514 - Passes - Average ΔE < 8.0
Critical Radiant Flux:	ASTM E648 - Passes - Class 1 (> 0.45w/cm2)
Smoke Density:	ASTM E662 - Part A - Passes - <450

INSTALLATION OPTIONS



33% BRICK JOINT

NOTES

See daltile.com/LVF for recommended installation and care guidelines.

Please note that shade variations may occur in the same colors of Grantshire™ between the different product platforms: including rigid click and flexible glue down, as well as between the different wear layers: 12 mil and 20 mil. These variations are a natural result of the manufacturing process and do not affect the quality or performance of the product. Color selections need to be made with samples of the exact platform and wear layer.

floor score — CERTIFIED BY SCS Global Services

CERTIFIED INDOOR AIR QUALITY — SCS GLOBAL SERVICES

UNICLIC® PATENTED TECHNOLOGY

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at **daltile.com/LVF**

PROSERIES™ LUXURY VINYL FLOORING
daltile

©2026 Dal-Tile Distribution, LLC (8/26)

COORDINATING TRIM

PERFORMANCE ACCESSORIES

Six trims and moldings that are designed to coordinate with each of our existing colors within the collection.

STOCKING ITEMS:

EXTSN: Extra Tall Stair Nose (2" x 94")

SLIMT: Slim Trim 4-in-1 Transition (2" x 94"), Four unique trims and moldings in one single SKU (T-Molding, Hard Surface Reducer, Carpet Transition, End Cap)


RNDSTRD: Full Round Stair Tread (12-1/5" x 50")

VRDSN: Round Stair Nose (1-3/4" x 94")

VQRND: Quarter Round (3/4" x 94")

VSLCAP: Slim Cap, Low Profile End Cap (1-3/8" x 94")

STOCKING ITEMS:

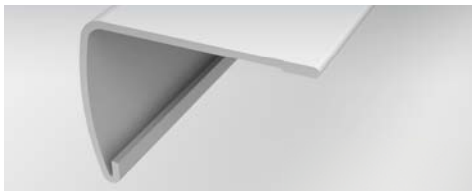


EXTRA TALL STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*



SLIM TRIM 4-IN-1 TRANSITION

Performance Accessories' exclusive 4-in-1 transition allows you to utilize a single transition for four different applications.

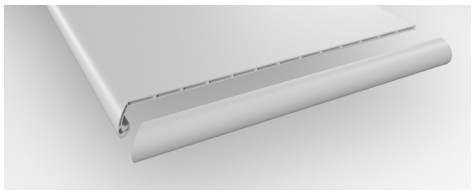

FULL ROUND STAIR TREAD

A vinyl stair tread with pre-attached stair nosing. Can be used on steps with or without nosing.

EACH OF THE BELOW ARE ACHIEVED VIA THE SLIM TRIM 4-IN-1 TRANSITION (SHOWN ABOVE)



T-MOLDING

Used to transition between flooring of equal heights and in doorways.



HARD SURFACE REDUCER

Connects two floors of different heights.




END MOLDING

Finishing up to a threshold, sliding door, etc.




CARPET TRANSITION

Provides a smooth transition between your hard surface floor & carpet. A carpet tap down trim must be used & is sold at your local hardware store.

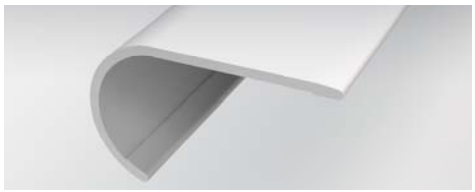

ROUND STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*

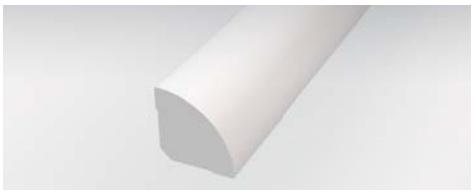

QUARTER ROUND

Conceals the expansion space between the wall and the flooring.



SLIM CAP

Low profile end cap used to transition from flooring to carpet, masonry, sliding doors, and other exterior door jambs.

UNICLIC® PATENTED TECHNOLOGY

floor score CERTIFIED BY SCS Global Services

CERTIFIED INDOOR AIR QUALITY SCS GLOBAL SERVICES

*References to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

PROSERIES™ LUXURY VINYL FLOORING daltile

©2026 Dal-Tile Distribution, LLC (8/26)