10mm | 20 mil

HALVERTON™

RIGID CLICK

PROSERIES™

LUXURY VINYL FLOORING

daltile



SuperGuardX™
REINFORCED SHIELD

Styled Edge™

10mm | 20 mil

HALVERTON™

RIGID CLICK

Halverton captures the essence of handcrafted elegance with rich, authentic wood visuals and embossing in register for ultra-realistic texture. Enhanced by Styled Edge™, which mimics unique chiseled edges, every detail is designed to reflect the natural beauty of true hardwood. Available in generous 9" x 72" planks and high-end 9" x free-length options, Halverton allows for distinctive layouts that make every installation feel custom and unique. Integrated with an acoustical pad for added comfort and high sound attenuation, it offers a sense of quiet luxury at every turn. Crafted to elevate everyday living, Halverton delivers beauty and substance beneath every step.

PREMIUM AND MODULAR

- Uniclic® Locking System
- Styled Edge™ mimics high-end chiseled edges.
- Built-in solid IXPE underlayment pad
- Modular, flexible free-length sizes offered in 9 x 27, 9 x 45, and 9 x 72
- Embossed in Register
- SuperGuardX™ Technology
- 100% Waterproof

IMAGINE WHAT'S POSSIBLE™ WITH DALTILE DESIGNS

Cover and above photos feature Hampton, 9 x Free Length on the floor.

10mm | 20 mil

HALVERTON™

RIGID CLICK

SIZES:

9 x 72 Plank

9 x Free Length Wood Planks

9 x 72 WOOD LOOK PLANKS



VISTA HL50



HAMPTON HL51



HORIZON HL52



ESTATE HL53



VALE HL54



HUDSON HL55

10mm | 20 mil

HALVERTON™

RIGID CLICK

SIZES:

9 x 72 Plank

9 x Free Length Wood Planks

9 x FREE LENGTH WOOD LOOK PLANKS



VISTA HL50



HAMPTON HL51



HORIZON HL52



ESTATE HL53



VALE HL54



HUDSON HL55

10mm | 20 mil

HALVERTON™


RIGID CLICK

SIZES:

9 x 72 Plank

9 x Free Length Wood Planks

9 x FREE LENGTH PATTERN REFERENCE

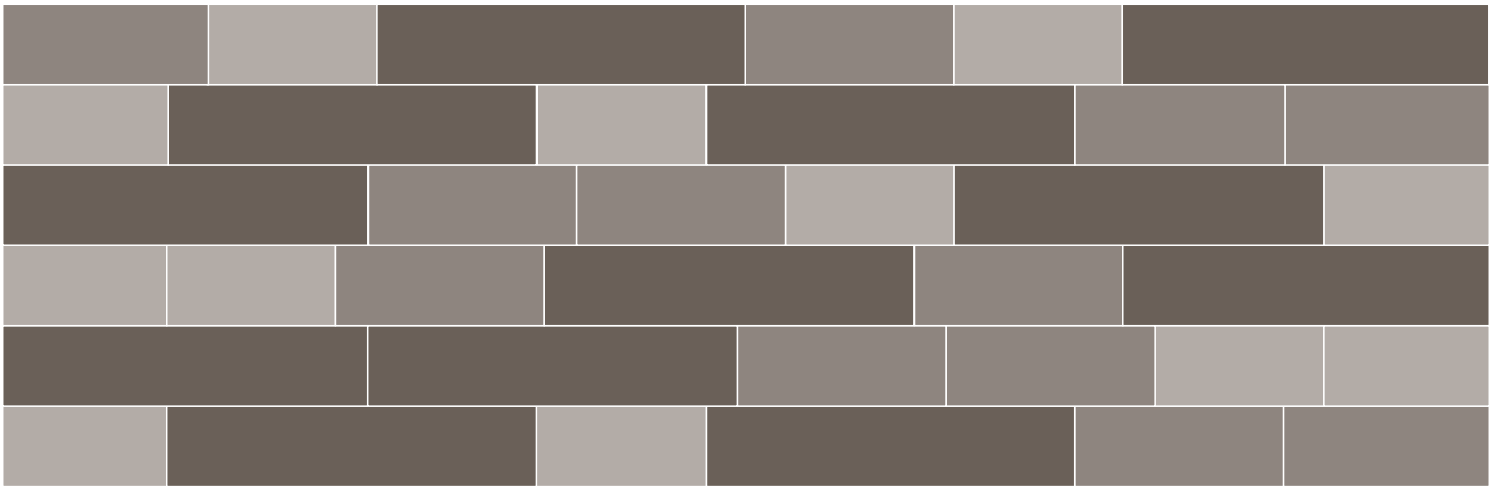

9 x FREE LENGTH PATTERN SIZES



9" x 27"

9" x 45"

9" x 72"

STYLED EDGE™ BEVEL



Styled Edge™ brings the artistry of hand-chiseled hardwood into Halverton. Carefully sculpted edges introduce natural variation, shadows, and a sense of craftsmanship that mirrors the organic character of real wood, delivering a floor that feels tactile and visually rich.

10mm | 20 mil

HALVERTON™

RIGID CLICK

NOISE **REDUCING** | **EASY** TO CLEAN | **100%** WATERPROOF | **100%** VIRGIN VINYL

SPECIFICATIONS

SPECIFICATIONS	9" W x 72" L	9" W x 27" L , 9" W x 45" L & 9" W x 72" L Plank
Product Type:	SPC Rigid Core LVF	SPC Rigid Core LVF
Installation:	Rigid Click	Rigid Click
Thickness:	10 mm	10 mm
Wear Layer:	20 mil (0.508 mm)	20 mil (0.508 mm)
Finish:	SuperGuardX™ Technology	SuperGuardX™ Technology
Size:	9" W x 72" L Plank	9" W x 27" L, 9" W x 45" L & 9" W x 72" L Plank
Underlayment:	Pad Attached; 2.0 mm IXPE	Pad Attached; 2.0 mm IXPE
Bevel:	Styled Edge™ Bevel	Styled Edge™ Bevel
Embossing:	Embossed in Register EIR	Embossed in Register EIR
Plank Variation:	12 Unique Planks	18 Unique Planks
Sq. Ft./Carton:	26.64	26.64
Pieces/Carton:	6	8
Weight:	10.39 lbs per pc/ 62.34 lbs per carton	10.39 lbs per pc/ 62.34 lbs per carton
Warranty:	Limited Lifetime Residential Warranty Limited 15 Year Multifamily Warranty Limited 15 Year Light Commercial Warranty Limited 15 Year Commercial Warranty	Limited Lifetime Residential Warranty Limited 15 Year Multifamily Warranty Limited 15 Year Light Commercial Warranty Limited 15 Year Commercial Warranty
Installation Advisory:	Halverton™ click LVF uses Uniclic® Locking System. See daltile.com/LVF for more recommended installation information.	
Transitions:	Click LVF transitions are offered in a Slim Trim 4-in-1 Transition, Extra Tall Stair Nose, Full Round Stair Tread, Round Stair Nose, Quarter Round, and Slim Cap. See daltile.com/LVF for more information.	
Stocking Platform:	10 mm | 20 mil	

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700 - Class III, Type B Embossed
Squareness:	ASTM F2421 - Passes - ± 0.010" max
Size and Tolerance:	ASTM F2421 - Passes - Plank Length > 48 in. ± 0.060 in.
Thickness:	ASTM F386 - Passes - ± 0.008 inches
Dimensional Stability:	ASTM F2199 - Passes - Residential 0.25% & Commercial 0.20% avg. 0.080 in.
Static Load Limit:	ASTM F970 - Passes - Average ≤ 0.005 in.
Residual Indentation:	ASTM F1914 - Passes - ≤ 8%
Resistance To Chemicals:	ASTM F925 - Passes - No more than a slight change
Resistance To Light:	ASTM F1515 - Passes - ΔE < 8.0
Resistance To Heat:	ASTM F1514 - Passes - Average ΔE < 8.0
Critical Radiant Flux:	ASTM E648 - Passes - Class 1 (>0.45w/cm2)
Smoke Density:	ASTM E662 - Part A - Passes - <450

NOTES

See daltile.com/LVF for recommended installation and care guidelines.

floor score — CERTIFIED BY SCS Global Services

CERTIFIED INDOOR AIR QUALITY™ SCS GLOBAL SERVICES

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at **daltile.com/LVF**

PROSERIES™ LUXURY VINYL FLOORING

daltile

©2026 Dal-Tile, LLC (07/26)

COORDINATING TRIM

PERFORMANCE ACCESSORIES

Six trims and moldings that are designed to coordinate with each of our existing colors within the collection.

STOCKING ITEMS:

EXTSN: Extra Tall Stair Nose (2" x 94")

SLIMT: Slim Trim 4-in-1 Transition (2" x 94"), Four unique trims and moldings in one single SKU (T-Molding, Hard Surface Reducer, Carpet Transition, End Cap)


RNDSTRD: Full Round Stair Tread (12-1/5" x 50")

VRDSN: Round Stair Nose (1-3/4" x 94")

VQRND: Quarter Round (3/4" x 94")

VSLCAP: Slim Cap, Low Profile End Cap (1-3/8" x 94")

STOCKING ITEMS:

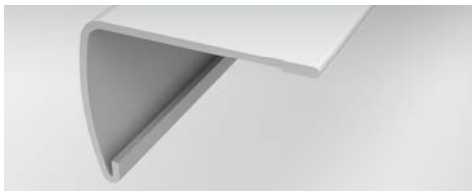


EXTRA TALL STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*



SLIM TRIM 4-IN-1 TRANSITION

Performance Accessories' exclusive 4-in-1 transition allows you to utilize a single transition for four different applications.

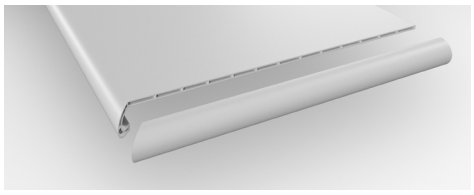

FULL ROUND STAIR TREAD

A vinyl stair tread with pre-attached stair nosing. Can be used on steps with or without nosing.

EACH OF THE BELOW ARE ACHIEVED VIA THE SLIM TRIM 4-IN-1 TRANSITION (SHOWN ABOVE)



T-MOLDING

Used to transition between flooring of equal heights and in doorways.



HARD SURFACE REDUCER

Connects two floors of different heights.




END MOLDING

Finishing up to a threshold, sliding door, etc.




CARPET TRANSITION

Provides a smooth transition between your hard surface floor & carpet. A carpet tap down trim must be used & is sold at your local hardware store.

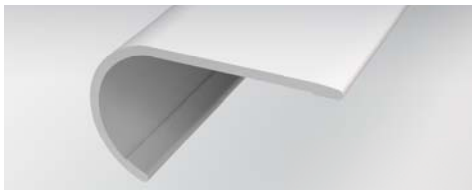

ROUND STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*

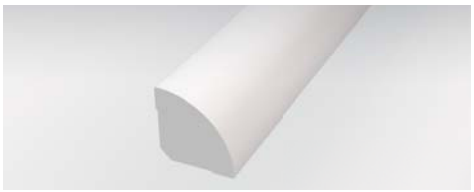

QUARTER ROUND

Conceals the expansion space between the wall and the flooring.



SLIM CAP

Low profile end cap used to transition from flooring to carpet, masonry, sliding doors, and other exterior door jambs.

UNICLIC® PATENTED TECHNOLOGY

floor score CERTIFIED BY SCS Global Services

CERTIFIED INDOOR AIR QUALITY SCS GLOBAL SERVICES

*References to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

PROSERIES™ LUXURY VINYL FLOORING daltile

©2026 Dal-Tile, LLC (07/26)