

STONE LOOK

XTERIORS™

ALL-WEATHER SOLUTIONS FOR EXTERIOR STYLE

BY  daltile



AMBASSADOR™

COLORBODY™ PORCELAIN PAVERS AND MOSAICS

TREAD™
PORCELAIN PAVERS

Timeless Meets Modern

Inspired by the fine-grained quartzite found in the Swiss Alps, the Ambassador series combines lasting durability with high-end styling. Eons of stratification are reflected in the distinctive mono-directional graining of this ColorBody™ porcelain tile. Large format size in two simplified colors make the series a natural choice for design possibilities in commercial and residential spaces.



Cover photo features Voyager Black 2cm pavers on the ground.
Above photo features Jet Setter Dusk 2cm pavers on the ground.

STONE
LOOK

USAGE

FLOOR

WALL

COUNTERTOP

SHOWER FLOOR

EXTERIOR FLOOR

STEPWISE™

TRU-EDGE™

REVEAL SYNC3D™

MADE IN THE U.S.A.

LARGE FORMAT

MOSAIC/DECO

ENCAUSTIC

TERRAZZO

PAVER

CUSTOMIZE

PC

LOW HIGH

SPECIAL FEATURES

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE
CHARTS FOR FULL
PRODUCT DETAILS.

STONE LOOK

AMBASSADOR™

COLORBODY™ PORCELAIN PAVERS AND MOSAICS

SIZES:




16 x 48
Paver Tile



Random Linear
Mosaic Tile

FINISHES: TEXTURED | MATTE

COLORBODY™ PORCELAIN PAVERS

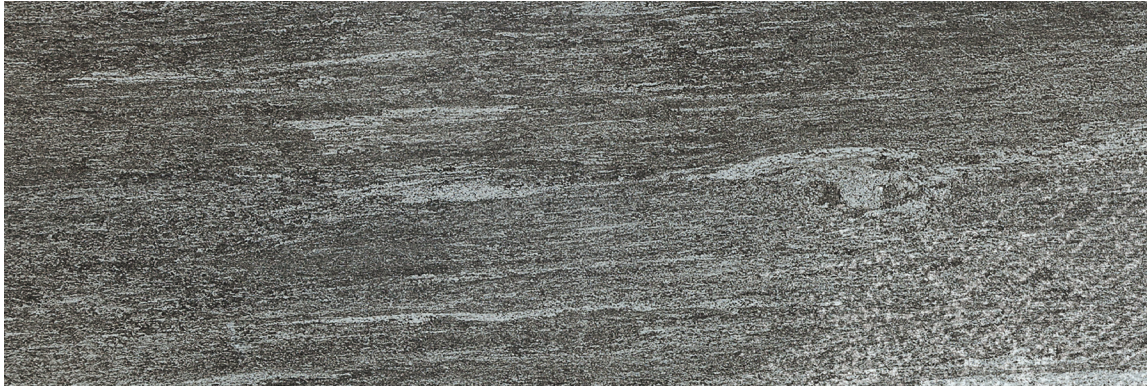

VOYAGER BLACK AM33



JET SETTER DUSK AM34

COLORBODY™ PORCELAIN RANDOM LINER MOSAIC TILE



JET SETTER DUSK AM34



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT
*Not Applicable to Mesh-Mounted
Mosaics









INDOOR/OUTDOOR





SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Finish
	16 x 48 Paver Tile	15-9/16" x 47" (39.60 cm x 119.50 cm)	13/16" (2cm)	
	Random Linear Mosaic Tile (Mesh-mounted)	11-1/2" x 24" (29.21 cm x 60.96 cm)	5/16"	
 Matte Finish  Textured Finish				

TRIM†

	Type
	Step Nose Tile
	Coping Tile

† Trim items available in many sizes and colors. Consult with your sales representative and/or design team for specifics.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓*
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest®, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

*Paver tile only.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.



INSTALLATION

Dry Laying on Grass:	The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Dry Laying on Gravel:	Gaps of at least 3/16" (5 mm) should be left between slabs, using spacers to set the correct width. Joint may be left empty or filled with fine sand, polymeric sand specifically formulated for porcelain tile or small, clean aggregate, depending on the joint width and desired aesthetic.
Dry Laying on Sand:	The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Laying on Screed with Adhesive:	Slabs must be laid with open joints of variable width of no less than 3/16" (5 mm).
Raised Pavings:	Pedestal contains correct tile spacers for application.
Mosaic:	1/8"

SHADE VARIATION



PERFORMANCE CHARACTERISTICS

	ASTM#	Mosaic Result	Paver Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648 C1505	> 275 lbf N/A	N/A ≥ 2000 lbf
Scratch Hardness	C1895	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
Abrasion Resistance	C1027	N/A	N/A

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.3 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors,

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltille® products and information,
visit our website at daltille.com.

