

STONE LOOK

XTERIORS™

ALL-WEATHER SOLUTIONS FOR EXTERIOR STYLE

BY  daltile



DELEGATE™

COLORBODY™ PORCELAIN PAVERS AND MOSAICS

TREAD™
PORCELAIN PAVERS

DELEGATE™

COLORBODY™ PORCELAIN PAVERS AND MOSAICS

Natural Geologic Movement

Delegate represents a contemporary and versatile design option for today's spaces. The diagonal visual on this ColorBody™ porcelain tile is the subtle evidence of nature's powerful geological movements. Gentle color movement in the white and grey shades offers a slight visual distinction from the darker, monochromatic black hue. This sedimentary slate-inspired design offers a rich visual with depth and interest in a 20 x 40 2cm paver tile suitable for any exterior application. Harmonize with a random linear mosaic or 3D brick-joint mosaic for a comprehensive stone look.

STONE LOOK

USAGE



SPECIAL FEATURES

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE
CHARTS FOR FULL
PRODUCT DETAILS

TAKE IT OUTSIDE



EXTERIORS BY DALTILE

Cover photo features Dark Grey 2cm pavers on the ground.
Above photo features Dark Grey 2cm pavers on the ground.

STONE LOOK

DELEGATE™

COLORBODY™ PORCELAIN PAVERS AND MOSAICS

SIZES:



20 x 40
Paver Tile



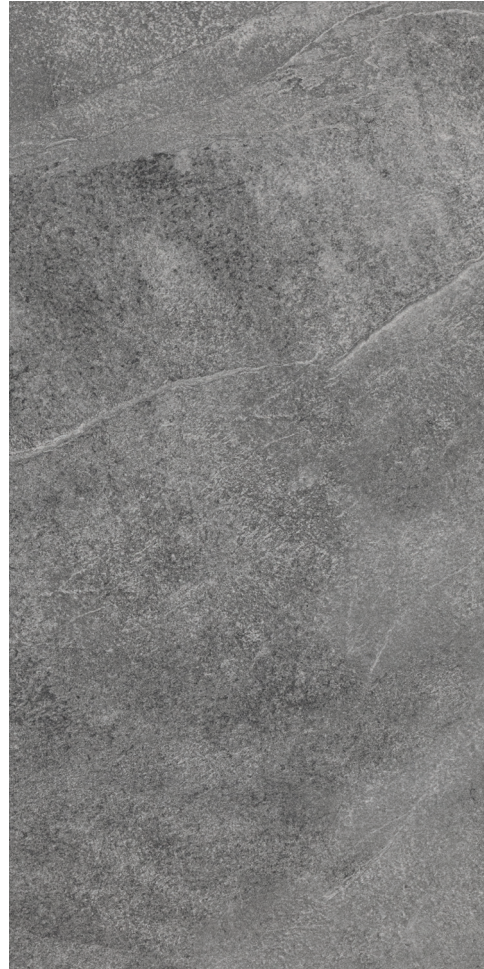
Random Linear
Mosaic Tile

FINISHES: TEXTURED | MATTE

COLORBODY™ PORCELAIN PAVERS



LIGHT GREY DL26



DARK GREY DL27

COLORBODY™ PORCELAIN RANDOM LINER MOSAIC TILE



LIGHT GREY DL26



DARK GREY DL27



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT
*Not Applicable to Mesh-Mounted
Mosaics







INDOOR/OUTDOOR



SIMPLICLEAN™



VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Finish
	20 x 40 Paver Tile	19-1/2" x 39-3/16" (49.50 cm x 99.50 cm)	13/16" (2cm)	
	Random Linear Mosaic Tile (Mesh-Mounted)	12" x 30" Sheet (30.48 cm x 76.20 cm Sheet)	5/16"	

 Matte Finish  Textured Finish

TRIM†

	Type
	Step Nose Tile
	Coping Tile

† Trim items available in many sizes and colors. Consult with your sales representative and/or design team for specifics.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓*
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest®, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

*Paver tile only



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.



INSTALLATION

Dry Laying on Grass:	The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Dry Laying on Gravel:	Gaps of at least 3/16" (5 mm) should be left between slabs, using spacers to set the correct width. Joint may be left empty or filled with fine sand, polymeric sand specifically formulated for porcelain tile or small, clean aggregate, depending on the joint width and desired aesthetic.
Dry Laying on Sand:	The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Laying on Screed with Adhesive:	Slabs must be laid with open joints of variable width of no less than 3/16" (5 mm).
Raised Pavings:	Pedestal contains correct tile spacers for application.
Mosaic:	1/8"

SHADE VARIATION



PERFORMANCE CHARACTERISTICS

	ASTM#	Mosaic Result	Paver Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648 C1505	> 275 lbf N/A	N/A ≥ 2000 lbf
Scratch Hardness	C1895	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
Abrasion Resistance	C1027	N/A	N/A

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.3 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors,

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltille® products and information,
visit our website at daltille.com.

