



WALL

STAGECRAFT™  
GLAZED CERAMIC



 daltile®  
IMAGINE WHAT'S POSSIBLE™



# STAGECRAFT™

GLAZED CERAMIC

Stagecraft™ rewrites design with a theatrical cast of colors, shapes and finishes. This collection stars 3 x 12 wall tile in a rectangular and a picket shape along with a 6-inch kaleidoscope mosaic. Stagecraft features an undulated surface and is available in five popular colors from the Color Wheel™ Collection in both glossy and matte finishes. The 3 x 12 picket wall tile also comes two crafty blends which can be used alone or mixed with the solid picket wall tile. With its astonishing patterns and versatile shapes, Stagecraft is a real showstopper.

## WALL

## USAGE




## SPECIAL FEATURES

NOT APPLICABLE  
FOR ALL PRODUCTS  
IN THIS SERIES. SEE  
CHARTS FOR FULL  
PRODUCT DETAILS.

Cover photo features Stagecraft™ Cameo Blue Mix and Matte Galaxy 3 x 12 picket on the backsplash  
Above photo features Matte Arctic White, 3 x 12 on the back wall



## SIZES:


3 x 12 Picket  
Wall Tile3 x 12  
Wall Tile6 x 6  
Kaleidoscope  
Mosaic

FINISHES: MATTE | GLOSSY


## COLOR PALETTE




ARCTIC WHITE




BLACK



DESERT GRAY



GALAXY




SPA

## 3 x 12 PICKET WALL TILE – UNDULATED

ARCTIC WHITE 0190  
MATTE ARCTIC WHITE 0790BLACK K111  
MATTE BLACK K711DESERT GRAY X114  
MATTE DESERT GRAY X714GALAXY 1469  
MATTE GALAXY 1769SPA 0148  
MATTE SPA 0748

## 3 x 12 PICKET WALL TILE – UNDULATED

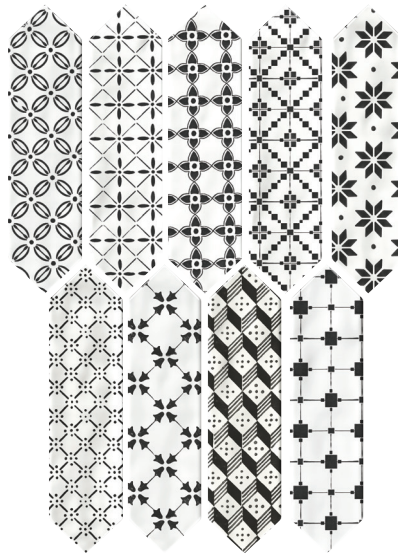CAMEO BLUE MIX SC71  
(12 unique designs)\*ENSEMBLE BLACK MIX SC70  
(9 unique designs)\*

\*Available in unique designs which are pre-boxed in a random assortment.



SLIP RESISTANT



STAINPROOF



DENTPROOF

SCRATCH-RESISTANT\*  
\*Applicable to products with Matte and Textured Finishes

FIRE-RESISTANT



SIMPLICLEAN™

WALL

STAGECRAFT™  
GLAZED CERAMIC

### 3 x 12 WALL TILE – UNDULATED



ARCTIC WHITE 0190  
MATTE ARCTIC WHITE 0790



BLACK K111  
MATTE BLACK K711



DESERT GRAY X114  
MATTE DESERT GRAY X714




GALAXY 1469  
MATTE GALAXY 1769




SPA 0148  
MATTE SPA 0748


### 6 x 6 KALEIDOSCOPE MOSAIC – UNDULATED

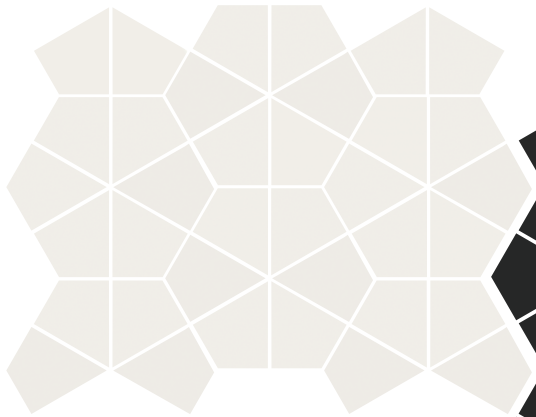


ARCTIC WHITE 0190  
MATTE ARCTIC WHITE 0790

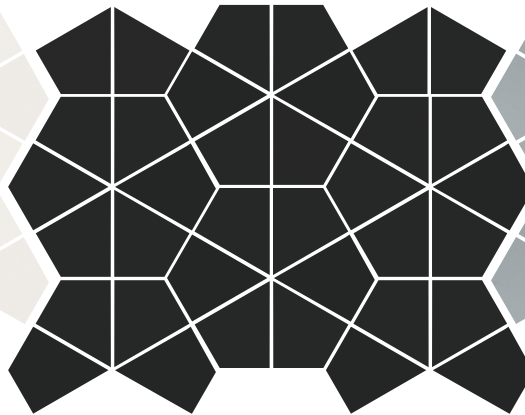


BLACK K111  
MATTE BLACK K711

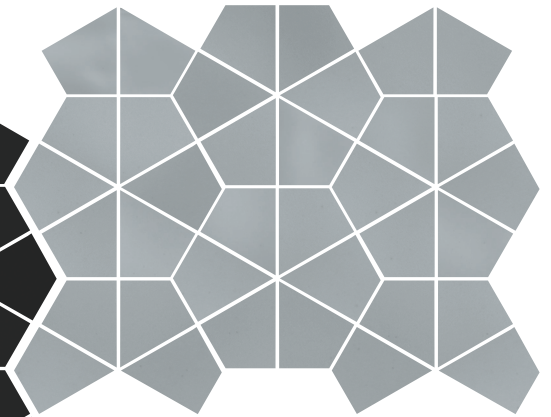

DESERT GRAY X114  
MATTE DESERT GRAY X714

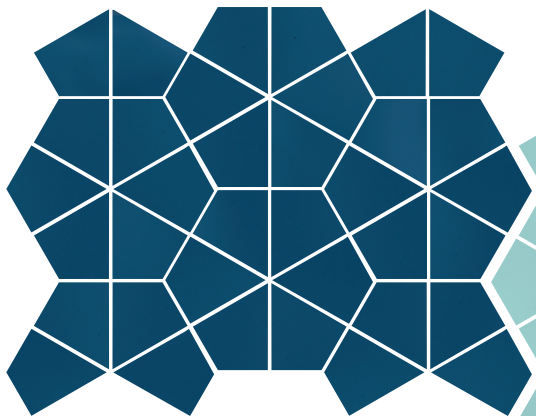

GALAXY 1469  
MATTE GALAXY 1769

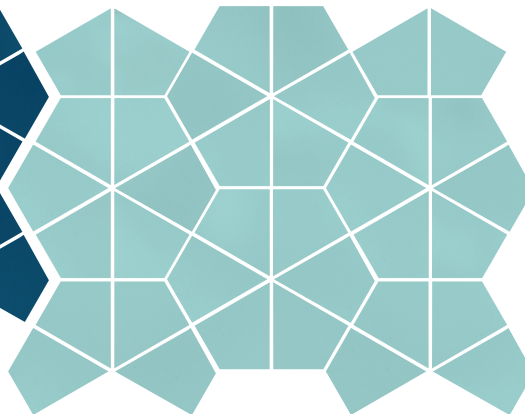

SPA 0148  
MATTE SPA 0748

### JOLLY TRIM – SOLID COLORS



ARCTIC WHITE 0190 (1)  
MATTE ARCTIC WHITE 0790 (1)



BLACK K111 (2)  
MATTE BLACK K711 (2)



DESERT GRAY X114 (1)  
MATTE DESERT GRAY X714 (1)












GALAXY 1469 (3)  
MATTE GALAXY 1769 (3)



SPA 0148 (3)  
MATTE SPA 0748 (3)



SIZES

			Thickness	Finish
	3 x 12 Picket Wall Tile*	3" x 12" (7.63 cm x 30.70 cm)	5/16"	 
	3 x 12 Wall Tile*	3" x 12" (7.65 cm x 30.70 cm)	5/16"	 
	6 x 6 Kaleidoscope Mosaic* (Dot-mounted)	12" x 15" Sheet (30.48 cm x 38.10 cm Sheet)	1/4"	 

 Matte Finish    Glossy Finish

\* Decos available in glossy finish only.

\* Available in solid colors only.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors – Standard Center Drain	≥ 0.42	✓*
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓*




A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](https://daltile.com/DCOF).

APPLICATION NOTES:

Wall and mosaic tile is suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed

\* Mosaic tile only.



TRIM

Type	Number	Size	Finish
 12" Jolly*	S1/212J	1/2 x 11-15/16	 

 Matte Finish    Glossy Finish

\*Available in solid colors only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3 x 12 Picket Wall Tile: 1/16"	 Solids: Low (V1)
3 x 12 Wall Tile : 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)	 Decos: Random (V4)
Mosaic: 1/8"	

PERFORMANCE CHARACTERISTICS

	ASTM#	Mosaic Result	Wall Result
Water Absorption	C373	< 3.0%	< 20%
Breaking Strength	C648	< 250 lbf	120 - 230 lbf
Scratch Hardness	C1895	Glossy: 4.0 - 6.0 Matte: 7.0	4.0 - 6.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](https://daltile.com/information/TestResults).

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](https://daltile.com/Factors).

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](https://daltile.com).



ZEROTOX

7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](https://daltile.com).