

**METALLIC
 LOOK**

USAGE

-  FLOOR
-  WALL
-  COUNTERTOP
-  SHOWER FLOOR
-  EXTERIOR FLOOR

STEPWISE™

TRU-EDGE™

MADE IN THE U.S.A.

LARGE FORMAT

MOSAIC/DECO

ENCAUSTIC

TERRAZZO

PAVER

CUSTOMIZE

FLEXFIT™

M METAL

SEE CHARTS FOR FULL PRODUCT DETAILS


SIZES:

-  1 x 2 3D Brick-joint
-  1 x 2 Brick-joint
-  1/2 x 1 Brick-joint
-  12 x 12 Random Interlocking Mosaic
-  1 x 1 Mosaic
-  1 x 1 3D Block
-  1/2 x 1/2 3D Cube


FINISHES: MATTE | TEXTURED




STEEL ST70 (1)
 12 x 12 Random Interlocking Mosaic

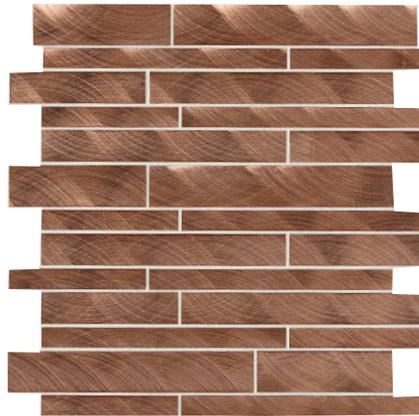


COPPER ST71 (2)
 12 x 12 Random Interlocking Mosaic

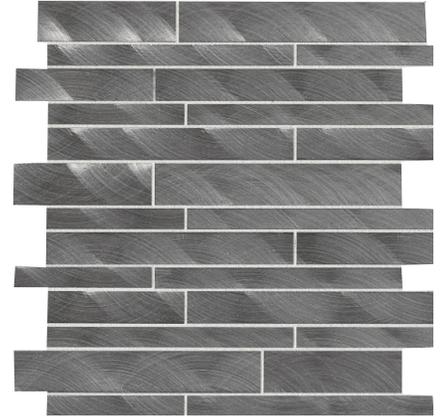


GUNMETAL ST72 (2)
 12 x 12 Random Interlocking Mosaic




STEEL ST70 (1)
 1 x 2 3D Brick-joint




STEEL ST70 (1)
 1 x 1 Mosaic



STEEL ST70 (1)
 1/2 x 1 Brick-joint



STEEL ST70 (1)
 1/2 x 1/2 3D Cube



STEEL ST70 (1)
 1 x 1 3D Block



STEEL ST70 (1)
 1 x 2 Brick-joint

JOLLY TRIM



STEEL ST70 (1)



COPPER ST71 (1)



GUNMETAL ST72 (1)

All sizes shown are available in all colors.
 (1) and (2) indicate price groups, (1) being the least expensive.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	1 x 2 3D Brick-joint (Mesh-mounted)	(1" x 2") (2.00 x 5.00 cm)	7/16"	5.80	6
	1 x 2 Brick-joint (Mesh-mounted)	(1" x 2") (2.00 x 5.00 cm)	5/16"	5.80	6
	1/2 x 1 Brick-joint (Mesh-mounted)	(1/2" x 1") (1.00 x 2.00 cm)	5/16"	5.70	6
	12 x 12 Random Interlocking Mosaic (Mesh-mounted on 12" x 12" Sheet)	(12" x 12" Sheet) (30.00 x 30.00 cm Sheet)	5/16"	5.90	6
	1 x 1 Mosaic (Mesh-mounted)	(1" x 1") (2.00 x 2.00 cm)	5/16"	5.80	6
	1 x 1 3D Block (Mesh-mounted)	(1" x 1") (2.00 x 2.00 cm)	7/16"	5.80	6
	1/2 x 1/2 3D Cube (Mesh-mounted)	(1/2" x 1/2") (1.00 x 1.00 cm)	7/16"	5.90	6

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

Aluminum mosaics are not recommended in areas where water can puddle on the product.

TRIM

Type	Number	Size	Pieces/ Carton
 12" Jolly	S-1/212J	1/2 x 11-15/16	12

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Medium (V2)

NOTES

Take careful note of the following instructions specific to brushed aluminum mosaics:

- Brushed aluminum mosaics will maintain their rich appearance with simple routine care.
- To clean the aluminum mosaic, please use a damp sponge together with warm soapy water or alcohol. Do NOT use ACID-based products or harsh detergents.

Since there are variations in all natural products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions.

For additional information refer to "Factors to Consider" at daltile.com/Factors.