

APEX INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

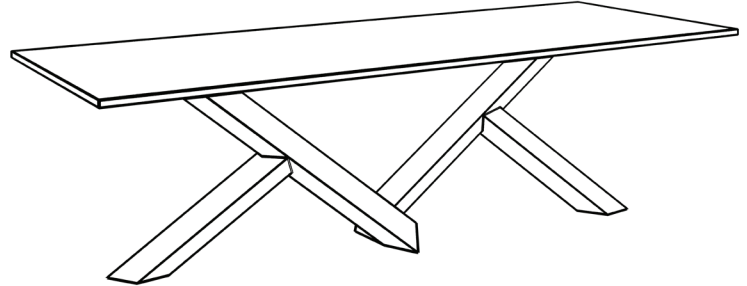

* Drawing for reference only.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:


- Table Top
- Table Base
- (6-12) Square-Drive Backer Board Screws
- (6-12) 1/4" Zinc Flat Washers

Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.


Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowe's Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowe's Item #: Clear - 9999582872 & White - 9999582871) (SSC Item #: Crystal - RDX4001 & Original - RDX4000)

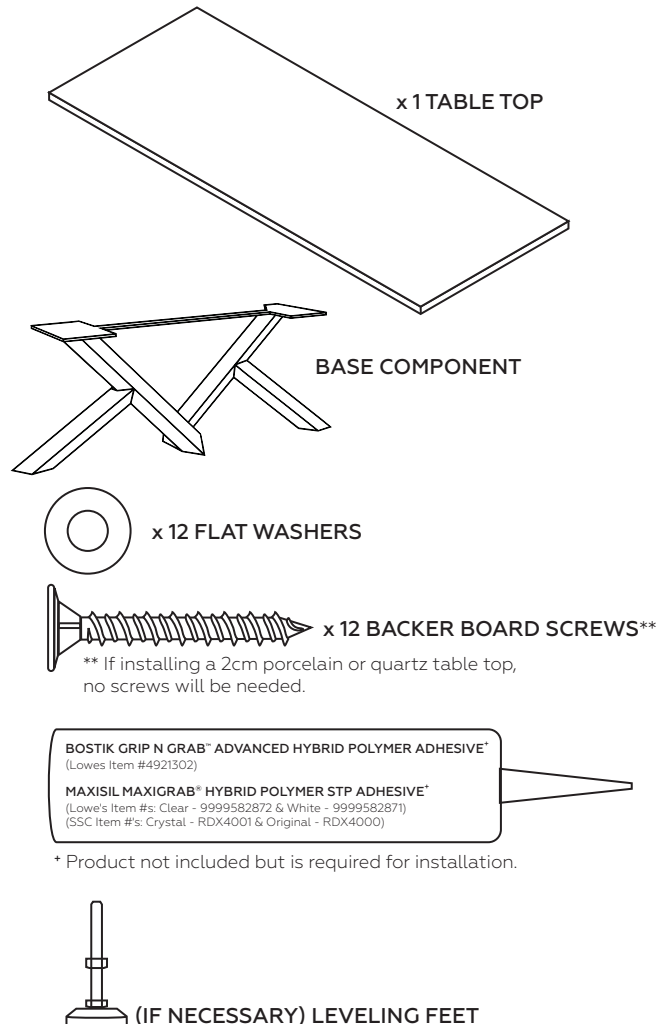


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

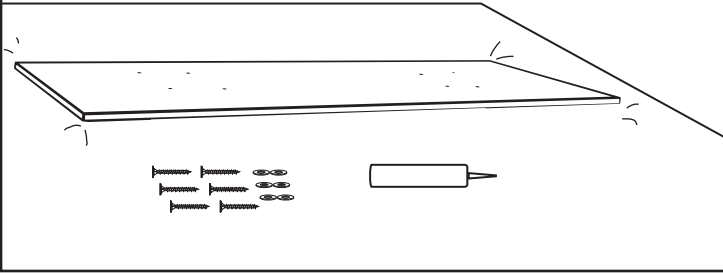


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure the overhang equals 14" on the two shorter sides (ends) and is centered (roughly 10-11.5" on the longer sides). Confirm base is evenly aligned before fastening.

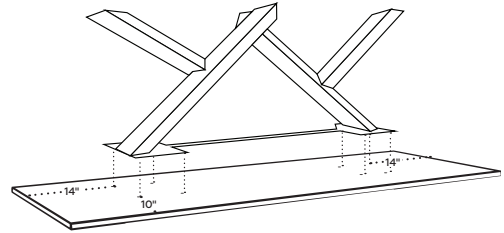


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

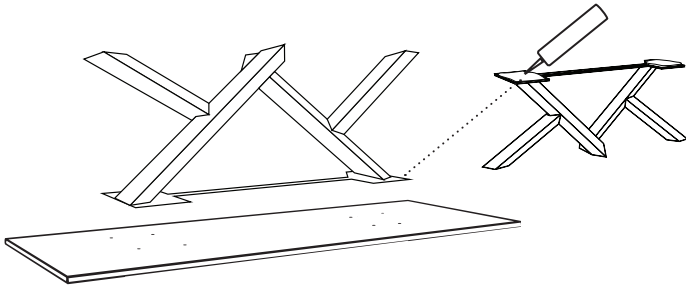


STEP 4: INSTALL SCREWS

Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

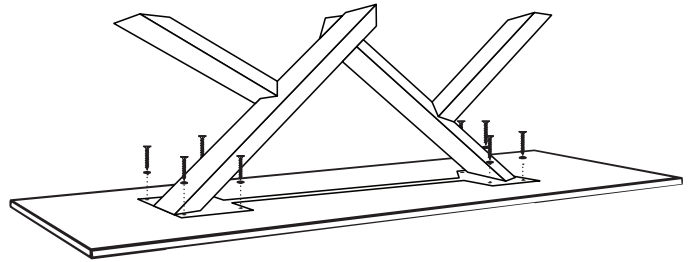


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

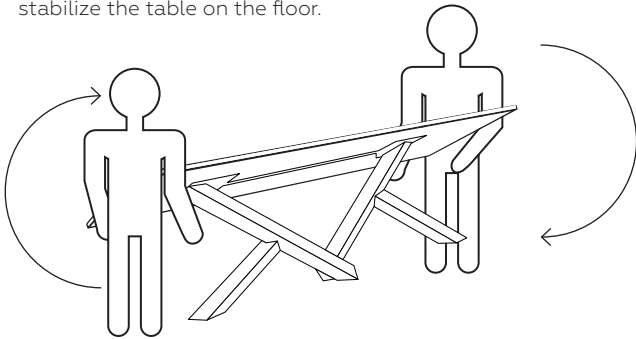

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

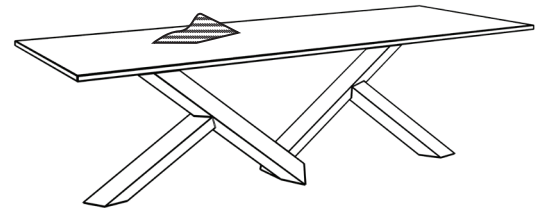

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



AXIS INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

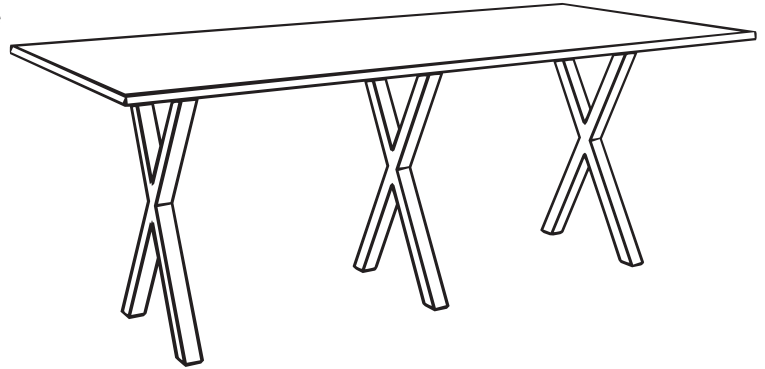

* Drawing for reference only. Base unit quantity may vary by size of the table.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:


- Table Top
- Table Base
- (6-12) Square-Drive Backer Board Screws
- (6-12) 1/4" Zinc Flat Washers

Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.

Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowes Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowes's Item #s: Clear - 9999582872 & White - 9999582871) (SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

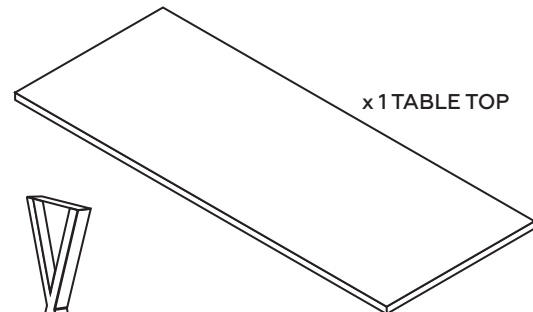

x 1 TABLE TOP

BASE COMPONENTS*

*Total will vary based on final table top size.



x 12 FLAT WASHERS




x 12 BACKER BOARD SCREWS**

** If installing a 2cm porcelain or quartz table top, no screws will be needed.

BOSTIK GRIP N GRAB™ ADVANCED HYBRID POLYMER ADHESIVE*
(Lowes Item #4921302)

MAXISIL MAXIGRAB® HYBRID POLYMER STP ADHESIVE*
(Lowes's Item #s: Clear - 9999582872 & White - 9999582871)
(SSC Item #s: Crystal - RDX4001 & Original - RDX4000)


* Product not included but is required for installation.



(IF NECESSARY) LEVELING FEET


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

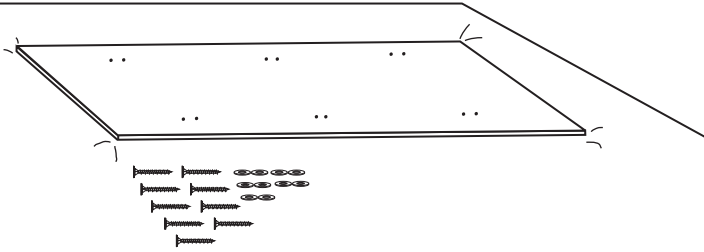


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure the overhang equals 14" on the two shorter sides (ends) and is centered (roughly 10-11.5" on the longer sides). If a third leg is provided, make sure it is centered between the left and right base legs in the middle of the table. Confirm base legs are evenly aligned before fastening.

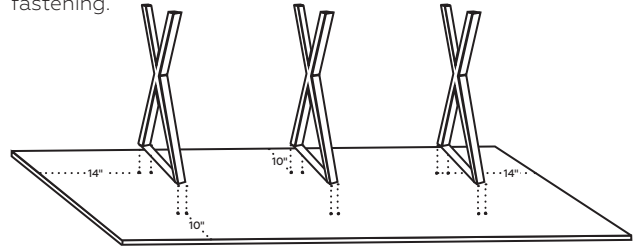


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

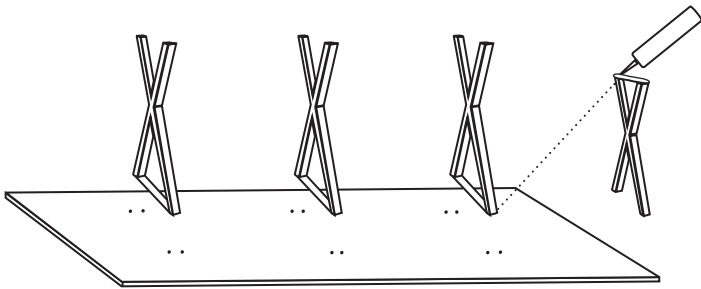


STEP 4: INSTALL SCREWS

Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

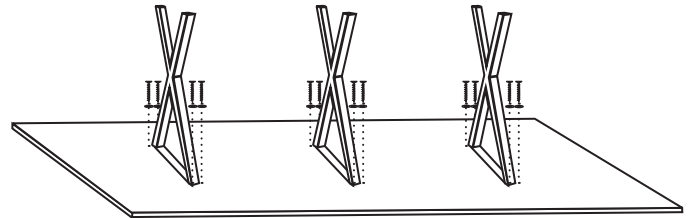


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

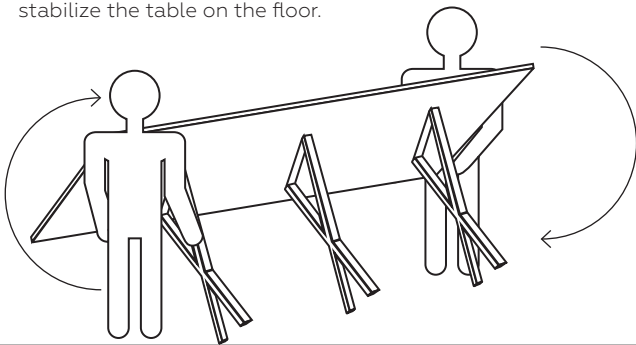

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

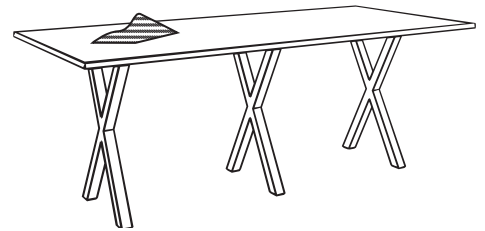

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



CONTOUR INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.


Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

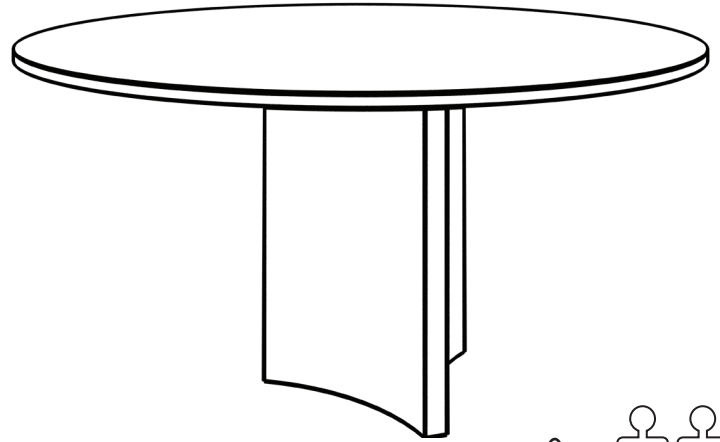

* Drawing for reference only. Base unit quantity may vary by size of the table.



HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:

- Table Top
- Table Base
- (6-12) Square-Drive Backer Board Screws
- (6-12) 1/4" Zinc Flat Washers


Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.


Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowe's Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowe's Item #s: Clear - 9999582872 & White - 9999582871) (SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

Note: Options shown on circular tables may also be installed on square/rectangular tables. Use screws when installing these options on square/rectangular tables.

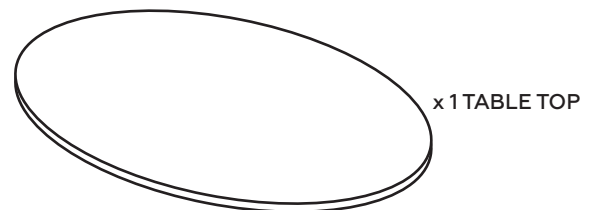

x 1 TABLE TOP



BASE COMPONENTS*

*Total will vary based on final table top size.



x 12 FLAT WASHERS




x 12 BACKER BOARD SCREWS**

** If installing a 2cm porcelain or quartz table top, no screws will be needed.

BOSTIK GRIP N GRAB™ ADVANCED HYBRID POLYMER ADHESIVE*
(Lowe's Item #4921302)

MAXISIL MAXIGRAB® HYBRID POLYMER STP ADHESIVE*
(Lowe's Item #s: Clear - 9999582872 & White - 9999582871)
(SSC Item #s: Crystal - RDX4001 & Original - RDX4000)


* Product not included but is required for installation.



(IF NECESSARY) LEVELING FEET


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

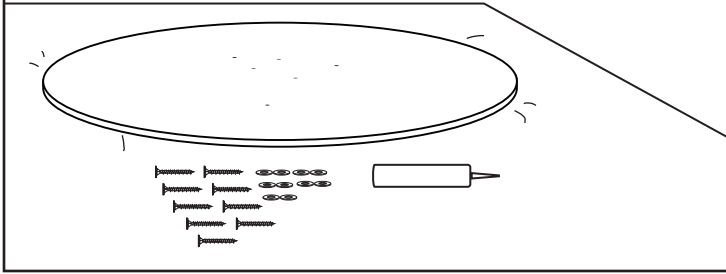


STEP 2: CENTER BASE

Position the base at the center of the table top. Ensure there is a 14" overhang from the edge of the tabletop to the outer edge of the base on all sides. If a second leg is required, ensure the overhang equals 14" on the two shorter sides (ends) and is centered (roughly 10-11.5" on the longer sides). Confirm base legs are evenly aligned before fastening.

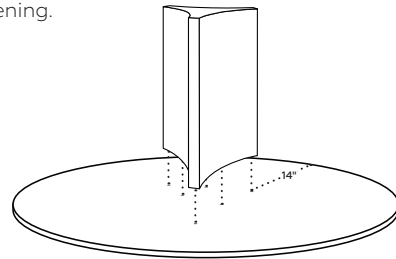


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

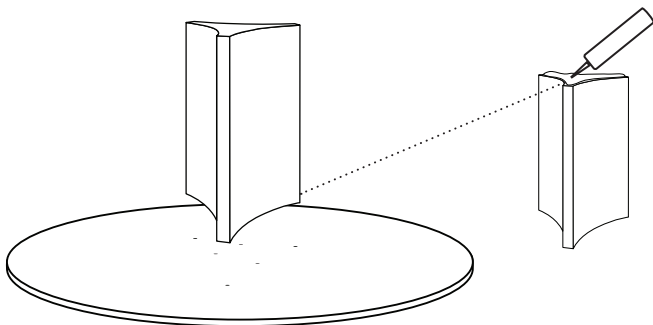

STEP 4: INSTALL SCREWS


Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

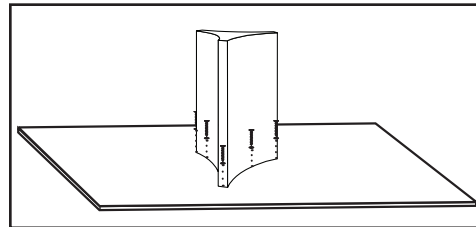

NOTE: If you chose a square or rectangular shaped table with a 6mm mitered edge, you will need to install screws with washers.


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

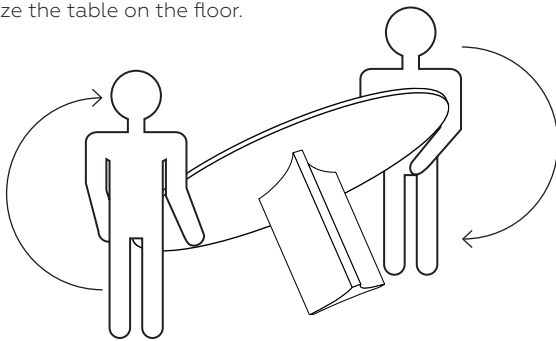

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

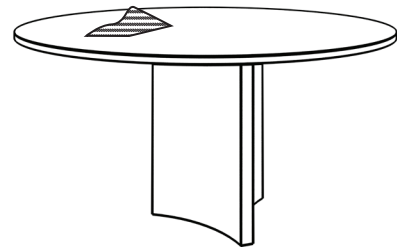

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



FORMA INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

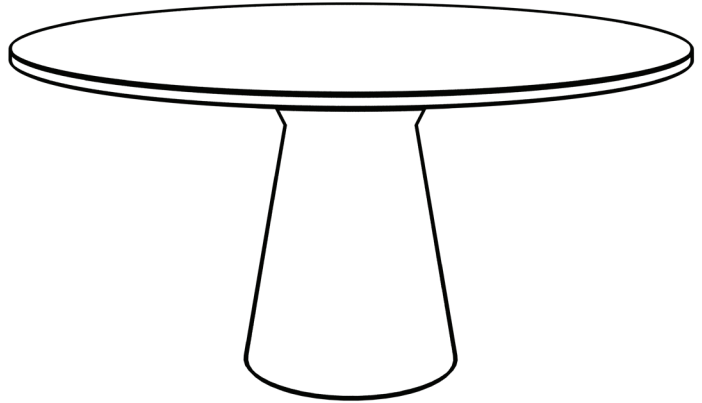

* Drawing for reference only. Base unit quantity may vary by size of the table.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:


- Table Top
- Table Base

Optional Components:


- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.

Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowe's Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowe's Item #: Clear - 9999582872 & White - 9999582871) (SSC Item #: Crystal - RDX4001 & Original - RDX4000)

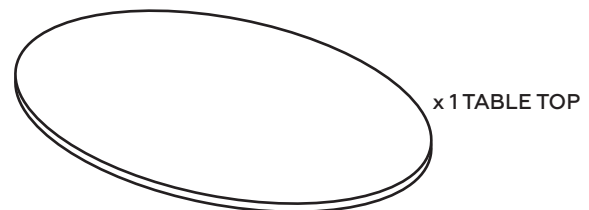

x 1 TABLE TOP

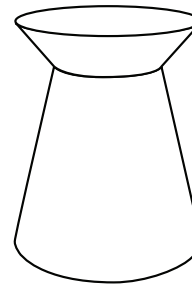


BASE COMPONENT

BOSTIK GRIP N GRAB™ ADVANCED HYBRID POLYMER ADHESIVE*
(Lowe's Item #4921302)

MAXISIL MAXIGRAB® HYBRID POLYMER STP ADHESIVE*
(Lowe's Item #: Clear - 9999582872 & White - 9999582871)
(SSC Item #: Crystal - RDX4001 & Original - RDX4000)


* Product not included but is required for installation.



(IF NECESSARY) LEVELING FEET


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

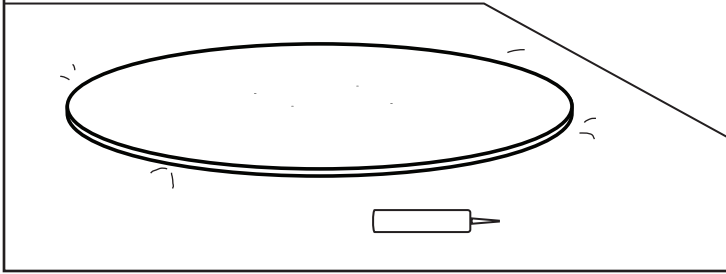


STEP 2: CENTER BASE

Position the base at the center of the table top. Ensure there is a 14" overhang from the edge of the tabletop to the outer edge of the base on all sides. Confirm base is evenly aligned before fastening.

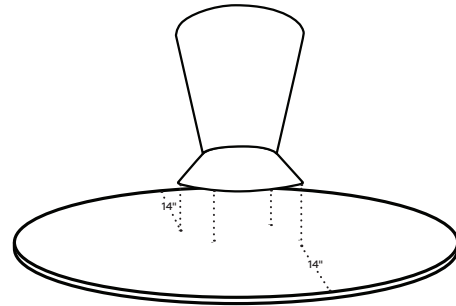


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

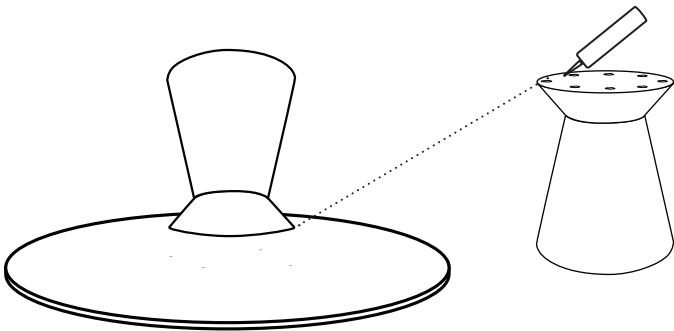


STEP 4: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

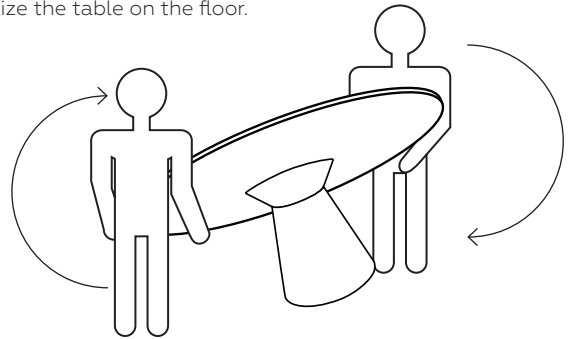

STEP 5: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

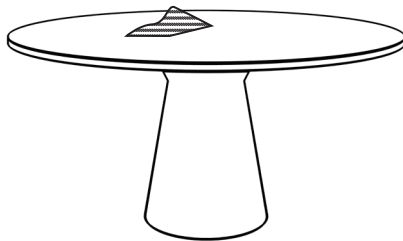

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



NEXUS INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

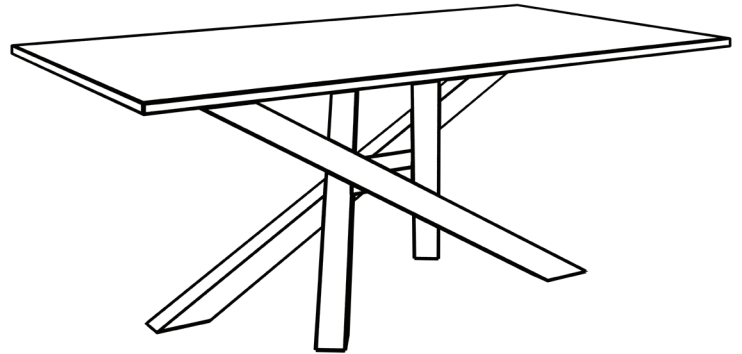

* Drawing for reference only.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:


- Table Top
- Table Base
- (6-12) Square-Drive Backer Board Screws
- (6-12) 1/4" Zinc Flat Washers

Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.


Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowe's Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowe's Item #s: Clear - 9999582872 & White - 9999582871) (SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

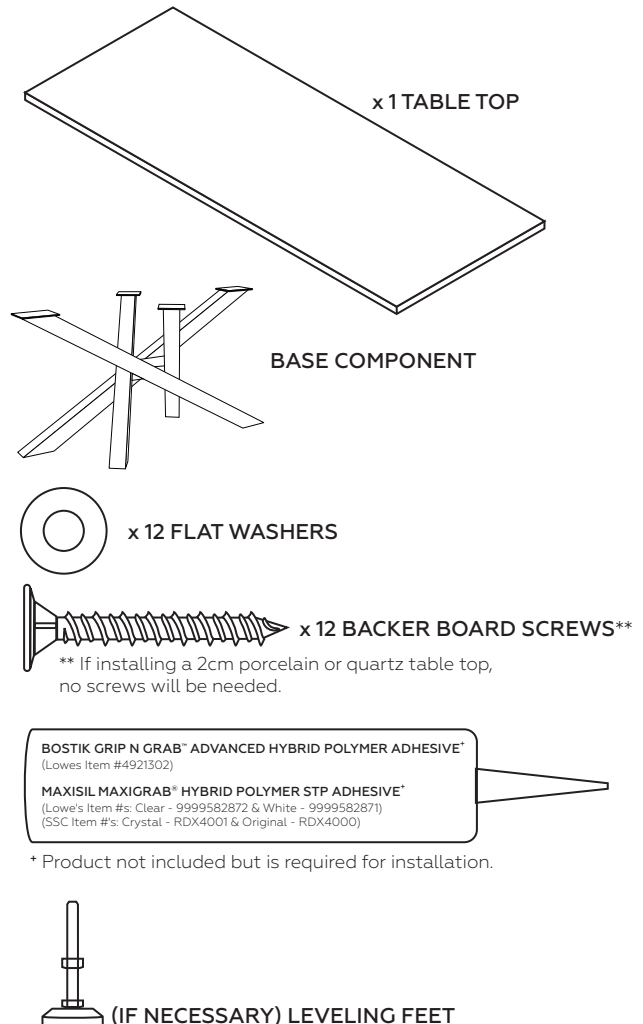


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

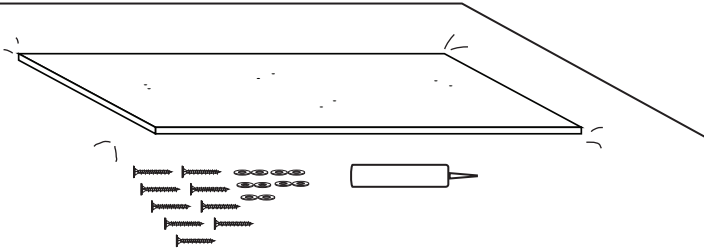


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure the overhang equals 14" on the two shorter sides (ends) and is centered (roughly 10-11.5" on the longer sides). Confirm base legs are evenly aligned before fastening.

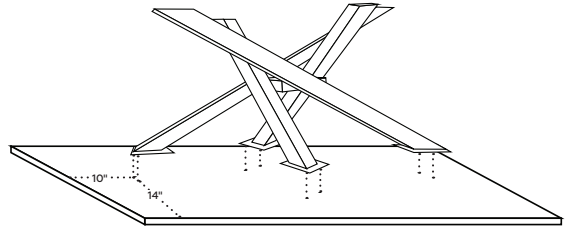


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

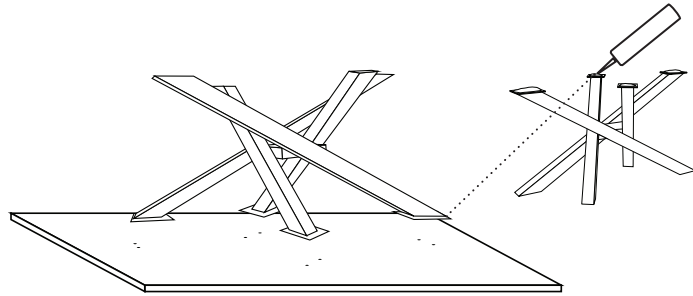


STEP 4: INSTALL SCREWS

Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

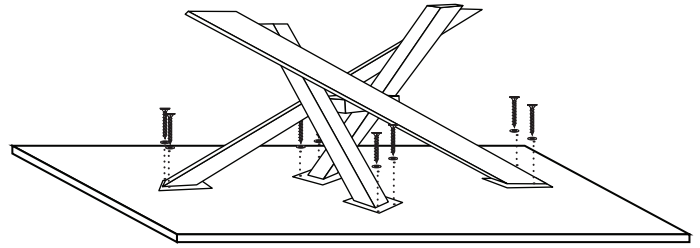


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

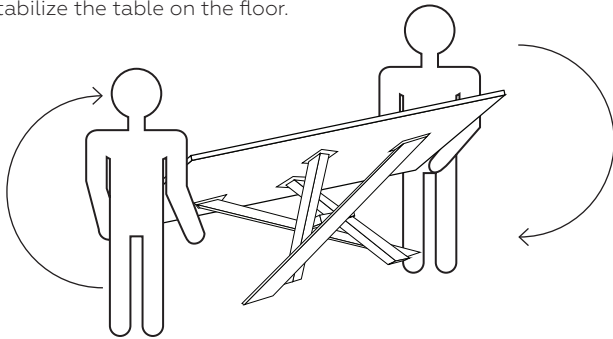

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

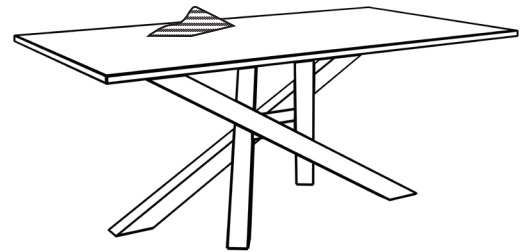

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



PRISMA INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

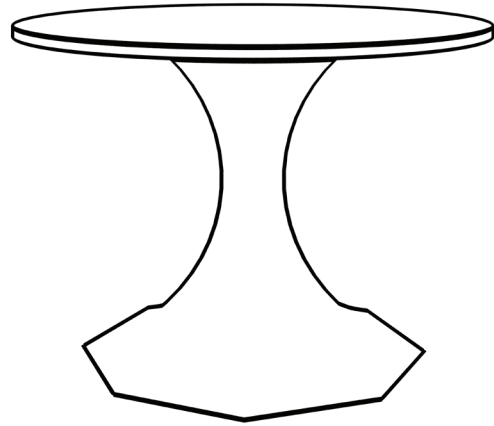

* Drawing for reference only.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:

- Table Top
- Table Base
- (6–12) Square-Drive Backer Board Screws
- (6–12) 1/4" Zinc Flat Washers


Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.


Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowes Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowes's Item #s: Clear - 9999582872 & White - 9999582871) (SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

Note: Options shown on circular tables may also be installed on square tables. Use screws when installing these options on square tables.

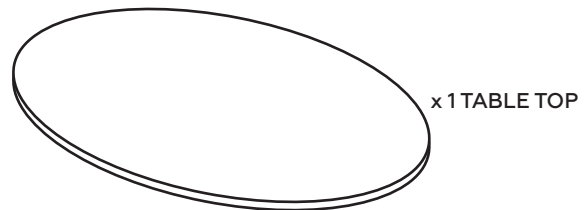

x 1 TABLE TOP



BASE COMPONENT



x 12 FLAT WASHERS




x 12 BACKER BOARD SCREWS**

** If installing a 2cm porcelain or quartz table top, no screws will be needed.

BOSTIK GRIP N GRAB™ ADVANCED HYBRID POLYMER ADHESIVE*
(Lowes Item #4921302)

MAXISIL MAXIGRAB® HYBRID POLYMER STP ADHESIVE*
(Lowes's Item #s: Clear - 9999582872 & White - 9999582871)
(SSC Item #s: Crystal - RDX4001 & Original - RDX4000)


* Product not included but is required for installation.



(IF NECESSARY) LEVELING FEET


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

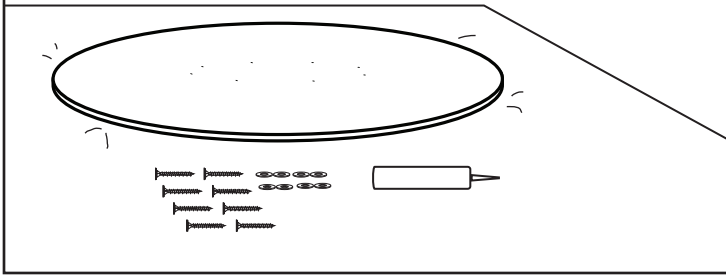


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure there is a 14" overhang from the edge of the tabletop to the outer edge of the base on all sides. Confirm base legs are evenly aligned before fastening.

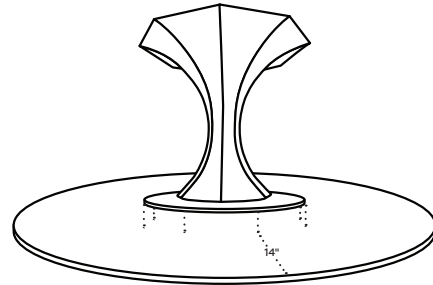


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

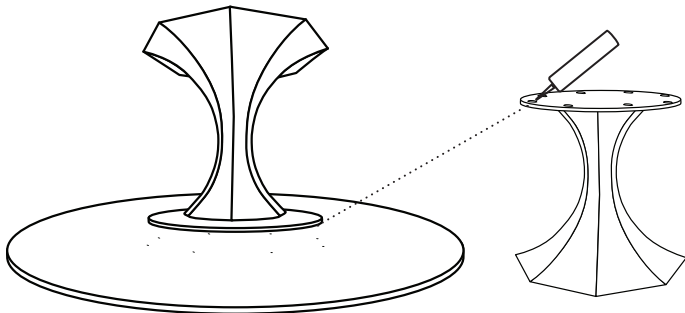

STEP 4: INSTALL SCREWS


Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

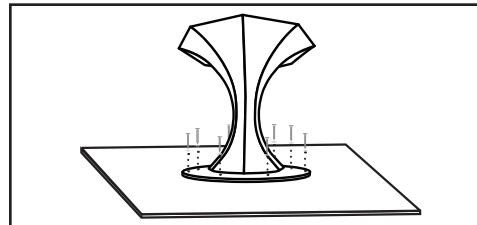

NOTE: If you chose a square shaped table with a 6mm mitered edge, you will need to install screws with washers.


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

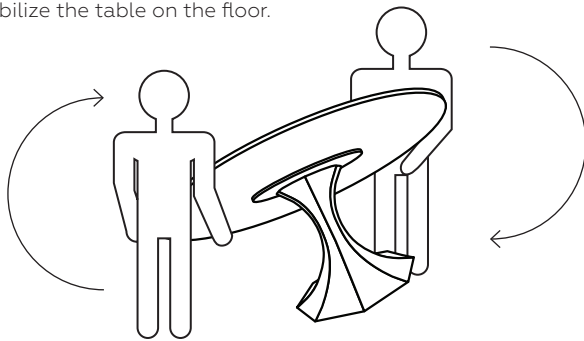

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

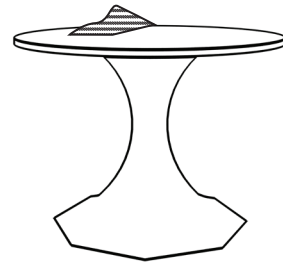

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



STRATA INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

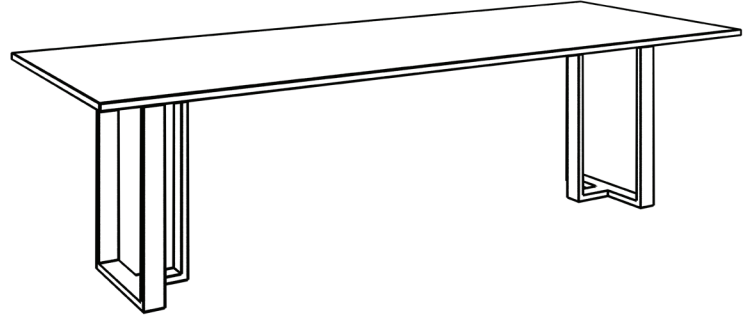

* Drawing for reference only.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:


- Table Top
- Table Base
- (6-12) Square-Drive Backer Board Screws
- (6-12) 1/4" Zinc Flat Washers

Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.


Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowe's Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowe's Item #s: Clear - 9999582872 & White - 9999582871) (SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

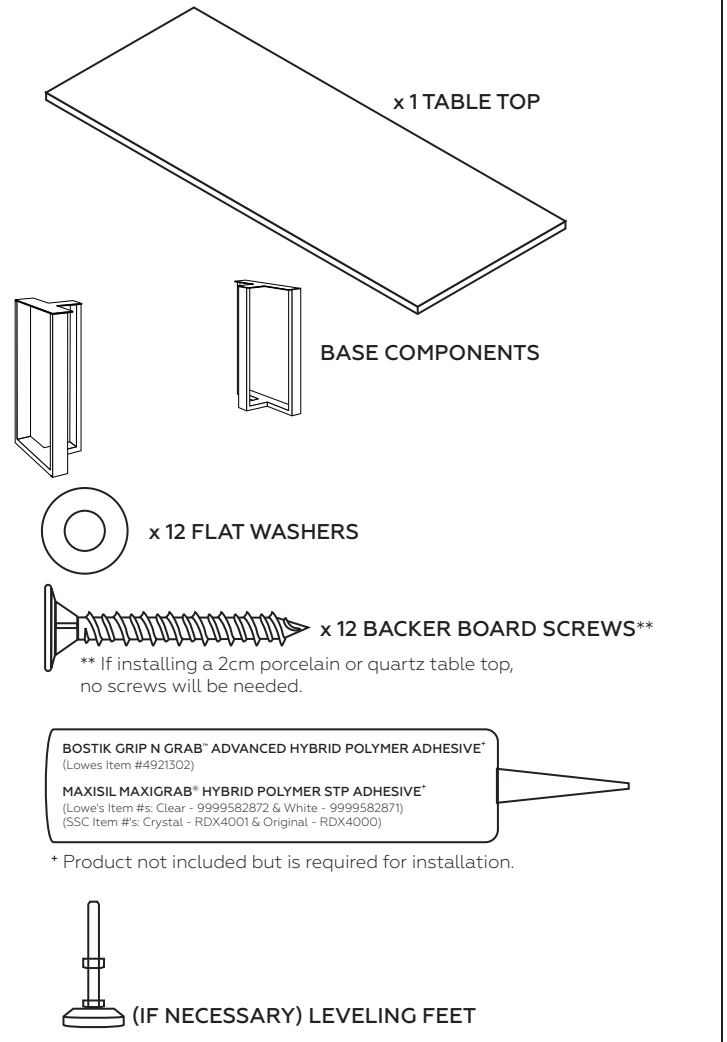


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

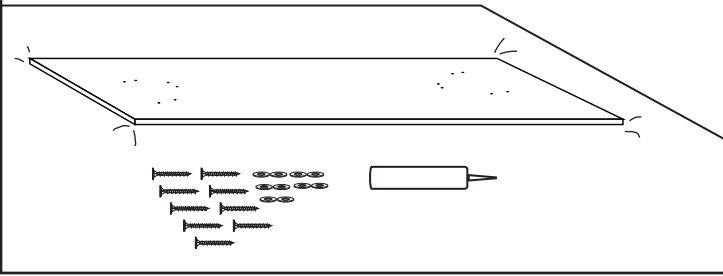


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure the overhang equals 14" on the two shorter sides (ends) and is centered (roughly 10-11.5" on the longer sides). Confirm base legs are evenly aligned before fastening.

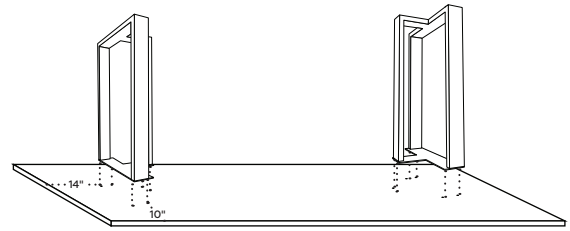


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

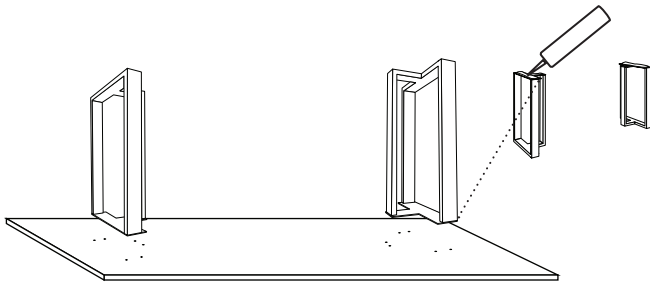


STEP 4: INSTALL SCREWS

Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

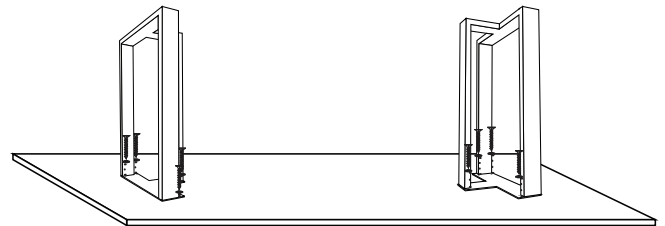


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

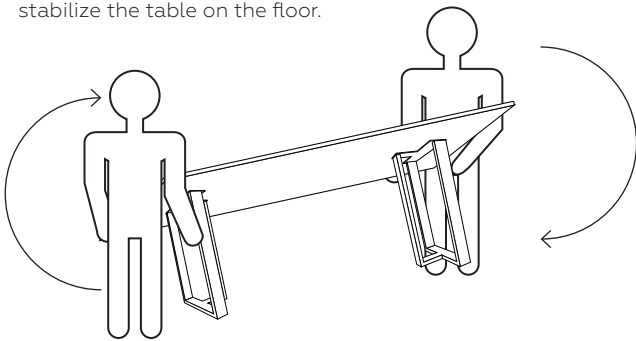

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

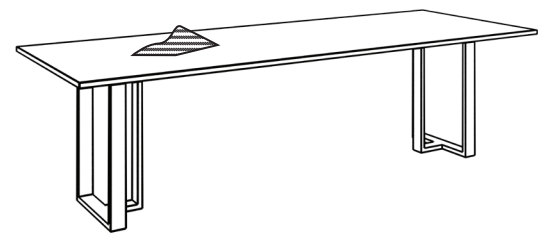

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



LINEA INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

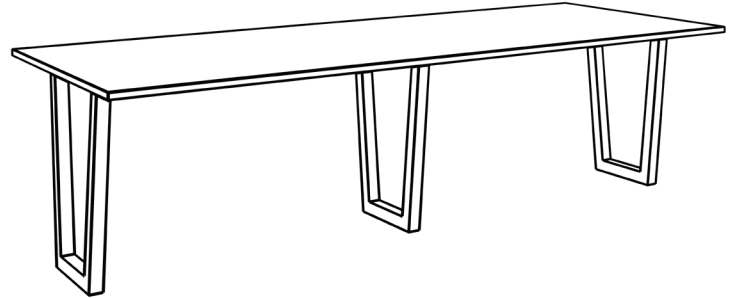

* Drawing for reference only. Base unit quantity may vary by size of the table.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:


- Table Top
- Table Base
- (6–12) Square-Drive Backer Board Screws
- (6–12) 1/4" Zinc Flat Washers

Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.

Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowes Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowes Item #s: Clear - 9999582872 & White - 9999582871) (SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

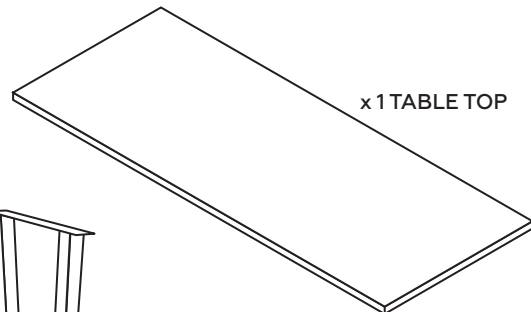

BASE COMPONENTS*

* Total will vary based on final table top size.



** If installing a 2cm porcelain or quartz table top, no screws will be needed.


BOSTIK GRIP N GRAB™ ADVANCED HYBRID POLYMER ADHESIVE*
(Lowes Item #4921302)
MAXISIL MAXIGRAB® HYBRID POLYMER STP ADHESIVE*
(Lowes Item #s: Clear - 9999582872 & White - 9999582871)
(SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

* Product not included but is required for installation.




STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

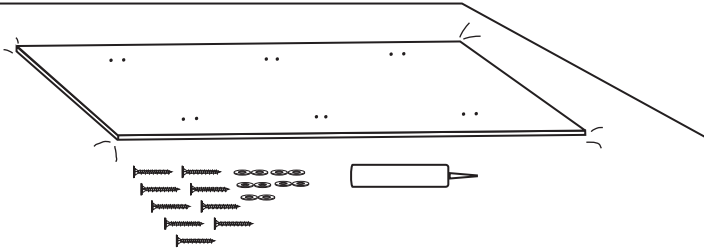


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure the overhang equals 14" on the two shorter sides (ends) and is centered (roughly 10-11.5" on the longer sides). If a third leg is provided, make sure it is centered between the left and right base legs in the middle of the table. Confirm base legs are evenly aligned before fastening.

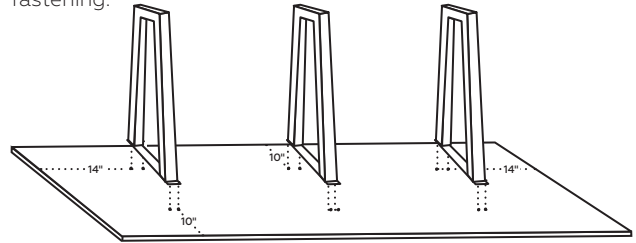


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

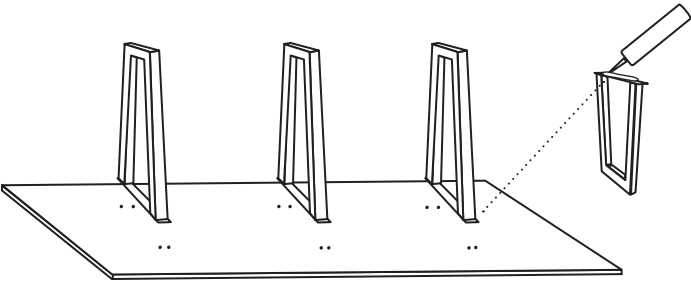


STEP 4: INSTALL SCREWS

Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

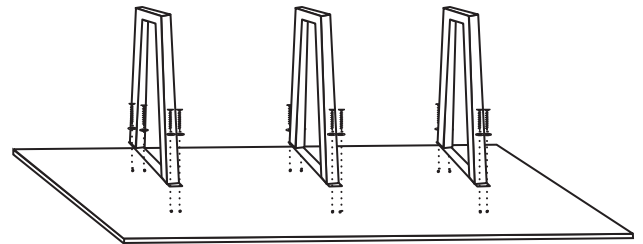


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

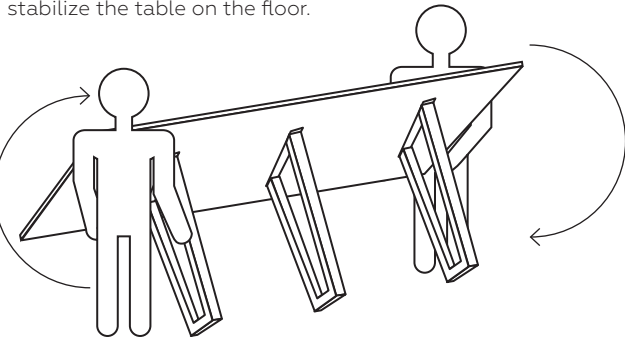

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

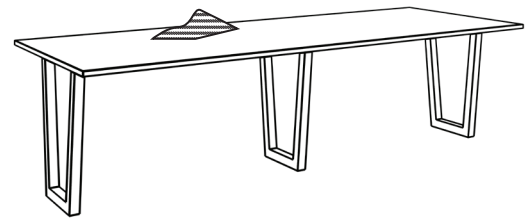

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



TERRA INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

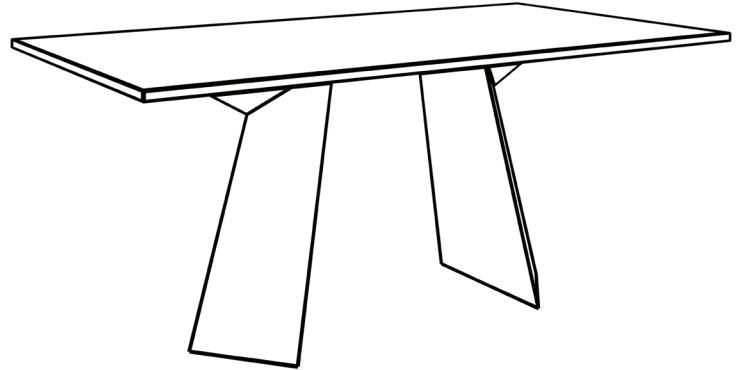

* Drawing for reference only.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:


- Table Top
- Table Base
- (6-12) Square-Drive Backer Board Screws
- (6-12) 1/4" Zinc Flat Washers

Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.

Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:


- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowe's Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowe's Item #s: Clear - 9999582872 & White - 9999582871) (SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

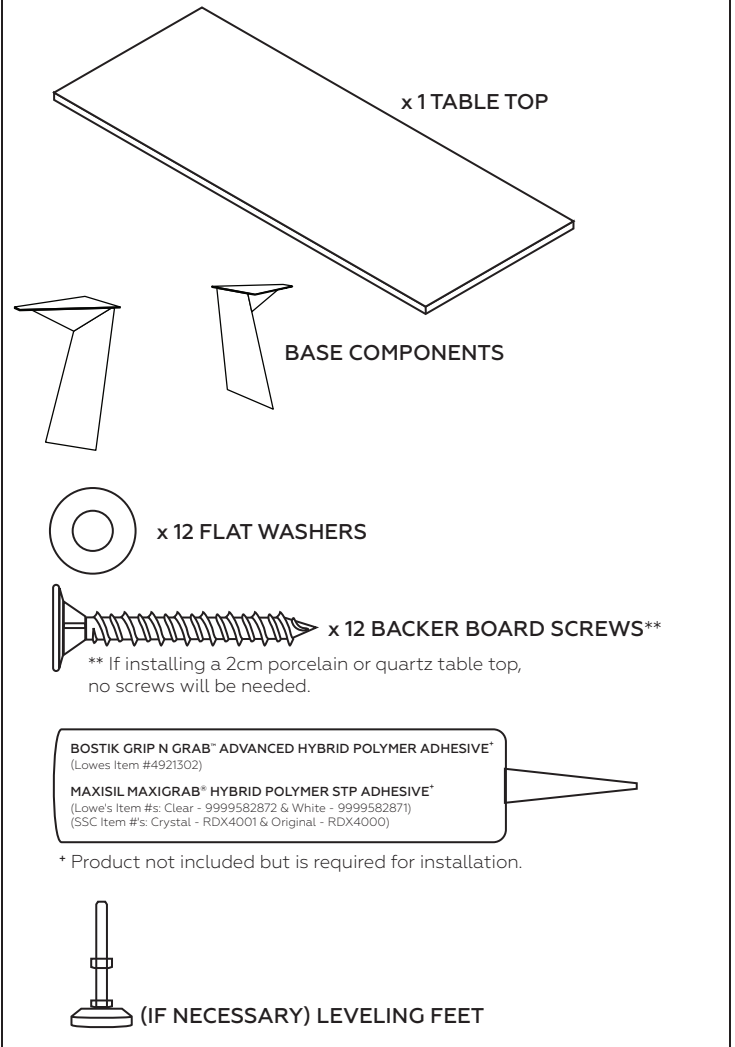

* Product not included but is required for installation.


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

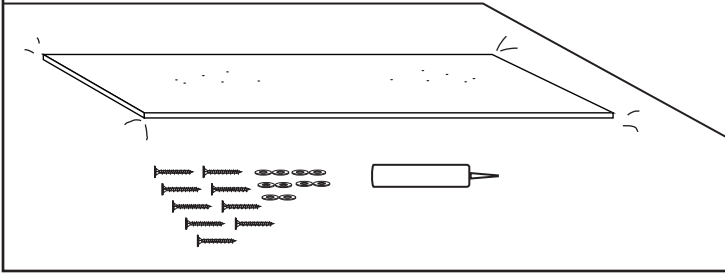


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure the overhang equals 14" on the two shorter sides (ends) and is centered (roughly 10-11.5" on the longer sides). Confirm base legs are evenly aligned before fastening.

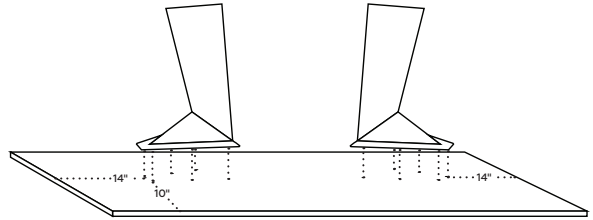


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

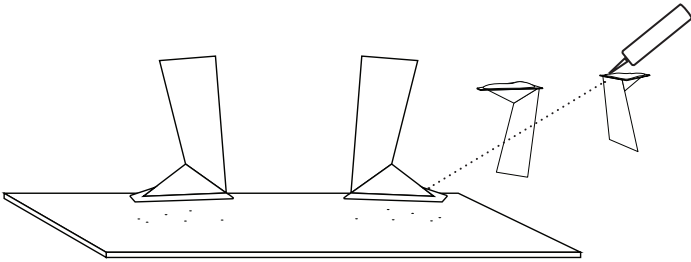


STEP 4: INSTALL SCREWS

Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

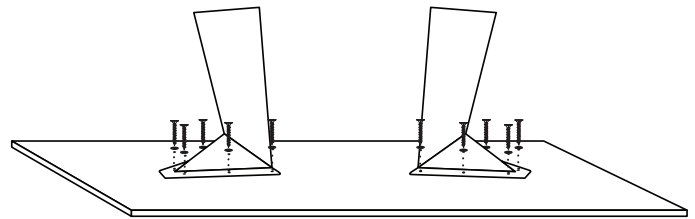


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

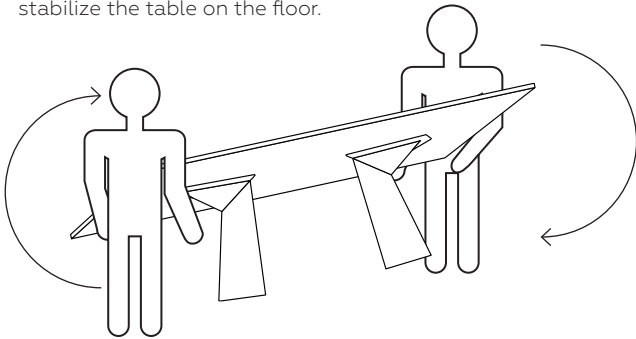

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

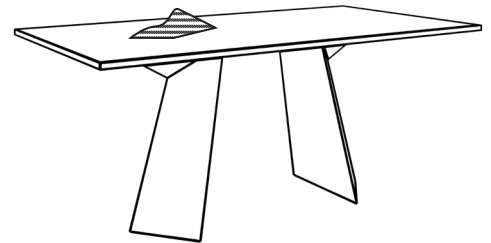

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



VECTOR INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

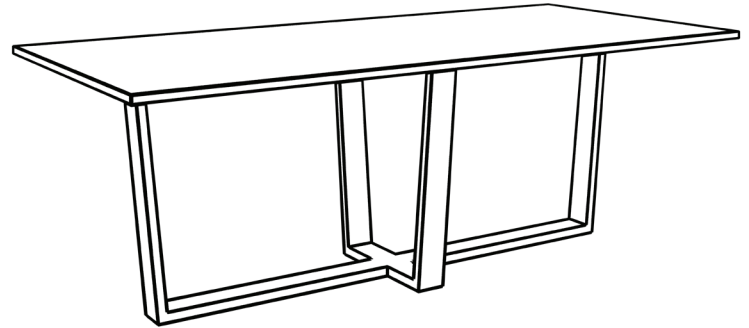

* Drawing for reference only.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:


- Table Top
- Table Base
- (6-12) Square-Drive Backer Board Screws
- (6-12) 1/4" Zinc Flat Washers

Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.

Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowes Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowes's Item #: Clear - 9999582872 & White - 9999582871) (SSC Item #: Crystal - RDX4001 & Original - RDX4000)

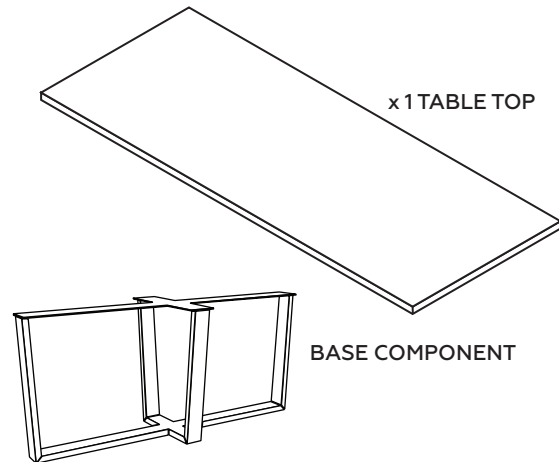

x 12 FLAT WASHERS




x 12 BACKER BOARD SCREWS**

** If installing a 2cm porcelain or quartz table top, no screws will be needed.

BOSTIK GRIP N GRAB™ ADVANCED HYBRID POLYMER ADHESIVE*
(Lowes Item #4921302)

MAXISIL MAXIGRAB® HYBRID POLYMER STP ADHESIVE*
(Lowes's Item #: Clear - 9999582872 & White - 9999582871)
(SSC Item #: Crystal - RDX4001 & Original - RDX4000)


* Product not included but is required for installation.



(IF NECESSARY) LEVELING FEET


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

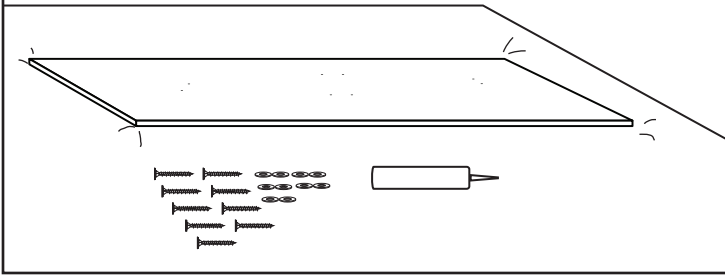


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure the overhang equals 14" on the two shorter sides (ends) and is centered (roughly 10-11.5" on the longer sides). Confirm base legs are evenly aligned before fastening.

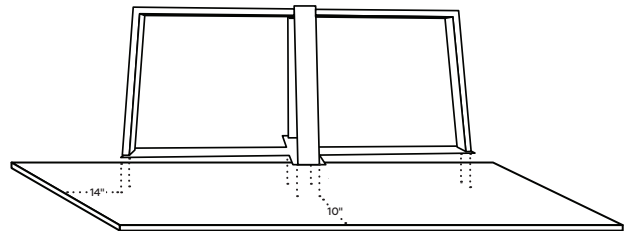


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

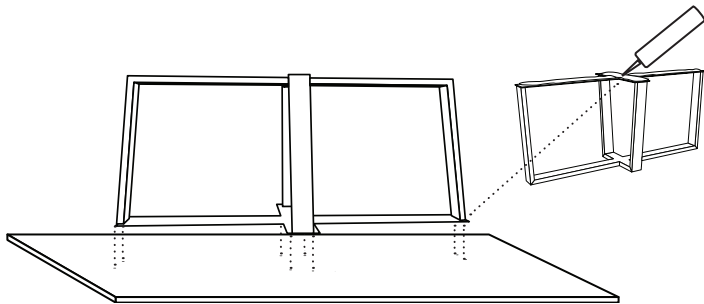


STEP 4: INSTALL SCREWS

Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

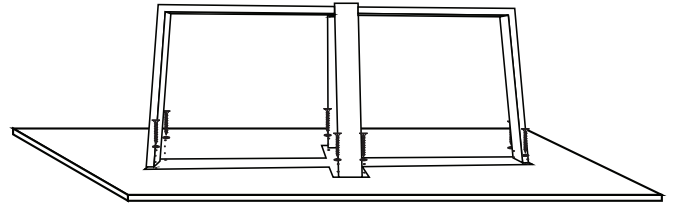


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

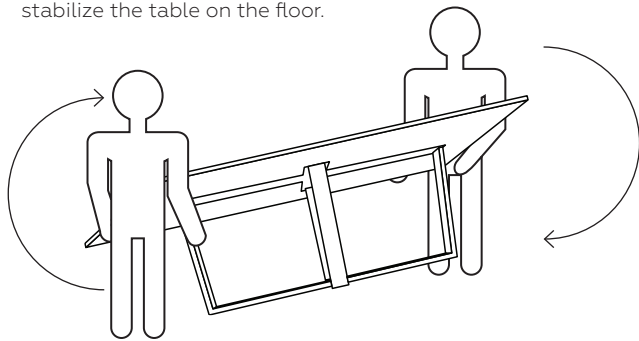

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

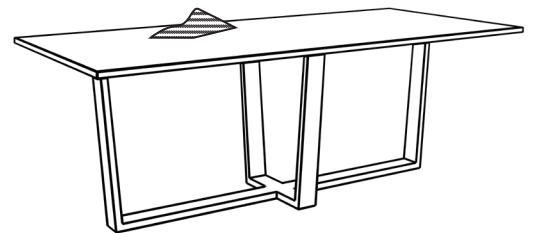

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.



VERTEX INSTALLATION GUIDE

TABLE SURFACE SAFETY & HANDLING


Porcelain and quartz table surfaces are heavy and must be handled with care. Always use two or more people when lifting or moving the table top, and keep the table surface fully supported at all times. Place only on a clean, padded, stable surface to prevent damage.

Do not drag the table surface or allow edges to hit hard surfaces. Keep hands clear of pinch points when positioning onto the base.

Make sure the back of the table surface is clean and dry before installation. After installation, wipe the surface with a soft cloth. Do not use abrasive cleaners.

Table surfaces are extremely heavy and must be handled with full attention to maintain control.

Improper handling may result in damage or injury.

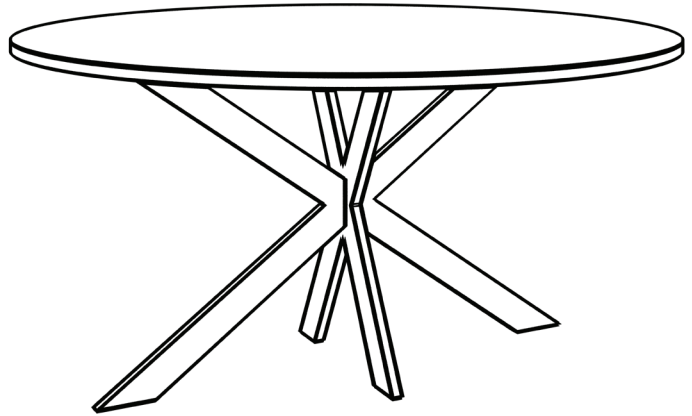

* Drawing for reference only.

HARDWARE & COMPONENTS INCLUDED

Each Tables By Design™ assembly package includes the hardware required for proper installation. Verify all contents before beginning assembly.

Included In Box:

- Table Top
- Table Base
- (6-12) Square-Drive Backer Board Screws
- (6-12) 1/4" Zinc Flat Washers


Optional Components:

- Leveling Feet
Use leveling feet if needed to ensure the table sits evenly on the floor surface.


Not Included but Required – Available At Your Local Daltile Service Center Or Lowes Store:

- Bostik Grip N Grab™ Advanced Hybrid Polymer Adhesive (Lowe's Item #4921302)
- Maxisil Maxigrab® Hybrid Polymer STP Adhesive (Lowe's Item #s: Clear - 9999582872 & White - 9999582871) (SSC Item #s: Crystal - RDX4001 & Original - RDX4000)

Note: Options shown on circular tables may also be installed on square/rectangular tables. Use screws when installing these options on square/rectangular tables.

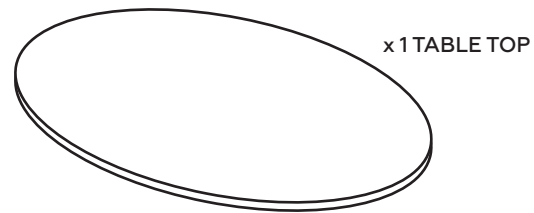

x 1 TABLE TOP



BASE COMPONENT



x 12 FLAT WASHERS



x 12 BACKER BOARD SCREWS**

** If installing a 2cm porcelain or quartz table top, no screws will be needed.

BOSTIK GRIP N GRAB™ ADVANCED HYBRID POLYMER ADHESIVE*
(Lowe's Item #4921302)

MAXISIL MAXIGRAB® HYBRID POLYMER STP ADHESIVE*
(Lowe's Item #s: Clear - 9999582872 & White - 9999582871)
(SSC Item #s: Crystal - RDX4001 & Original - RDX4000)


* Product not included but is required for installation.



(IF NECESSARY) LEVELING FEET


STEP 1: PREPARE THE TABLE

Place table top upside down on a clean, padded surface. Have tools ready. Clean and dry the back of the table surface with a damp cloth before installation.

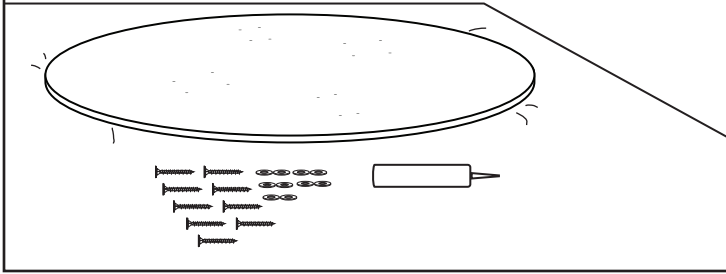


STEP 2: CENTER BASE

Position the base legs at the center of the table top. Ensure there is a 14" overhang from the edge of the tabletop to the outer edge of the base on all sides. Confirm base legs are evenly aligned before fastening.

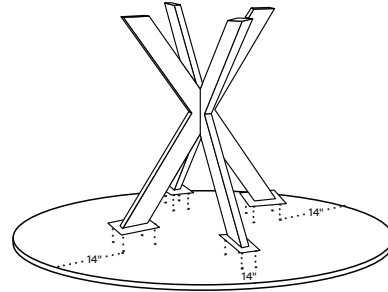


STEP 3: APPLY ADHESIVE

Apply recommended adhesive at every contact location between base and table surface, ensuring all base touchpoints are covered.

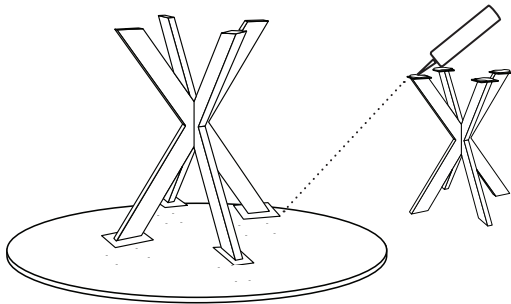

STEP 4: INSTALL SCREWS


Locate all base touchpoints (4-6 locations). For porcelain tables with a mitered edge, install screws with washers at every touchpoint. For 2cm porcelain or quartz tables, screws are **not** required.

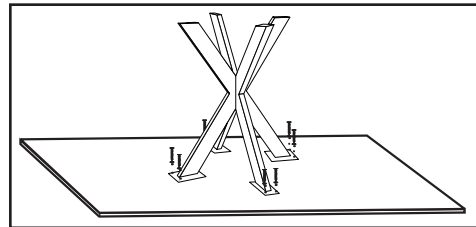

NOTE: If you chose a square or rectangular shaped table with a 6mm mitered edge, you will need to install screws with washers.


STEP 5: SET TABLE UPRIGHT & LEVEL

Allow at least 5 minutes for adhesive to dry. With two or more people, carefully turn table upright. Install leveling feet if needed to stabilize the table on the floor.

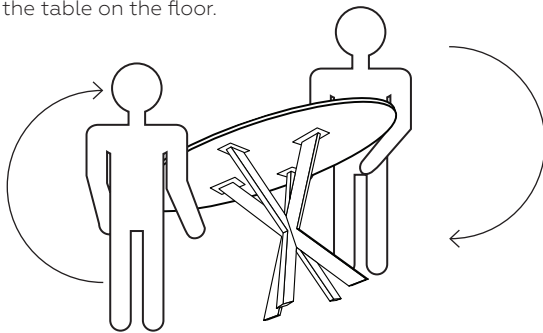

STEP 6: FINAL CLEANING & INSPECTION

Wipe the table surface after installation is complete with a damp cloth. Confirm the base is secure, table is level, and feet are adjusted.

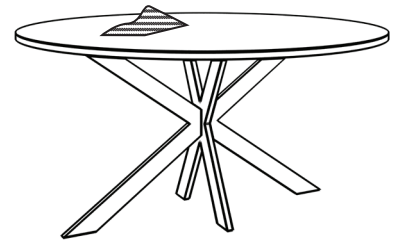

CLEANING & MAINTENANCE

Porcelain and quartz table surfaces are easy to maintain. Use a microfiber cloth to remove dust from the surface. For daily cleaning, use warm water with mild detergent, then rinse and dry.

Clean spills promptly to prevent stains. Avoid waxes, oil soaps, abrasive cleaners, harsh scouring pads or products with harsh acids, bleach or strong alkalines, as they can damage the surface. Always follow cleaner instructions.

For stubborn or dried spills, use a nonabrasive cleaning pad combined with a small amount of mild soap or specialized stone cleaner. Keep the surface clean, dry, and residue-free for best results.

Scan QR Code For Full Care & Maintenance Guidelines.



Scan QR Code To View Video Installation Instructions.

