

MARBLE LOOK

VANSERRA™
GLAZED PORCELAIN

VANSERRA™

GLAZED PORCELAIN

Experience the sublime elegance of Vanserra—where natural stone transcends ordinary design. Our extravagant 33 x 33 format offers a timeless, seamless aesthetic that endures the trends. Choose from three of our most coveted marble looks, featuring authentic, artful veining that captures nature's raw beauty. With Vanserra, every detail is a statement of opulence, where exquisite design meets unparalleled quality.


MARBLE LOOK

USAGE



SPECIAL FEATURES

SEE CHARTS FOR FULL PRODUCT DETAILS.



Cover photo features Opal, 33 x 33 on the floor.
Above photo features Platinum, 33 x 33 on the floor and back wall.

MARBLE LOOK

VANSERRA™


GLAZED PORCELAIN

SIZES:

33 x 33
Floor Tile

FINISHES: MATTE | POLISHED

GLAZED PORCELAIN FLOOR

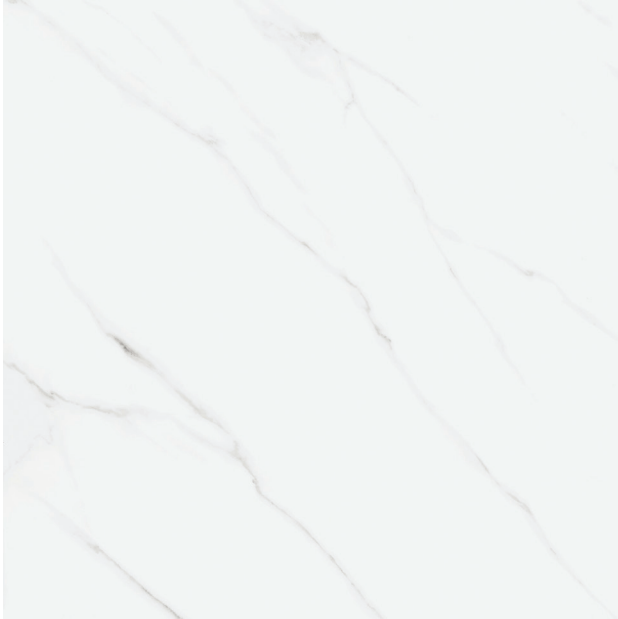

LACE VA20



OPAL VA21



PLATINUM VA22



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT






CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Finish
	33 x 33 Floor Tile	33-1/16" x 33-1/16" 84.00 cm x 84.00 cm	5/16"	 

 Matte Finish  Polished Finish

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	6.0 (Matte) 5.0 (Polished)
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at:
daltille.com/information/TestResults.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	


A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Matte finish only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Random (V4)

DURABILITY

Floor Surface Wear Resistance		
1	Residential Bathrooms	③ All Residential / Light Commercial*
2	All Residential Areas	④ All Residential / Commercial**

* Polished finish only.
** Matte finish only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at:
daltille.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit daltille.com.

FEATURES



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.